Received: 30 November 2024 | Revised: 24 March 2025 | Accepted: 7 May 2025 | Published online: 9 June 2025

RESEARCH ARTICLE

Journal of Computational and Cognitive Engineering
2025, Vol. 00(00) 1–16
DOI: 10.47852/bonviewJCCE52024933

BON VIEW PUBLISHING

Directional Antenna Based Scheduling Protocol for IoT Networks

Anil Carie[1], Abdur Rashid Sangi[2,3,*], Satish Anamalamudi[1], Murali Krishna Enduri[1], Baha Ihnaini[2,3] and Hemn Barzan Abdalla[2,3]

[1]*SRM University-AP, India*

[2]*Wenzhou-Kean University, China*

[3]*Kean University, USA*

Abstract: Contemporary IoT networks can potentially connect millions of devices. However, as these networks expand, power consumption, throughput, and interference become increasingly important. In this paper, we present the Directional Scheduling protocol for constrained 6TiSCH-IoT networks to enhance network performance through directional antennas. Unlike conventional omnidirectional antenna-based systems, which have low spatial reuse and high interference, the proposed protocol allows multiple nodes to transmit simultaneously, reducing interference and enhancing delivery. The protocol is decentralized, so every IoT node can locally decide the next transmission time based on local knowledge. This paper presents the system model, focusing on antenna configuration, energy consumption, and the scheduling policy. Supporting Contiki-NG/Cooja mesh validation shows a 4.58-fold mean delivery gain for 64 nodes with 90-degree beams, a 48.8 percent mean application-delay reduction for 32 nodes with 45-degree beams, and a 28.9 percent mean transmission-only energy saving for 64 nodes with 45-degree beams, each across five seeds. These results occur at separate operating points relative to matched omnidirectional configurations. The energy result uses a fixed-power proxy aligned with the model and is not a total battery-energy reduction. These results indicate that the approach can improve spatial reuse and delivery under the evaluated conditions. Further research may examine AI techniques to enhance scheduling and resource allocation, alongside dual-configuration antenna systems with lower hardware complexity.

Keywords: 6TiSCH, 6top, distributed algorithm, directional antennas

1. Introduction

The Internet of Things (IoT) has the potential to meet the demands of rapidly evolving wireless technologies, each with distinct infrastructural needs [1–9]. IoT facilitates the connection of heterogeneous networks (such as Wi-Fi, Bluetooth, etc.) [10] to the internet, creating a new paradigm for information analysis and decision-making. However, as these networks expand, challenges such as power consumption, throughput, and interference become increasingly significant [4, 6].

The IEEE 802.15.4e is being proposed as a protocol for IoT, defining the medium access control (MAC) and physical layers of Low-Power and Lossy Networks, which have facilitated increased IoT deployment. One of the five MAC operation modes in the IEEE 802.15.4e protocol is Time Slotted Channel Hopping (TiSCH) [7]. In TiSCH, all IoT nodes use a common schedule to determine the time slot and channel for communication with their one-hop neighbors. However, the standard does not specify how the schedule should be constructed and updated. As IoT becomes integrated into everyday life, IoT-enabled nodes generate high volumes of heterogeneous traffic [8]. The routing and scheduling implemented in this standard directly affect node energy consumption and propagation delay.

Due to the resource constraints of sensor nodes, the Internet Engineering Task Force (IETF) is developing various efficient low-energy communication standards [5]. The IETF 6TiSCH working group outlines a mechanism that combines the high reliability and low-energy consumption of IEEE 802.15.4e TiSCH with the IP protocol. This integration ensures interoperability and smooth application data transmission. The 6TiSCH Operation Sublayer (6top) defines a scheduling function (SF0) that adds or deletes cells between neighboring IoT nodes by monitoring and collecting user data. However, the current implementation of the scheduling function in 6TiSCH operates in an omnidirectional mode.

Using directional antennas can significantly reduce power consumption and minimize one-hop interference with neighboring nodes [9]. Additionally, multiple IoT nodes within the same coverage area can communicate more effectively by enhancing spatial reuse. However, to fully leverage directional transmission, an efficient MAC protocol must be designed to address issues such as deafness and hidden terminal problems.

The 6TiSCH nodes are synchronized based on a common frame structure along with a transmission schedule. However, the key

***Corresponding Author:** Abdur Rashid Sangi, Wenzhou-Kean University, China and Kean University, USA. Email: rsangi@kean.edu

© The Author(s) 2025. Published by BON VIEW PUBLISHING PTE. LTD. This is an open access article under the CC BY License (https://creativecommons.org/licenses/by/4.0/).

problem with IEEE 802.15.4e (Figure 1) is that it doesn't specify the time slot scheduling protocol. In this work, a directional antenna-based distributed scheduling is being proposed where every IoT node prepares its schedule in a distributed mode. Since sensor nodes exchange data frequently, an efficient MAC design should be proposed to allocate the time slot for the node intending for communication. Our protocol uses directional antennas for sending and receiving the application data in between one-hop neighbor IoT nodes. This needs to have strict node synchronization during the cell schedule with its neighbor. To address the issue, this paper starts with a discussion of the use of directional antennas in the 6TiSCH network to reduce interference and increase spatial reuse. Later, a distributed scheduling strategy is explored to determine the available slots when a node needs to either send or receive messages from its one-hop IoT neighbor nodes. The main contributions of this proposed work are as follows:

1) **Directional Scheduling Protocol**: Our protocol incorporates **directional antennas** for **6TiSCH IoT networks**, which significantly improves **spatial reuse**, reduces **interference**, and enhances **network throughput** compared to traditional **omnidirectional antenna-based protocols**.
2) **Decentralized Scheduling**: We present a **decentralized scheduling approach** where each IoT node locally determines its scheduling based on neighboring node information, supporting distributed scheduling decisions.
3) **Energy Efficiency**: Through the use of **directional antennas**, our protocol achieves transmission-only energy savings in the evaluated configurations by reducing unnecessary transmissions and focusing the energy toward the intended target, unlike conventional systems that use **omnidirectional transmission**.

The rest of the paper is organized as follows. Section 2 presents a brief review of literature on IoT-enabled MAC protocols and 6TiSCH scheduling algorithms. Section 4 describes the system model, antenna model, assumptions, and the proposed work. Section 7 explains the simulation results and analysis of the proposed model. Finally, Section 8 presents the conclusion and insights of future work.

2. Related Work

In the following two subsections, the focus is on existing energy conservation techniques and the scheduling algorithm for the IoT networks.

2.1. IoT MAC protocols

The design of MAC protocols significantly influences communication efficiency, energy management, and security in IoT networks. Several MAC protocols have emerged to meet these diverse IoT application requirements.


Multimedia IoT applications require adaptive MAC protocols capable of managing extensive multimedia-on-demand traffic effectively. Recent studies, such as Nauman et al. [11], have highlighted the significance of dynamic MAC protocols that adapt to varying multimedia traffic, emphasizing quality of service (QoS) and latency minimization. Additionally, Parra et al. [12] address scalability challenges specifically in Direct-to-Satellite IoT scenarios, proposing accurate network size estimation techniques essential for efficient MAC resource management in satellite-based communications.

Security in the MAC layer has also been a critical area of research, with recent approaches leveraging MAC protocol attributes to enhance network security. For instance, Nayak and Bhattacharyya [13] explore MAC protocol-based intrusion detection frameworks tailored to IoT networks, identifying and mitigating potential security threats through MAC-layer analytics. Such integration between MAC protocol operations and security measures contributes significantly to more resilient IoT deployments.

Cross-layer MAC and routing integration is vital for applications demanding high reliability and minimal delay. Kim et al. [14] outline a cross-layer approach that utilizes IEEE 802.15.4 standards to enhance reliability and latency performance in industrial IoT applications. Similarly, Subramanyam et al. [15] investigate cooperative optimization strategies within distributed IoT frameworks, underlining the benefits of cross-layer cooperation for improved network robustness and energy efficiency.

Given the variety and complexity of MAC protocols, Amin et al. [16] provide a comprehensive overview of medium access and

Figure 1
Superframe structure of IEEE 802.15.4

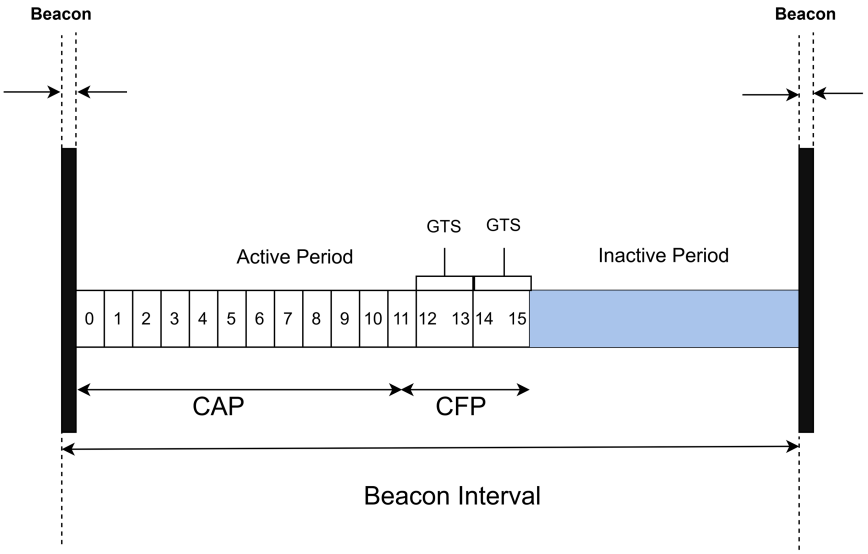

radio duty cycling strategies in IoT, revealing essential insights into energy efficiency and performance optimization. Energy harvesting MAC protocols, detailed in Famitafreshi et al. [17], have also gained attention for their potential to extend the lifetime of IoT networks by effectively utilizing ambient energy sources.

Several empirical studies, such as Afroz and Braun [18], explore enhanced variants of existing MAC protocols, including the Extended QX-MAC for IoT-based sensor networks, highlighting performance improvements through empirical validation. Traffic-aware protocols, as studied in Nguyen et al. [19], emphasize priority mechanisms in managing diverse IoT traffic demands, particularly for critical applications such as agricultural IoT, as comprehensively reviewed by Effah et al. [20].

Protocols designed specifically for satellite IoT applications are analyzed in Fernandez et al. [21], discussing on-demand payload strategies crucial for satellite communication efficiency. An integrated intrusion detection and prevention mechanism in the MAC layer, proposed by Krishnan et al. [22], further expands the security landscape by incorporating adaptive features into the MAC protocol design.

A broad review presented in Khisa and Moh [23] discusses the fundamental MAC protocols for IoT, identifying key factors influencing protocol effectiveness across diverse applications. Studies addressing security threats, such as jamming attacks and their impact on MAC-layer performance, are methodically discussed in Kerrakchou et al. [24]. Additionally, energy-efficient and low-latency MAC protocols, essential for real-time IoT applications, are explored comprehensively by Ahmad et al. [25].

Predictive MAC-layer optimization techniques have been advanced in El Houssaini et al. [26], demonstrating the efficacy of predictive analytics for mitigating delays and enhancing MAC performance. Efficient MAC protocols tailored specifically for Unmanned Aerial Vehicle (UAV)-assisted IoT networks are analyzed in Olatinwo et al. [27], highlighting adaptations necessary to accommodate the unique mobility and communication requirements of UAVs.

Cooperation-based adaptive MAC designs, proposed by Mahmud et al. [28], emphasize reliable communications in dynamic IoT environments through cooperative MAC strategies. Scheduling efficiency for the TiSCH mode is critically evaluated in Kim et al. [29], providing insights into multiple slot-frame scheduling mechanisms beneficial for low-power IoT applications.

Scalable and energy-efficient MAC protocol designs, such as the RESS-IoT protocol presented in Ortigueira et al. [30], provide robust frameworks for satellite IoT systems. Network performance metrics relevant to energy efficiency in MAC protocol designs have been systematically reviewed by Engmann et al. [31], underlining key performance indicators for IoT systems. Trust-aware MAC and routing protocols are discussed in Yang et al. [32], highlighting the intersection of security, trust, and efficiency in IoT communications.

Priority-aware MAC protocols adapted for UAV-assisted IoT scenarios are detailed in Khisa and Moh [33], demonstrating how priority-based approaches effectively support time-sensitive data transmission in mobile IoT environments. Analytical assessments of MAC protocols for wireless sensor networks (WSN), as provided in Zhang and Wang [34], deliver critical evaluations necessary for selecting optimal MAC strategies based on specific deployment contexts.

Finally, adaptive MAC protocols employing reinforcement learning techniques, such as the Q-learning-based protocol detailed in Wu et al. [35], showcase advanced artificial intelligence (AI)-driven approaches to dynamically optimize IoT network performance based on real-time conditions and feedback.

These reviewed studies collectively emphasize that successful IoT MAC protocol design should incorporate adaptive scheduling, advanced security mechanisms, cross-layer optimization, scalability considerations, and innovative energy management techniques to fully accommodate the diverse and evolving requirements of IoT networks.

2.2. Scheduling algorithms for 6TiSCH

The 6TiSCH (IPv6 over TiSCH) framework has emerged as a critical solution for deterministic communication in IoT networks, particularly those requiring low latency, high reliability, and energy efficiency. Recent research has substantially contributed toward improving the scheduling mechanisms within 6TiSCH networks.

Rady et al. [36] characterized the performance trade-offs associated with the 6TiSCH minimal scheduling function, highlighting the critical balance required between energy efficiency and latency. Extending this, Rady et al. [37] introduced 6TiSCH, a generalized scheduling framework supporting multiple physical layer configurations for agile networking.

Adaptive scheduling was explored by Lee [38], who proposed cell negotiation techniques to dynamically allocate network resources based on real-time conditions. Chang et al. [39] provided insights into MSF implementation and standardization challenges within the IETF, emphasizing scalability improvements. Ha and Chung [40] introduced traffic-aware routing methods to optimize network efficiency and load balancing in industrial IoT scenarios.

Tanaka et al. [41] introduced YSF, a scheduling function designed explicitly to minimize latency for industrial IoT applications. Similarly, Kotsiou et al. [42] proposed the Low-Latency Distributed Scheduling Function to reduce delays in distributed IoT systems.

Elsas et al. [43] reviewed recent advances in multi-modal industrial IoT networks, emphasizing adaptive and efficient scheduling solutions. Kumar and Kolberg [44] proposed DeSSR, a decentralized broadcast-based scalable scheduling solution for IoT networks, addressing scalability and decentralization challenges.

Fahad et al. [45] investigated multi-queue priority-based scheduling to enhance IoT network performance, particularly in scenarios demanding differentiated service quality. Pratama et al. [46] leveraged Q-learning methods to develop low-latency, distributed scheduling algorithms enhancing responsiveness in dynamic network conditions.

Righetti et al. [47] critically analyzed the CoAP congestion control strategies over 6TiSCH networks, providing insights into congestion mitigation and efficient resource utilization. Pradhan et al. [48] presented low-latency autonomous scheduling for industrial IoT, significantly improving real-time communication capabilities.

The scheduling of distributed renewable energy resources in IoT systems was explored by Nengroo et al. [49], highlighting energy-aware scheduling's role in sustainable IoT network operation. Amiri et al. [50] proposed efficient anycast mechanisms for 802.15.4-TiSCH networks, further advancing IoT communications reliability.

Rady et al. [51] examined heterogeneous slot durations in 6DYN, demonstrating improved scheduling flexibility and performance in diverse IoT deployments. Righetti et al. [52] evaluated autonomous and adaptive scheduling techniques, emphasizing their importance for IoT networks operating under variable traffic loads.

Energy efficiency strategies in Software-Defined Networking (SDN)-enabled IoT were discussed by Rout et al. [53], integrating

scheduling approaches into the SDN framework. Azimian et al. [54] presented cross-layer scheduling and routing techniques, improving end-to-end QoS.

Josbert et al. [55] focused on SDN-driven industrial networks, demonstrating how scheduling functions within the SDN architecture significantly enhance IoT operational efficiency. Orozco-Santos et al. [56] proposed TiSCH multiflow scheduling to guarantee QoS in critical industrial IoT applications.

Distributed channel-ranking scheduling was addressed by Amezcua Valdovinos et al. [57], improving the adaptability of channel allocation strategies. Jabandžić et al. [58] developed dynamic multichannel time division multiple access (TDMA) slot assignment algorithms, enhancing the robustness of 6TiSCH scheduling under varying channel conditions.

Tanaka et al. [59] designed a comprehensive scheduling function suite, systematically addressing diverse application requirements within 6TiSCH networks. Finally, Claeys et al. [60] assessed the Transport Layer Security handshake's performance in 6TiSCH networks, linking security considerations directly with scheduling performance.

Collectively, these studies represent substantial advancements in 6TiSCH scheduling algorithms, emphasizing adaptive, flexible, and efficient approaches tailored to meet the demanding communication and operational requirements of modern industrial and critical IoT applications.

2.3. Review on directional antennas

Directional antennas have become critical components in wireless communication, particularly in IoT and emerging network technologies, due to their capacity for improving energy efficiency, reducing interference, and optimizing spatial reuse. Recent literature demonstrates significant innovations across diverse aspects of directional antenna designs and applications.

Marco di Renzo et al. [61] explored reconfigurable intelligent surfaces, demonstrating their potential to dynamically optimize wireless environments, thereby significantly enhancing network reliability and efficiency. Rahman and Ryu [62] introduced an IoT sensor network leveraging electronically steerable parasitic array radiator antennas, significantly reducing energy consumption through dynamic beam steering.

Arnaoutoglou et al. [63] developed a miniature, all-polarization antenna optimized for beamforming and direction-of-arrival estimation, facilitating accurate localization in compact IoT devices. Pourahmadazar et al. [64] focused on novel planar IoT antenna developments, showcasing compact, multidirectional radiation patterns optimized for IoT integration. Bhakhar and Singh Chhillar [65] proposed dynamic multi-criteria scheduling for directional antenna-based IoT networks, optimizing throughput, latency, and efficiency.

Chu and Chun [66] developed SNR threshold scheduling methods to optimize IoT uplink network performance. Bang et al. [67] explored the secrecy sum-rate of directional antenna-equipped IoT networks, highlighting security benefits derived from directional communication techniques. B R and Manjanaik [68] introduced decentralized large antenna-array scheduling solutions using hierarchical consensus methods, enabling scalability in massive IoT networks.

Rohit et al. [69] introduced graph-based aggregation and attention mechanisms optimized for directional antenna deployment, significantly enhancing IoT network performance. Chu et al. [70] presented joint active and passive beamforming strategies to enhance data rates and energy efficiency. Zhang et al. [71] proposed MASSnet, a deep-learning-based multiple-antenna selection approach optimized for IoT performance.

Yahya et al. [72] developed dual-band GPS/LoRa antennas specifically tailored for IoT deployments, improving dual-mode IoT device communication efficiency. Giordani et al. [73] reviewed directional antenna applications and future technologies toward 6G networks, emphasizing beamforming and smart antenna deployment. Gil-Martínez et al. [74] introduced fast frequency scanning metasurface antennas, significantly improving spectrum agility and beam-steering efficiency.

Bhardwaj et al. [75] presented printed monopole antennas optimized for next-generation IoT applications, highlighting compact form factors and enhanced directionality. Dwivedi and Prasad [76] designed security enhancement scheduling models for IoT networks with directional antennas, emphasizing privacy and secure communication.

Liu et al. [77] proposed optimal scheduling methods for integrated IoT-Fog-Cloud systems, ensuring low latency and reliable directional communication. Hazra et al. [78] developed cooperative transmission scheduling and computation offloading techniques for directional antenna-equipped IoT networks, optimizing computational efficiency and latency reduction.

Goudarzi et al. [79] focused on scheduling IoT applications in edge and fog computing environments, leveraging directional antennas for efficient resource allocation and reduced interference. Hussain et al. [80] designed compact, sub-GHz tunable antennas optimized for frequency agility in IoT networks, enhancing network adaptability and spectral efficiency.

Yassine et al. [81] introduced a four-sided matching game model for energy-efficient directional antenna scheduling, maximizing performance in energy-constrained IoT networks. Achar [82] presented Neural-Hill, an innovative algorithm for efficient directional antenna scheduling, emphasizing neural network-driven optimization strategies.

Faenzi et al. [83] introduced methods for designing dual-polarized metasurface antennas, enhancing polarization flexibility and communication performance in IoT scenarios. Bodehou et al. [84] developed direct numerical inversion techniques for efficient directional antenna design, ensuring high-performance beam steering.

Finally, Martínez Rosabal et al. [85] examined methods for minimizing worst-case energy consumption in directional antenna-based IoT networks, emphasizing robust and energy-conscious antenna design and network operation.

Collectively, these references reflect the expansive developments in directional antenna technology, emphasizing adaptive beamforming, intelligent scheduling, security enhancement, energy efficiency, and optimized design strategies tailored to meet the diverse requirements of contemporary and future IoT deployments.

3. Research Gaps in IoT MAC Protocols and 6TiSCH Scheduling

Despite advancements in MAC protocols for the IoT and the development of 6TiSCH scheduling algorithms, several research gaps persist:

1) **Energy Efficiency:** Balancing energy conservation with performance remains challenging, especially in heterogeneous IoT environments with devices having varying energy constraints and communication requirements.
2) **Scalability:** Many protocols struggle to accommodate the massive number of devices anticipated in future IoT deployments, leading to increased collisions and reduced throughput.

3) **Quality of Service (QoS):** Ensuring consistent QoS across diverse IoT applications is difficult, particularly with varying data rates, latency requirements, and reliability standards.
4) **Security:** Integrating robust security measures into MAC protocols without significantly impacting performance or energy efficiency remains an ongoing challenge, given the resource constraints of many IoT devices.
5) **Mobility Support:** Current MAC protocols often lack effective mechanisms to handle device mobility, leading to increased packet loss and communication delays in dynamic IoT environments.
6) **Interoperability:** Achieving seamless communication among diverse devices and networks with different MAC protocols is essential for widespread IoT adoption but remains a significant hurdle.
7) **Standardization:** The absence of universally accepted standards for IoT MAC protocols hampers compatibility and integration across various platforms and applications.
8) **Dynamic Topologies and Traffic Patterns:** In 6TiSCH networks, centralized scheduling approaches require prior knowledge of network topology and traffic, leading to slow adaptation in dynamic environments with sporadic traffic. Distributed methods offer better adaptability but may not achieve optimal scheduling due to limited local information.
9) **Collision Avoidance in Distributed Scheduling:** Algorithms like On-the-Fly (OTF) dynamically allocate bandwidth based on local information, which can result in collisions due to unawareness of other nodes' schedules.
10) **Latency in Hash-Based Scheduling:** Hash-based scheduling methods classify node traffic and determine time slots via hash values, potentially leading to high latency despite low communication overhead.
11) **Energy Consumption in Dense Networks:** Protocols like the Decentralized Broadcast Scheduling Algorithm reduce collisions by sharing local schedules, but in dense networks, this leads to increased energy consumption.
12) **Cross-Layer Optimization:** There is a lack of integrated approaches that consider interactions between scheduling at the MAC layer and routing decisions at the network layer, which is crucial for overall network performance.

Addressing these gaps is crucial for the development of efficient, reliable, and secure IoT systems.

4. System Model

4.1. Antenna model

In this work, a switched beam antenna is used, as it supports a fixed and highly directive beam for data transmission. The beam width θ is set to 90 ° to point in four directions for simplicity; however it can be changed to M directions. An IoT node switches from one beam to another visiting all the beams is defined as sweeping. Neighbor node position is evaluated based on the direction of arrival. All the nodes in the network are equipped with directional antennas. Thus, the proposed scheduling protocol can achieve reduced node energy consumption by maximizing the concurrent transmissions with minimal interference. It is noteworthy that each and every IoT node will maintain a cell-allocation matrix (to keep track of cell information) and a directional antenna beam matrix.

Table 1
Notations

Symbol	Meaning
N	number of nodes in the network
n_i	i^{th} node in the network
V	$V = n_0, n_1, ...n_N$ are the sensor nodes with n_o as the root node
R_i	radius of communication
$D_{x,y}$	Direction of the node

IoT nodes (sender) start scheduling their one-hop neighbor nodes based on local information (cell availability) and broadcast their schedule information to local neighbors. Neighbor nodes that receive schedule information from the sender will update their cell-allocation matrix and directional beam matrix. With this, nodes that are in the communication range of the sender will know about the antenna beam that is going to be used for directional transmission.

In current WSN hardware, each node is equipped with a half-duplex transceiver. This leads to two categories of conflicts: (i) primary conflict, which occurs when a node attempts to transmit and receive simultaneously, and (ii) secondary conflict, which occurs when a node receives multiple transmissions [86].

For secondary conflict, let us assume that the sink location is fixed and sensor nodes are deployed within the IoT network. Once the sensor nodes are battery powered, how exactly synchronization happens among the one-hop neighbor nodes is a challenging task. To achieve this, nodes that are switched ON will listen in all directions to receive the scheduling update from the one-hop neighbor nodes. Later, data transmission will be broadcast with the directional antenna toward the direction of the sink.

4.2. Communication and computation delays

In the proposed model, the minimum rate of upload between two nodes i and j is given by $ru_{i,j}$. The maximum delay at any given node is defined as

$$D^u = max\left(\frac{|B_i|}{ru_{i,j}} + \zeta_i^u\right) \forall i \in V \tag{1}$$

where $|B_i|$ is the total number of bits to be transmitted in up-link and down-link at a given node and ζ_i^u is the channel access time. Similarly, the minimum rate of download between two nodes j and j is given by $rd_{j,i}$. The maximum delay at any given node is defined as

$$D^d = max\left(\frac{|B_i|}{rd_{i,j}} + \zeta_i^d\right) \forall i \in V \tag{2}$$

The computation time per iteration at a node depends on the size of the learning model, the CPU cycles to execute one unit of data is denoted by χ_i, and the size of dataset S_i. The number of CPU cycles needed to execute is $(\chi_i.S_i)$, given all the data.

4.3. Directional energy consumption

The energy consumption at node i is a function of channel state, directional transmission rate, and the bandwidth. The wireless channel between the nodes i and j is given by signal-to-noise ratio (SNR) γ_{ij} defined as

$$\gamma_{ij} = \frac{P_{ij}^r.|hij|^2}{N_0.W_{ij}}, \tag{3}$$

where P_{ij}^r is the received power at i, $|hij|$ is the channel fading, N_0 is spectral density, and W_{ij} is the bandwidth. Also, the path loss for distance of d_{ij} is α $(2 \leq \alpha \leq 6)$. Thus, received power is

attenuated with respect to transmission as follows $P^r_{ij} = P^t_{ij}.\omega.d^{-\alpha}_{ij}$. The transmission rate from node i to j given SNR is defined as

$$ru_{i,j} = W_{ij}\log_2(1 + \upsilon\gamma_{ij}) \tag{4}$$

where $\upsilon = -1.5/\log(5.BER)$ BER is the bit error rate; the transmitted power can be written as

$$P^t_{ij} = \frac{N_0.W_{ij}}{g_{ij}}\left(2^{\frac{r_{ij}}{W_{ij}}} - 1\right) \tag{5}$$

where g_{ij} is the channel gain that is defined as

$$g_{ij} = \upsilon.\omega.d^{-\alpha}_{ij}.|h_{ij}|^2 \tag{6}$$

The transmission energy consumed at node i to send data of length B_i to node j is

$$E_{ij} = \frac{P^t_{ij}.|B_i|}{rij} \tag{7}$$

The validation uses the fixed-power transmission-energy proxy $E_{\mathrm{TX}} = 0.0522 \sum_i t_{\mathrm{TX},i}$ joules, with transmit time in seconds. This proxy includes recorded radio transmissions but excludes RX, idle-listen, and platform energy; adaptive power control is not implemented.

4.4. Design objectives

Minimal Schedule Length: The primary design objective is to make use of concurrent transmissions, increasing the spatial reuse by minimizing the interference to reduce the schedule length.


Minimizing Energy Consumption: Two popular techniques for maximizing the network lifetime in resource-constrained WSN are (i) transmission power control and (ii) radio activity. Nodes can transmit with optimal power instead of maximum power, and instead of keeping the radio active all the time, intelligent scheduling between sleep and active states is archieed using duty cycles.

4.5. Network model

In TiSCH, enhanced beacons (EBs) are broadcast by the coordinator for network formation. Then, interested nodes scan for the EB messages and reply with EB message to show their presence. In this model, we consider a 6TiSCH network with tree topology built using the Routing Protocol for Low-Power and Lossy Network. We consider a time-slotted IEEE 802.15.4-2015 network, where the nodes operate in a distributed manner. The network can be defined as $G = (V, E)$, where $V = n_0, n_1, ...n_N$ is the set of nodes in the network. Here, n_0 is the sink, E denotes the link between the nodes, R_i denotes the communication radius, and $D_{x,y}$ denotes the direction of the node (see in Table 1). Sensor nodes monitor various events and forward them to the sink node. In the proposed work, the antenna works in directional mode for data transmission and omnidirectional mode for schedule-control discovery; data reception follows the configured radio-medium model. **Node directional matrix** avoids interference from neighbor nodes accessing the same channel. Every node knows its own location. By the exchange of local information, the node calculates the antenna direction and index number of neighbor nodes using the global position system (GPS), as shown in Figure 2.

Directional interference in a channel is avoided through modified Request To Send (RTS) and Clear To Send (CTS) messages, which include index of antenna and angle of arrival information. Due to this, directional data transfer with efficient transmit power is archived.

Figure 2
Directional antenna discovery for neighbor node

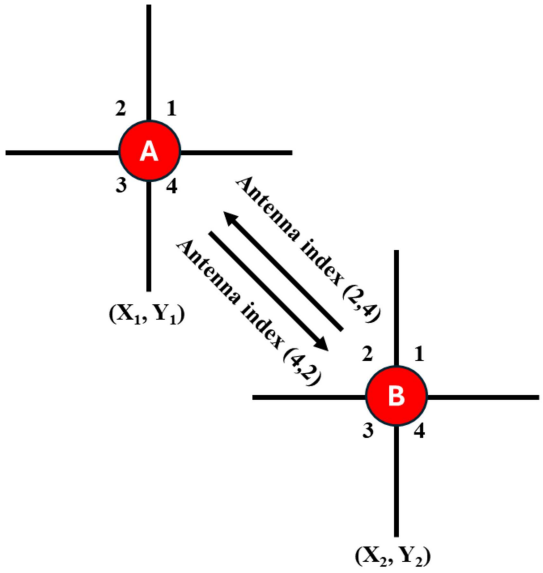

Node Channel Matrix

The primary objective of the node channel matrix is to avoid collisions and reduce power consumption.

$$M = \begin{bmatrix} V^{[K]}_{[1,1]} & \cdots & V^{[K]}_{[1,C^{[1]}]} \\ \vdots & \ddots & \vdots \\ V^{[K]}_{[K,1]} & \cdots & V^{[K]}_{[K,C^{[K]}]} \end{bmatrix} \tag{8}$$

Node Directional Matrix


We design a node directional matrix (9) containing $D_{x,y}$ to avoid interference with neighbor directional data transmission on the same channel.

$$M = \begin{bmatrix} D_{1,2} & \cdots & D_{1,K} \\ \vdots & \ddots & \vdots \\ D_{K,1} & \cdots & D_{K,K-1} \end{bmatrix} \tag{9}$$

4.6. Directional transmission

In the above scenario (Figure 3), we assume four nodes A, B, C, and D using one channel trying to have communication with each other. Node A wants to communicate with node B, while node C also wants to communicate with node D. Node pair (A,B) is in need of four time slots and is scheduled to transmit in channel

Figure 3
Omnidirectional TiSCH transmission from node A to node B; node C and node D are in waiting state

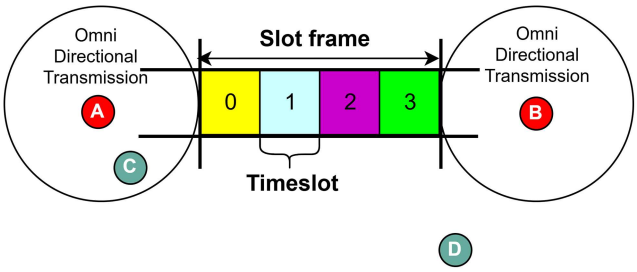

1's four time slots to start its omnidirectional transmission, while node pair (C,D) must wait for next cycle for transmission. Omnidirectional transmission prevents surrounding nodes that are in its interference range from transmitting. With the use of directional transmission (see Figure 4), Node C, which is intending to transmit in the other direction, is allowed to start its transmission. Thus, in directional transmission nodes, both the node pairs can access the channel simultaneously, increasing the spatial reuse and reducing the waiting time.

4.7. Node scheduling

The data delivery rate is constrained by the rate at which the sink can accept the data. High priority is given to one-hop neighbors as they are busy all the time. The scheduling of one-hop neighbors is adjusted based on the packet arrival rates. A top-subtree TS(r) is defined as one whose root r is a child of the sink, and it is said to be eligible if r has at least one packet to send. Any given node has to identify the slots through which it can send information and the slot from which it can receive information; for the selected time slot, the node needs to decide a channel offset. Nodes around the sink are prioritized based on the min buffer size and high available bandwidth. Nodes for which the sink is in the directional transmission range have two modes of operation.

5. The Proposed MAC Model

Hybrid MAC with synchronous TDMA-CSMA/CA is designed to schedule the sensor nodes for directional data transmission.

5.1. Synchronous scheduling

Our proposed model in Figure 5 is based on a tree topology consisting of one parent node and multiple child nodes, as shown in Figure 6. The protocol includes two periods: synchronous scheduling and scheduled data transfer. Our main idea is to schedule nodes based on the timer value, which is calculated based on the number of packets remaining (buffer size). Many-to-one communication employed in sensor nodes suffers from a congestion problem called the funneling effect. So, one of the primary objectives is to keep the sink node busy. The synchronous scheduling period is divided into three TDMA slots $0, 1, 2$ of equal length. In slot 0, nodes at level 1 are scheduled to start the timer. In the Figure 5, node $n2$ timer expires first; hence, it sends RTS to the root node $n0$. Next, $n0$ broadcasts CTS to its neighbor nodes $n1, n2, n3$. Upon receiving CTS from the root node $n0$, $n2$ sends a NAV signal to its child nodes, indicating that it is in sending mode. Next, node $n1$ timer expires; it has listened to the CTS for $n2$ node from $n0$, so it changes its mode to receiving mode and broadcasts to its neighbors its availability. Similarly, node $n3$ changes to receiving mode and informs its availability to its child nodes. As the slot 1 begins, all the nodes level 2 will start their timer; $n4$ timer expires first, and it sends RTS to $n1$ node, which is in receiving mode. Node $n1$ sends CTS to all its child nodes, $n4, n5$, and upon receiving the CTS, $n5$ understands $n1$ is busy and changes its mode to receiving mode. Similarly, the procedure is followed for all the remaining nodes till all the possible links are scheduled.

5.2. Single channel omnidirectional case

In this scenario, as shown in Figure 7, nodes $n0, n1, n2, n3$ are in the interference range of one another, and they are operating with omnidirectional antennas with one available channel. Thus, when node $n2$ is transmitting on channel 1 and time slot 0, neighbor nodes $n1, n3$ need to be silent in time slot 0. Transmissions between n4−>n1 and n10−>n3 need to be scheduled in different time slots, in order to prevent interference with node $n2$.

5.3. Single channel directional case

With the use of directional transmission, as shown in Figure 8, nodes that are in interference range of each other, that is, $n0, n1, n2, n3$, can be scheduled to operate in a single channel, in different directions. Transmission between $n2- > n0$ uses (1,3) beam to communicate, $n4- > n1$ uses (1,3) and $n10- > n3$ uses (2,4) beams, respectively. All three transmissions are scheduled on channel 0, time slot 0 simultaneously. Thus, spatial reuse is achieved, thereby potentially improving throughput and reducing delay and energy consumption. Hence, the proposed model aims to reduce

Figure 4
Directional TiSCH transmission from node A to node B and node C to node D

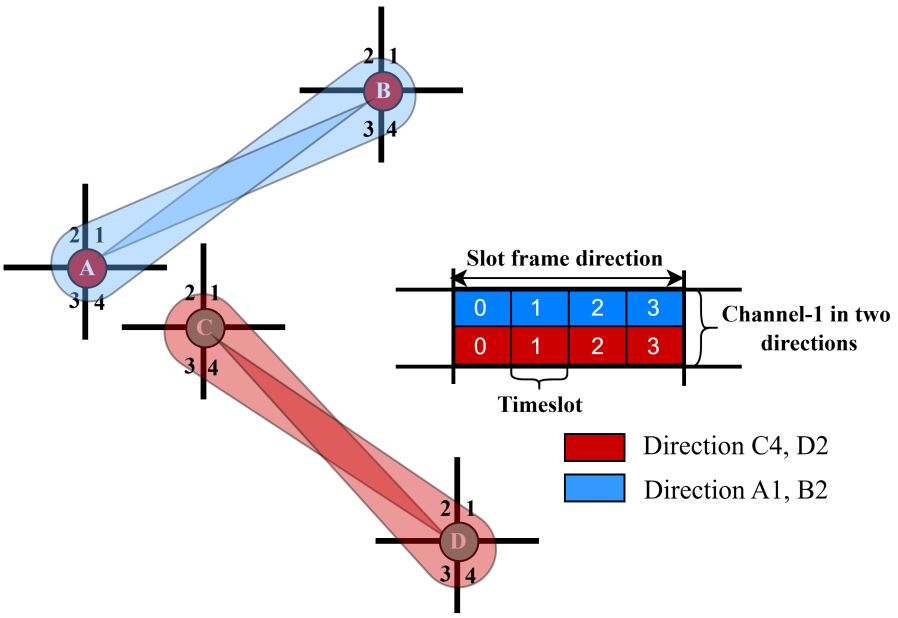


Figure 5
Level-based scheduling


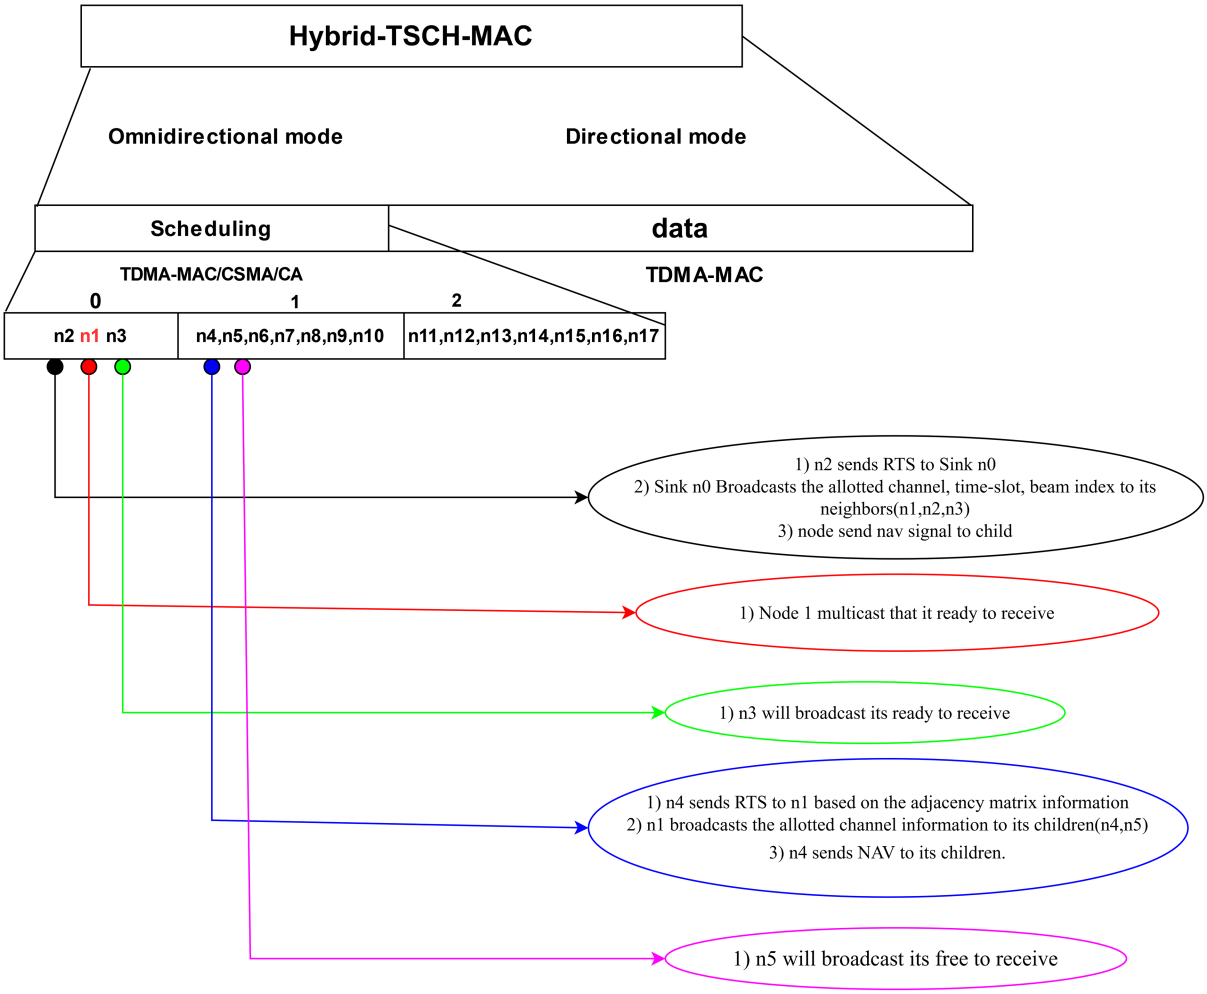


Figure 6
Top subtrees with varying loads (illustrative topology)

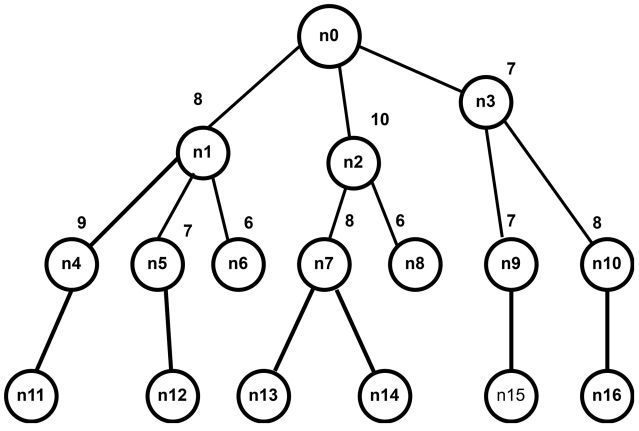

schedule length and transmission energy consumption, as can be seen in Figure 5.

Algorithm 1 Distributed Scheduling

Require: Every node knows its level in the tree and is fed with timer values when it needs to start its timers.

1. Nodes start their timer when the scheduling slot for their level begins.
2. Initially, one-hop neighbors from the sink start a timer (based on the number of packets remaining).
3. Node whose timer expires is assigned a slot-channel pair (toward sink) in the schedule and is updated in the schedule.
4. Parent node shares the scheduled link information with the child node (i.e., sink will broadcast the scheduled link information to node 1 and node 3.
5. When n1 timer expires, node 1 will broadcast to its child nodes and, similarly, node 3.
6. All the nodes update the information in their adjacency tables.
7. At the beginning of the second time slot, all two-hop neighbors start their timers.
8. Node 4 will check its adjacency table and send a request to n1, which is in receiving mode. n1 will multicast confirmation request. n5 and n6 will update their table.
9. Nodes not violating the adjacency constraint can be scheduled in parallel.
10. Child nodes reserve links based on the information received from the parent node.

6. Simulation Setup

For simulations, we use Contiki-NG firmware executed in Cooja. The 16-node reference load sweep uses RPL/TSCH/

Figure 7
Single channel omnidirectional scheduling


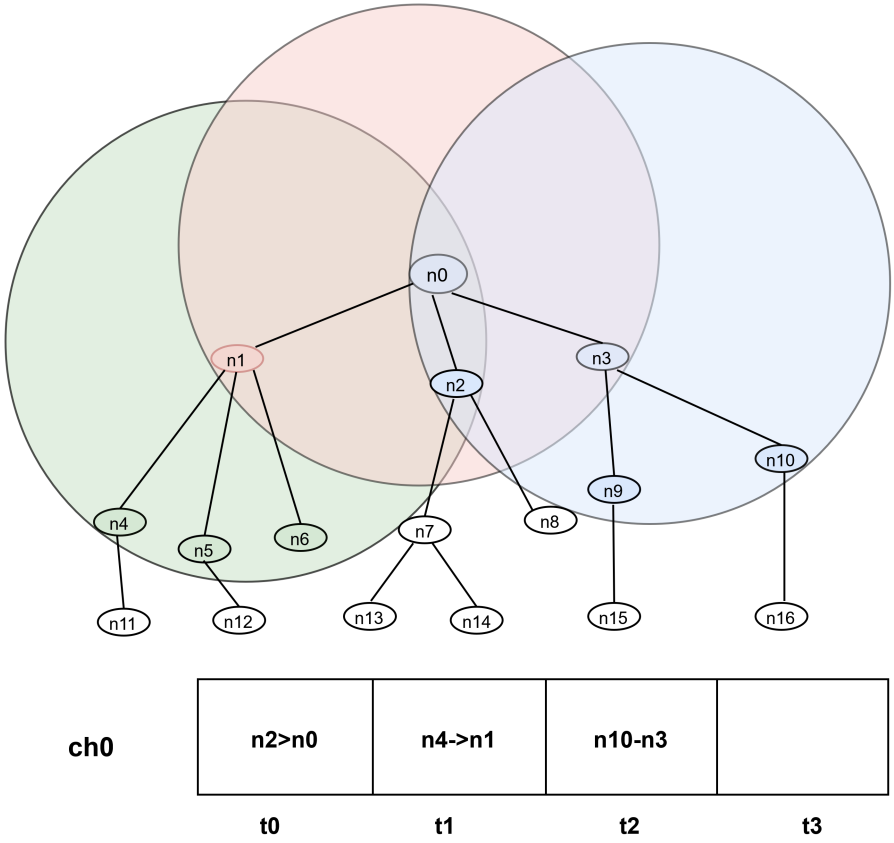


Figure 8
Single channel directional scheduling

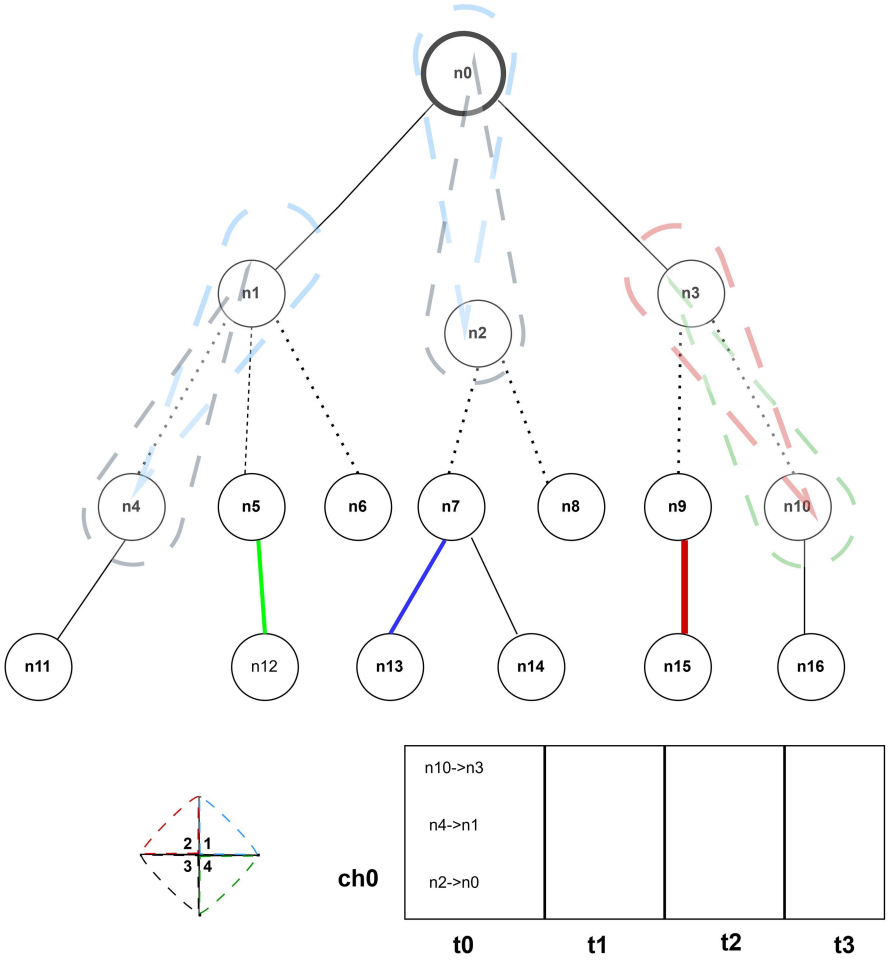

Orchestra with DGRM; the 32-, 48-, and 64-node mesh validation uses the paper scheduler with a custom Java directional-beam medium. Mesh traffic uses fixed peer links rather than sink collection. Node positions are fixed within a 1000 × 1000 m area. The custom medium uses deterministic log-distance propagation and SINR/capture rules, without random Rayleigh fading. Directional and omnidirectional configurations are compared. Parameters for the simulation are shown in Table 2.

Table 2
Parameters used in simulation

Parameters	Value
Area	1000 × 1000 m
Number of Nodes	16 (reference sweep); 32, 48 and 64 (mesh validation)
Transmission Power	Custom-medium reference received power: –40 dBm at 1 m. Fixed TX-power assumption for energy accounting: 52.2 mW.
Receiving Threshold	–95 dBm sensitivity in the custom beam medium
Sensing Threshold	–95 dBm (Cooja driver CCA threshold)
Data Rate	250 kbps (Cooja default); offered traffic is controlled by application send intervals
Packet Size	Variable-length formatted UDP payload. The plotted throughput index uses a 127-byte equivalent.
Simulation Time	5 min
Simulation Platform	Contiki-NG/Cooja; Orchestra/DGRM for the reference sweep; paper scheduler/custom beam medium for mesh validation
Beam Widths	Omnidirectional, 180°, 90° and 45°
Reference Offered Rates	0.5, 1, 1.875, 3.75 and 7.5 packets/s; 180° has two measured endpoints
Mesh Load Labels	12 and 16, using nominal 100-ms and 75-ms packet intervals; labels are not literal Mbps
Random Seeds	12345 for the load sweep; 1, 2, 7, 999 and 12345 for each five-seed validation group
Statistical Reporting	95% t-intervals on paired per-seed effects; n = 5 for the headline validation groups
Beam-Medium Settings	Path-loss exponent 2; noise –100 dBm; capture threshold 4 dB; sidelobes –25 dB; beam margin 5°; 600-m neighbor prefilter

The throughput index in Figure 9 is $\lambda \mathrm{PDR}(127 \times 8)/1000$ in nominal Kbit/s, where λ is aggregate offered packets/s; it is not byte-counted goodput. Figure 10 divides this index by radio duty in percentage points. Figure 11 plots received counts against $1/\lambda$. Application delay is the receive-minus-send ASN multiplied by 10 ms, for delivered packets only; pre-send queueing is excluded. Energy uses the last per-node snapshot, commonly 240 s, while packet counts cover the configured 300-s run. Five-seed 95% t-intervals use $\bar{x} \pm 2.776 s/\sqrt{5}$ on per-seed effects.

7. Result Analysis and Discussion

We have simulated IEEE 802.15e TiSCH with directional antennas [3]. A normalized throughput index, a duty-normalized throughput proxy, received-packet counts, and application delay are evaluated with increasing beam width in Figures 9, 10, 11, and 12.

In Figure 9, the normalized throughput index for directional configurations exceeds that of the omnidirectional configuration at several measured offered loads. The delay response is load-dependent, as shown in Figure 12. Figure 10 shows the

Figure 9
Throughput comparison of 6TiSCH with directional vs. omnidirectional antennas using the 127-byte-equivalent normalized throughput index (reference load sweep)

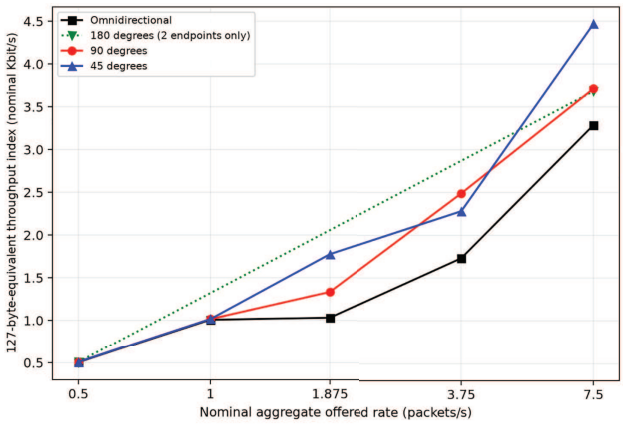


Figure 10
Energy-efficiency proxy—6TiSCH, directional (45°/90°/180°) vs. omnidirectional antennas, expressed as throughput index per radio-duty percentage point

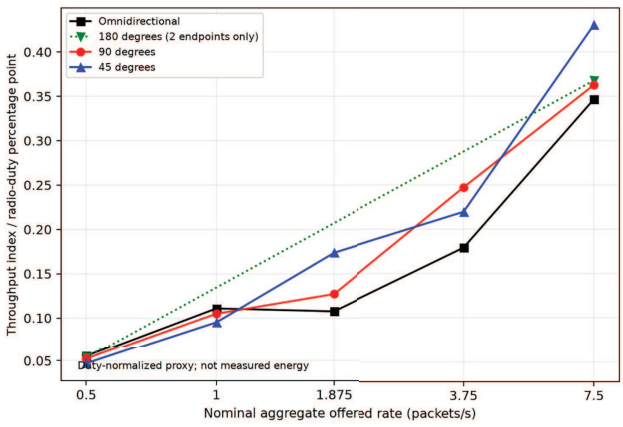


Figure 11
Packets received—6TiSCH, directional (45°/90°/180°) vs. omnidirectional antennas, against reciprocal aggregate offered rate 1/λ


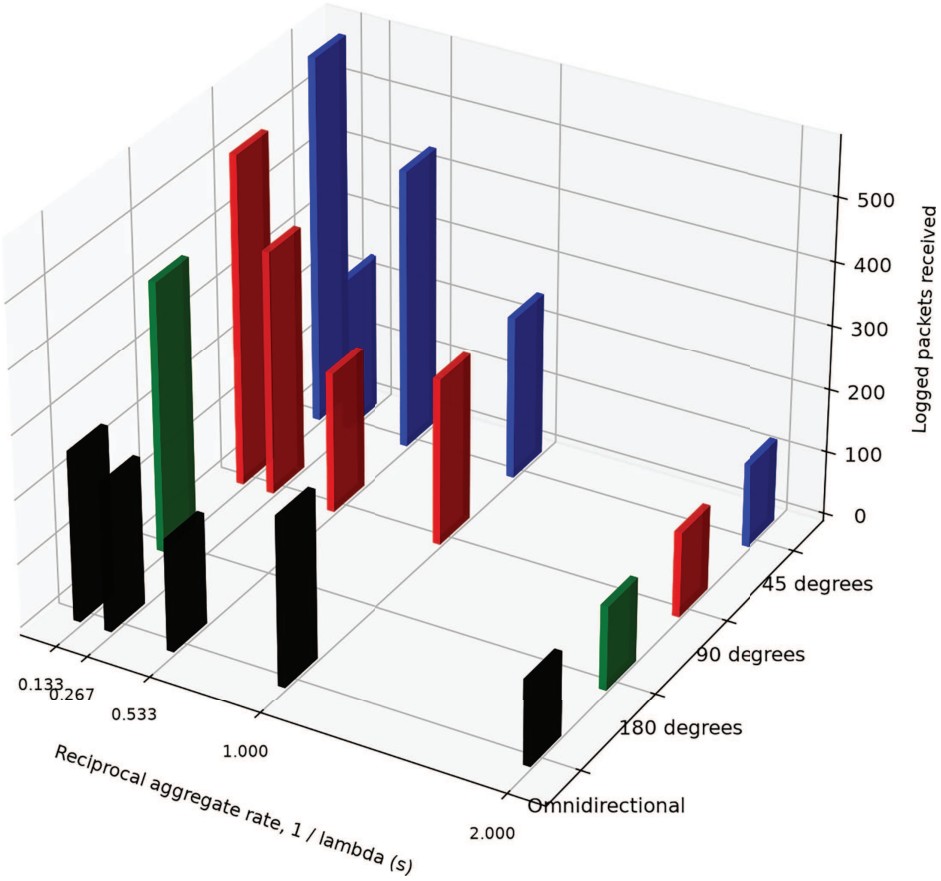


Figure 12
Application delay—6TiSCH, directional (45°/90°/180°) vs. omnidirectional antennas (reference load sweep)

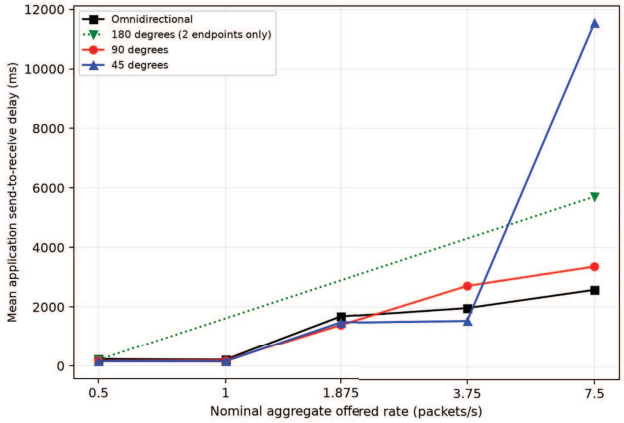

normalized throughput index per radio-duty percentage point, an energy-efficiency proxy rather than a total-energy measurement.

Figures 11 and 12 show received-packet counts and application delay, respectively. Directional configurations improve delivery at several offered loads, but delay benefits are not uniform.

In separate five-seed mesh configurations, the 64-node, load-12, 90° group gives a mean peer-delivery gain of 4.58 times (95% t-interval: 3.60–5.55), including 5.90 times for seed 7. The 32-node, load-16, 45° group gives a mean delay reduction of 48.8% (19.3–78.3%), and the 64-node, load-12, 45° group gives a mean fixed-power TX-only energy saving of 28.9% (17.3–40.5%). These effects occur at separate operating points. The TX-only saving does not represent total battery-energy saving.

While the proposed Directional Scheduling protocol shows promising results in enhancing the performance of constrained deterministic 6TiSCH-IoT networks, there are still areas that can be further improved. One drawback of the proposed algorithm is that it relies on directional transmissions, which may not be feasible in certain scenarios where nodes have uncertain or changing beam alignment. In addition, the mesh validation focuses on one-hop peer communication and does not establish multi-hop performance in larger IoT networks.

7.1. Practical implications of the study

We have clarified the practical implications of our research, which include:

1) **Scalability**: The proposed **Directional Scheduling protocol** enhances spatial reuse and reduces interference, suggesting potential use in large-scale IoT networks such as smart cities and industrial IoT applications.
2) **Energy Efficiency**: By leveraging directional antennas, our protocol can reduce transmission-only energy in the evaluated configurations, which may inform energy-aware scheduling for battery-powered IoT devices in applications like healthcare monitoring and environmental sensing.

3) **Improved Throughput**: Our protocol allows multiple nodes to transmit simultaneously, increasing throughput, which is crucial for high-data-rate applications like video surveillance and real-time industrial data transmission.
4) **Practical Applications**: The protocol is suitable for IoT deployments in areas like smart agriculture, industrial automation, and smart grids, where efficient use of bandwidth and low latency are key.

These implications underscore the value of our research in developing **scalable, energy-efficient, and high-performance IoT networks**.

7.2. Limitations

The proposed Directional Scheduling protocol provides configuration-dependent performance improvements in terms of throughput, delay, and energy consumption for 6TiSCH IoT networks. However, there are some limitations that need to be addressed for broader application:

1) Directional Antenna Limitations: While the use of directional antennas significantly reduces interference and enhances throughput, it assumes that nodes can accurately align their beams. In dynamic or mobile environments, this may lead to challenges in beam alignment, causing miscommunication or degraded performance.
2) Single-Hop Focus: The mesh configuration is evaluated primarily in single-hop communication scenarios. In multi-hop networks, additional considerations such as routing protocols and inter-hop coordination may introduce increased delays and collisions, which are not fully captured in this study.
3) Synchronization: Achieving perfect synchronization for all nodes in large-scale or heterogeneous IoT networks remains a challenge. Although we assumed synchronized nodes for the simulation, in real-world applications, especially with larger and more dynamic networks, achieving precise synchronization across nodes can be more difficult.

7.3. Future work

The proposed Directional Scheduling protocol shows promise in improving network performance for 6TiSCH IoT networks, but there are several avenues for future research:

1) **AI-Driven Scheduling:** Future work can explore the application of **AI** techniques, such as **reinforcement learning** or **deep Q-networks**, to dynamically optimize scheduling and resource allocation. AI can enable nodes to adapt to real-time network conditions, such as *traffic patterns, mobility*, and *channel quality*, to make intelligent scheduling decisions that improve throughput and reduce energy consumption.
2) **Blockchain Integration:** Another promising direction is the integration of **blockchain technology** for enhancing **resource allocation** and ensuring **security** in decentralized IoT networks. Blockchain can facilitate *trustless communication* between nodes, where nodes can securely share data and scheduling information without requiring centralized control. This approach could improve *transparency* and ensure that nodes follow agreed-upon protocols in a scalable manner.
3) **Hybrid Antenna Systems:** Exploring the combination of **directional** and **omnidirectional antennas** in hybrid systems could further enhance throughput and reduce the complexity of hardware while maintaining high network performance.
4) **Multi-Hop Validation:** Extend the mesh validation to dynamic multi-hop sink collection and routing changes, quantify pre-send queueing and loss-aware latency, and compare against contemporary scheduling functions under matched traffic and propagation settings.

Future research can explore the use of machine learning and AI techniques to optimize the scheduling and channel access at the MAC layer of IoT networks. AI can be used to learn from the network environment and make intelligent decisions on scheduling and resource allocation based on various factors such as network congestion, channel quality, and mobility patterns of the nodes. This can potentially improve the performance of IoT networks in various scenarios, including those with limited resources and mobility constraints.

Furthermore, future work can investigate the integration of the proposed Directional Scheduling protocol with other existing scheduling protocols, such as TDMA and Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA), to further improve the performance of IoT networks.

8. Conclusion

In this paper, we have proposed distributed scheduling for IEEE 802.15.4e networks in Time Slotted Channel Hopping (TSCH) MAC mode. The use of directional antennas can help reduce interference and delay while increasing spatial reuse and parallel transmissions, although the measured benefits depend on the network configuration and traffic load. The reported energy saving refers to a fixed-power transmission-only proxy and should not be interpreted as a total battery-energy reduction.

To address these limitations and further enhance the performance of IoT networks, future research could explore the use of AI and blockchain technologies. AI can be used to dynamically adjust the scheduling algorithm to account for changing network conditions, while blockchain could support secure and efficient communication between IoT devices. Additionally, future work could investigate the use of hybrid directional and omnidirectional antenna-based scheduling protocols to achieve higher throughput with lower hardware complexity.

Funding Support

This work is supported by Wenzhou-Kean University Internal (Faculty/Staff) Research Support Programs (IRSPC2023006).

Ethical Statement

This study does not contain any studies with human or animal subjects performed by any of the authors.

Conflicts of Interest

The authors declare that they have no conflicts of interest to this work.

Data Availability Statement

Data are available from the corresponding author upon reasonable request.

Author Contribution Statement

Anil Carie: Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration. **Abdur Rashid Sangi:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration, Funding acquisition. **Satish Anamalamudi:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration. **Murali Krishna Enduri:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration. **Baha Ihnaini:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration, Funding acquisition. **Hemn Barzan Abdalla:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization, Supervision, Project administration.

References

[1] Villordo-Jimenez, I., Torres-Cruz, N., Menchaca-Mendez, R., & Rivero-Angeles, M. E. (2022). A scalable and energy-efficient MAC protocol for linear sensor networks. *IEEE Access*, *10*, 36697–36710. https://doi.org/10.1109/ACCESS.2022.3163728

[2] Olatinwo, D. D., Abu-Mahfouz, A. M., Hancke, G. P., & Myburgh, H. C. (2023). Energy-efficient multichannel hybrid MAC protocol for IoT-enabled WBAN systems. *IEEE Sensors Journal*, *23*(22), 27967–27983.

[3] Portillo, C., Martinez-Bauset, J., Pla, V., & Casares-Giner, V. (2023). IoT WSN MAC protocol: Simulation analysis of minimum packets in queue nodes for medium access contention. In *2023 International Conference on Engineering and Emerging Technologies*, 1–6. https://doi.org/10.1109/ICEET60227.2023.10525788

[4] Rajab, H., Cinkler, T., & Bouguera, T. (2021). IoT scheduling for higher throughput and lower transmission power. *Wireless Networks*, *27*, 1701–1714. https://doi.org/10.1007/s11276-020-02307- 1

[5] Kulcu, S., Gormus, S., & Jin, Y. (2021). Integration of steerable smart antennas to IETF 6TiSCH protocol for high reliability wireless IoT networks. *IEEE Access*, *9*, 147780–147790. https://doi.org/10.1109/ACCESS.2021.3125144

[6] Mahadik, S. S., Pawar, P. M., & Muthalagu, R. (2024). Heterogeneous IoT (HetIoT) security: Techniques, challenges and open issues. *Multimedia Tools and Applications*, *83*(12), 35371–35412. https://doi.org/10.1109/ACCESS.2022.3177268

[7] Tavallaie, O., Zandavi, S. M., Haddadi, H., & Zomaya, A. Y. (2023). GT-TSCH: Game-theoretic distributed TSCH scheduler for low-power IoT networks. In *2023 IEEE 43rd International Conference on Distributed Computing Systems*, 1–12. https://doi.org/10.1109/ICDCS57875.2023.00084

[8] Bommisetty, L., & Venkatesh, T. (2022). Contention-based proportional fairness (CBPF) transmission scheme for time slotted channel hopping networks. *IEEE Transactions on Industrial Informatics*, *19*(2), 1289–1300. https://doi.org/10.1109/TII.2022.3166205

[9] Liu, S., Wu, W., Fu, L., Qu, K., Ye, Q., Zhuang, W., & Shen, S. (2023). Millimeter wave full-duplex networks: MAC design and throughput optimization. In *2023 Biennial Symposium on Communications*, 112–118. https://doi.org/10.1109/BSC57238.2023.10201813

[10] Gherbi, C. (2021). Internet of Things and heterogeneous networks technologies: Concepts, challenges and perspectives. *Ingénierie des Systèmes d'Information*, *26*(4), 403–408. https://doi.org/10.18280/isi.260408

[11] Nauman, A., Qadri, Y. A., Amjad, M., Zikria, Y. B., Afzal, M. K., & Kim, S. W. (2020). Multimedia Internet of Things: A comprehensive survey. *IEEE Access*, *8*, 8202–8250. https://doi.org/10.1109/access.2020.2964280

[12] Parra, P. I., Montejo-Sánchez, S., Fraire, J. A., Souza, R. D., & Céspedes, S. (2023). Network size estimation for direct-to-satellite IoT. *IEEE Access*, *10*(7), 6111–6125. https://doi.org/10.1109/jiot.2022.3224678

[13] Nayak, N. K. S., & Bhattacharyya, B. (2023). MAC protocol based IoT network intrusion detection using improved efficient shuffle bidirectional coot channel attention network. *IEEE Access*, *11*, 77385–77402. https://doi.org/10.1109/access.2023.3299031

[14] Kim, J. W., Kim, J., & Lee, J. (2022). Cross-layer MAC/routing protocol for reliability improvement of the Internet of Things. *Sensors*, *22*(23), 9429. https://doi.org/10.3390/s22239429

[15] Radha, P. N. S., & Adline Jancy, Y. (2023). Cooperative optimization techniques in distributed mac protocols: A survey. *Emerald*, *20*(2), 285–307. https://doi.org/10.1108/ijpcc-07-2022-0256

[16] Amin, F., Abbasi, R., Khan, S., & Abid, M. A. (2022). An overview of medium access control and radio duty cycling protocols for internet of things. *Electronics*, *11*(23), 3873. https://doi.org/10.3390/electronics11233873

[17] Famitafreshi, G., Afaqui, M. S., & Melià-Seguí, J. (2021). A comprehensive review on energy harvesting integration in IoT systems from MAC layer perspective: Challenges and opportunities. *Sensors*, *21*(9), 3097. https://doi.org/10.3390/s21093097

[18] Afroz, F., & Braun, R. (2022). Empirical analysis of extended QX-MAC for IoT-based WSNS. *Electronics*, *11*(16), 2543. https://doi.org/10.3390/electronics11162543

[19] Nguyen, T. C., Le, H. C., Sarang, S., Drieberg, M., & Nguyen, T. H. T. (2022). Priority and traffic-aware contention-based medium access control scheme for multievent wireless sensor networks. *IEEE Access*, *10*, 87361–87373. https://doi.org/10.1109/access.2022.3199385

[20] Effah, E., Thiare, O., & Wyglinski, A. M. (2023). A tutorial on agricultural IoT: Fundamental concepts, architectures, routing, and optimization. *IoT*, *4*(3), 265–318. https://doi.org/10.3390/iot4030014

[21] Fernandez, L., Ruiz-de-Azua, J. A., Calveras, A., & Camps, A. (2021). On-demand satellite payload execution strategy for natural disasters monitoring using LoRa: Observation requirements and optimum medium access layer mechanisms. *Remote Sensing*, *13*(19), 4014. https://doi.org/10.3390/rs13194014

[22] Krishnan, R., Krishnan, R. S., Robinson, Y. H., Julie, E. G., Long, H. V., & Sangeetha, A. (2022). An intrusion detection and prevention protocol for internet of things based wireless

sensor networks. *Wireless Personal Communications*, *124*(4), 3461–3483. https://doi.org/10.1007/s11277-022-09521-4

[23] Khisa, S., & Moh, S. (2020). Medium access control protocols for the Internet of Things based on unmanned aerial vehicles: A comparative survey. *Sensors*, *20*(19), 5586. https://doi.org/10.3390/s20195586

[24] Imane Kerrakchou, Y. A. M. S., & Chadli, S. (2022). Modeling the impact of jamming attacks in the Internet of Things. *Institute of Advanced Engineering and Science*, *26*(2), 1206. https://doi.org/10.11591/ijeecs.v26.i2.pp1206-1215

[25] Ahmad, A., Ullah, A., Feng, C., Khan, M., Ashraf, S., & Adnan, M. (2020). Towards an improved energy efficient and end-to-end secure protocol for IoT healthcare applications. *Security and Communication Networks*, *2020*, 1–10. https://doi.org/10.1155/2020/8867792

[26] El Houssaini, M. A., Nabou, A., Hadir, A., El Houssaini, S., & El Kafi, J. (2023). A new predictive approach for the MAC layer misbehavior in IEEE 802.11 networks. *International Journal of Pervasive Computing and Communications*, *20*(2), 240–261. https://doi.org/10.1108/ijpcc-08-2022-0303

[27] Olatinwo, D. D., Abu-Mahfouz, A. M., & Hancke, G. P. (2021). Towards achieving efficient MAC protocols for WBAN-enabled IoT technology: A review. *EURASIP Journal on Wireless Communications and Networking*, *2021*(1), 60. https://doi.org/10.1186/s13638-021-01919-1

[28] Mahmud, M. T., Rahman, M. O., Alqahtani, S. A., & Hassan, M. M. (2021). Cooperation-based adaptive and reliable mac design for multichannel directional wireless IoT networks. *IEEE Access*, *9*, 97518–97538. https://doi.org/10.1109/access.2021.3093491

[29] Kim, D., Kwon, J. H., & Kim, E. J. (2020). TSCH multiple slotframe scheduling for ensuring timeliness in TS-SWIPT-enabled IoT networks. *Electronics*, *10*(1), 48. https://doi.org/10.3390/electronics10010048

[30] Ortigueira, R., Fraire, J. A., Becerra, A., Ferrer, T., & Céspedes, S. (2021). RESS-IoT: A scalable energy-efficient MAC protocol for direct-to-satellite IoT. *IEEE Access*, *9*, 164440–164453. https://doi.org/10.1109/access.2021.3134246

[31] Engmann, F., Adu-Manu, K. S., Abdulai, J. D., & Katsriku, F. A. (2021). Network performance metrics for energy efficient scheduling in wireless sensor networks (WSNs). *Wireless Communications and Mobile Computing*, *2021*(1), 9635958. https://doi.org/10.1155/2021/9635958

[32] Yang, Z., Li, L., Gu, F., Ling, X., & Hajiee, M. (2022). TADR-EAODV: A trust-aware dynamic routing algorithm based on extended AODV protocol for secure communications in wireless sensor networks. *Internet of Things*, *20*, 100627. https://doi.org/10.1016/j.iot.2022.100627

[33] Khisa, S., & Moh, S. (2021). Priority-Aware fast MAC protocol for UAV-assisted industrial IoT systems. *IEEE Access*, *9*, 57089–57106. https://doi.org/10.1109/access.2021.3072375

[34] Zhang, H., & Wang, F. (2022). MAC protocol analysis for wireless sensor networks. *Journal of Information Technology Research*, *15*(1), 1–12. https://doi.org/10.4018/jitr.298617

[35] Wu, C. M., Kao, Y. C., Chang, K. F., Tsai, C. T., & Hou, C. C. (2021). A Q-learning-based adaptive MAC protocol for Internet of Things networks. *IEEE Access*, *9*, 128905–128918. https://doi.org/10.1109/access.2021.3103718

[36] Rady, M., Lampin, Q., Barthel, D., & Watteyne, T. (2020). No free lunch—Characterizing the performance of 6TiSCH when using different physical layers. *Sensors*, *20*(17), 4989. https://doi.org/10.3390/s20174989

[37] Rady, M. (2021). g6TiSCH: Generalized 6TiSCH for agile multi-PHY wireless networking. *IEEE Access*, *9*, 84465–84479. https://doi.org/10.1109/access.2021.3085967

[38] Lee, J. H., & Chung, S. H. (2025). Adaptive cell scheduling and negotiation techniques for 6TiSCH networks under bursty traffic. *Sensors*, *25*(5), 1418. https://doi.org/10.3390/s25051418

[39] Chang, T., Vučinić, M., Guillén, X. V., Dujovne, D., & Watteyne, T. (2020). 6TiSCH minimal scheduling function: Performance evaluation. *Internet Technology Letters*, *3*(4), e170. https://doi.org/10.1002/itl2.170

[40] Ha, Y., & Chung, S. H. (2022). Traffic-aware 6TiSCH routing method for IIoT wireless networks. *IEEE Internet of Things Journal*, *9*(22), 22709–22722. https://doi.org/10.1109/jiot.2022.3184310

[41] Tanaka, Y., Minet, P., Vučinić, M., Vilajosana, X., & Watteyne, T. (2022). YSF: A 6TiSCH scheduling function minimizing latency of data gathering in IIoT. *IEEE Internet of Things Journal*, *9*(11), 8607–8615. https://doi.org/10.1109/jiot.2021.3118017

[42] Kotsiou, V., Papadopoulos, G. Z., Chatzimisios, P., & Theoleyre, F. (2020). LDSF: Low-latency distributed scheduling function for industrial Internet of Things. *IEEE Internet of Things Journal*, *7*(9), 8688–8699. https://doi.org/10.1109/jiot.2020.2995499

[43] Elsas, R., Van Leemput, D., Hoebeke, J., & De Poorter, E. (2023). Multi-modal industrial IoT networks: Recent advances and future challenges. *Wireless Personal Communications*, *140*(1–2), 1–24. https://doi.org/10.1007/s11277-023-10213-w

[44] Kumar, K., & Kolberg, M. (2023). DeSSR: A decentralized, broadcast-based scalable scheduling reservation protocol for 6TiSCH networks. *IEEE Internet of Things Journal*, *11*(7), 12728–12744. https://doi.org/10.1109/jiot.2023.3338289

[45] Fahad, M., Shojafar, M., Abbas, M., Ahmed, I., & Ijaz, H. (2022). A multi-queue priority-based task scheduling algorithm in fog computing environment. *Concurrency and Computation: Practice and Experience*, *34*(28), e7376. https://doi.org/10.1002/cpe.7376

[46] Pratama, Y. H., Chung, S. H., & Fawwaz, D. Z. (2024). Low-latency and q-learning-based distributed scheduling function for dynamic 6tisch networks. *IEEE Access*, *12*, 49694–49707. https://doi.org/10.1109/access.2024.3384869

[47] Righetti, F., Vallati, C., Rasla, D., & Anastasi, G. (2023). Investigating the CoAP congestion control strategies for 6TiSCH-based IoT networks. *IEEE Access*, *11*, 11054–11065. https://doi.org/10.1109/access.2023.3241327

[48] Pradhan, N. M., Chaudhari, B. S., & Zennaro, M. (2022). 6TiSCH low latency autonomous scheduling for Industrial Internet of Things. *IEEE Access*, *10*, 71566–71575. https://doi.org/10.1109/access.2022.3188862

[49] Nengroo, S. H., Jin, H., & Lee, S. (2022). Management of distributed renewable energy resources with the help of a wireless sensor network. *Applied Sciences*, *12*(14), 6908. https://doi.org/10.3390/app12146908

[50] Amiri, S., Nassiri, M., Mohammadi, R., & Theoleyre, F. (2023). An efficient anycast mechanism for 802.15. 4-TSCH to improve QoS in IIoT. *Journal of Sensors*, *2023*(1), 9910809. https://doi.org/10.1155/2023/9910809

[51] Rady, M., Lampin, Q., Barthel, D., & Watteyne, T. (2021). 6DYN: 6TiSCH with heterogeneous slot durations. *Sensors*, *21*(5), 1611. https://doi.org/10.3390/s21051611

[52] Righetti, F., Vallati, C., Gavioli, A., & Anastasi, G. (2021). Performance evaluation of adaptive autonomous scheduling functions for 6TiSCH networks. *IEEE Access*, *9*, 127576–127594. https://doi.org/10.1109/access.2021.3112266

[53] Rout, S., Sahoo, K. S., Patra, S. S., Sahoo, B., & Puthal, D. (2021). Energy efficiency in software defined networking: A survey. *SN Computer Science*, *2*(4), 308. https://doi.org/10.1007/s42979-021-00659-9

[54] Azimian, N., Mohammadi, R., & Nassiri, M. (2023). A cross-layer method for scheduling and routing real-time traffic flow in industrial IoT. *Journal of Telecommunications and Information Technology*, *3*, 54–61. https://doi.org/10.26636/jtit.2023.3.1362

[55] Josbert, N. N., Ping, W., Wei, M., & Li, Y. (2021). Industrial networks driven by SDN technology for dynamic fast resilience. *Information*, *12*(10), 420. https://doi.org/10.3390/info12100420

[56] Orozco-Santos, F., Sempere-Payá, V., Silvestre-Blanes, J., & Albero-Albero, T. (2021). TSCH multiflow scheduling with QoS guarantees: A comparison of SDN with common schedulers. *Applied Sciences*, *12*(1), 119. https://doi.org/10.3390/app12010119

[57] Amezcua, Valdovinos., I., Figueroa Millán, P. E., Pérez-Díaz, J. A., & Vargas-Rosales, C. (2021). Distributed channel ranking scheduling function for dense industrial 6TiSCH networks. *Sensors*, *21*(5), 1593. https://doi.org/10.3390/s21051593

[58] Jabandžić, I., Giannoulis, S., Mennes, R., De Figueiredo, F. A., Claeys, M., & Moerman, I. (2021). A dynamic distributed multi-channel TDMA slot management protocol for ad hoc networks. *IEEE Access*, *9*, 61864–61886. https://doi.org/10.1109/access.2021.3074594

[59] Tanaka, Y., Ito, T., & Teraoka, F. (2022). 6TiSCH scheduling function design suite founded on Contiki-NG. *Journal of Information Processing*, *30*, 669–678. https://doi.org/10.2197/ipsjjip.30.669

[60] Claeys, T., Vučinić, M., Watteyne, T., Rousseau, F., & Tourancheau, B. (2021). Performance of the transport layer security handshake over 6TiSCH. *Sensors*, *21*(6), 2192. https://doi.org/10.3390/s21062192

[61] Di Renzo, M., Zappone, A., Debbah, M., Alouini, M. S., Yuen, C., De Rosny, J., & Tretyakov, S. (2020). Smart radio environments empowered by reconfigurable intelligent surfaces: How it works, state of research, and the road ahead. *IEEE Journal on Selected Areas in Communications*, *38*(11), 2450–2525. https://doi.org/10.1109/jsac.2020.3007211

[62] Rahman, M. M., & Ryu, H. G. (2022). IoT sensor network using ESPAR antenna based on beam scanning method for direction finding. *Sensors*, *22*(19), 7341. https://doi.org/10.3390/s22197341

[63] Arnaoutoglou, D. G., Kyriakou, A. A. G., Kaifas, T. N., Sirakoulis, G. C., & Kyriacou, G. A. (2024). An all-polarization, beamforming, and DoA ready, Γ–Dipole antenna array. *IEEE Transactions on Antennas and Propagation*, *2*(3), 2323–2336. https://doi.org/10.1109/tap.2024.3355206

[64] Pourahmadazar, J., Virdee, B. S., & Denidni, T. A. (2024). Unveiling new IoT antenna developments: Planar multi-beam metasurface half-Maxwell fish-eye lens with wavelength etching. *Electronics*, *13*(11), 2035. https://doi.org/10.3390/electronics13112035

[65] Bhakhar, R., & Chhillar, R. S. (2024). Dynamic multi-criteria scheduling algorithm for smart home tasks in fog-cloud IoT systems. *Scientific Reports*, *14*(1), 1–37. https://doi.org/s41598-024-81055-0

[66] Chu, L., & Chun, Y. J. (2024). SNR threshold scheduling for IoT uplink network. *IEEE Internet of Things Journal*, *11*(14), 25124–25135. https://doi.org/10.1109/jiot.2024.339136

[67] Bang, I., Chae, S. H., & Jung, B. C. (2024). On the secrecy sum-rate of Internet of Things networks: Scheduling and power control. *Electronics*, *13*(11), 2074. https://doi.org/10.3390/electronics13112074

[68] Jyothi, B. R., & Naganaik, M. (2024). A decentralized HC-ADMM approach for large antenna arrays. *Institute of Advanced Engineering and Science*, *34*(2), 795. https://doi.org/10.11591/ijeecs.v34.i2.pp795-805

[69] Rohit, P., Datta, A., & Satyanarayana, M. (2024). Optimized graph sample and aggregate-attention network-based high gain meta surface antenna design for IoT application. *International Journal of Communication Systems*, *38*(5), e6043. https://doi.org/10.1002/dac.6043

[70] Chu, Z., Xiao, P., Mi, D., Yin, C., Hao, W., Liu, W., & Sodre, A. C. (2024). Jointly active and passive beamforming designs for IRS-empowered WPCN. *IEEE Internet of Things Journal*, *11*(7), 11579–11592. https://doi.org/10.1109/jiot.2023.3331737

[71] Zhang, L., Zheng, S., Qiu, K., Lou, C., & Yang, X. (2024). MASSnet: Deep learning-based multiple-antenna spectrum sensing for cognitive radio-enabled Internet of Things. *IEEE Internet of Things Journal*, *11*(8), 14435–14448. https://doi.org/10.1109/jiot.2023.3343699

[72] Yahya, M. S., Soeung, S., Chinda, F. E., Musa, U., & Yunusa, Z. (2024). Dual-band GPS/LoRa antenna for internet of thing applications. *Bulletin of Electrical Engineering and Informatics*, *13*(2), 986–995. https://doi.org/10.11591/eei.v13i2.6428

[73] Giordani, M., Polese, M., Mezzavilla, M., Rangan, S., & Zorzi, M. (2020). Toward 6G networks: Use cases and technologies. *IEEE Communications Magazine*, *58*(3), 55–61. https://doi.org/10.1109/mcom.001.1900411

[74] Gil-Martinez, A., Poveda-García, M., Cañete-Rebenaque, D., & Gómez-Tornero, J. L. (2023). Metasurface antenna for fast frequency scanning with application to conical direction finding. *IEEE Antennas and Wireless Propagation Letters*, *22*(7), 1632–1636. https://doi.org/10.1109/lawp.2023.3254433

[75] Bhardwaj, S., Malik, P. K., Islam, T., Gehlot, A., Das, S., & Asha, S. (2023). A printed monopole antenna for next generation internet of things: Narrow band internet of things (Nb-IoT). *Progress in Electromagnetics Research C*, *138*, 117–129. https://doi.org/10.2528/pierc23090202

[76] Dwivedi, A. K., & Prasad, S. K. (2024). Security enhancement scheduling model for IoT-based smart cities through machine learning method. *Advanced Control for Applications: Engineering and Industrial Systems*, *6*(4), e235. https://doi.org/10.1002/adc2.235

[77] Liu, Q., Kosarirad, H., Meisami, S., Alnowibet, K. A., & Hoshyar, A. N. (2023). An optimal scheduling method in IoT-fog-cloud network using combination of Aquila optimizer and African vultures optimization. *Processes*, *11*(4), 1162. https://doi.org/10.3390/pr11041162

[78] Hazra, A., Donta, P. K., Amgoth, T., & Dustdar, S. (2023). Cooperative transmission scheduling and computation offloading with collaboration of fog and cloud for industrial IoT applications. *IEEE Internet of Things Journal*, *10*(5), 3944–3953. https://doi.org/10.1109/jiot.2022.3150070

[79] Goudarzi, M., Palaniswami, M., & Buyya, R. (2022). Scheduling IoT applications in edge and fog computing environments: A taxonomy and future directions. *ACM Computing Surveys*, *55*(7), 1–41. https://doi.org/10.1145/3544836

[80] Hussain, R., Alhuwaimel, S. I., Algarni, A. M., Aljaloud, K., & Hussain, N. (2022). A compact sub-GHz wide tunable antenna design for IoT applications. *Electronics*, *11*(7), 1074. https://doi.org/10.3390/electronics11071074

[81] Yassine, F., El Helou, M., Lahoud, S., & Bazzi, O. (2023). A four-sided matching game for energy-efficient scheduling in narrowband-IoT networks. *IEEE Access*, *11*, 44482–44495. https://doi.org/10.1109/access.2023.3266443

[82] Achar, S. (2023). Neural-Hill: A novel algorithm for efficient scheduling IoT-cloud resource to maintain scalability. *IEEE Access*, *11*, 26502–26511. https://doi.org/10.1109/access.2023.3257425

[83] Faenzi, M., Graziuso, N., Martini, E., & Maci, S. (2022). Design methods for dual polarized metasurface antennas: Three simple approaches. *IEEE Antennas and Propagation Magazine*, *64*(4), 37–50. https://doi.org/10.1109/MAP.2022.3169344

[84] Bodehou, M., Al Khalifeh, K., Jha, S. N., & Craeye, C. (2022). Direct numerical inversion methods for the design of surface wave-based metasurface antennas: Fundamentals, realizations, and perspectives. *IEEE Antennas and Propagation Magazine*, *64*(4), 24–36. https://doi.org/10.1109/MAP.2022.3169344

[85] Rosabal, O. M., López, O. L. A., Pérez, D. E., Shehab, M., Hilleshein, H., & Alves, H. (2022). Minimization of the worst case average energy consumption in UAV-assisted IoT networks. *IEEE Internet of Things Journal*, *9*(17), 15827–15838. https://doi.org/10.1109/MAP.2022.3169344

[86] Nirapai, A., & Chantaraskul, S. (2014). Centralized control for dynamic channel allocation in IEEE 802.15. 4 based wireless sensor networks. *Engineering Journal*, *18*(4), 151–164. https://doi.org/10.1109/JIOT.2022.3150419

How to Cite: Carie, A., Sangi, A. R., Anamalamudi, S., Enduri, M. K., Ihnaini, B., & Abdalla, H. B. (2025). Directional Antenna Based Scheduling Protocol for IoT Networks. *Journal of Computational and Cognitive Engineering*. https://doi.org/10.47852/bonviewJCCE52024933