

## REVIEW



# Flexible Tactile Sensors for Enhancing Robotic Perception

Huiwen Ren<sup>1,3</sup> , Wangyang Li<sup>2</sup>, Yanan Ding<sup>1,3</sup>, Yuming Feng<sup>3,4</sup> , Hexin Li<sup>2</sup>, Jianyang Li<sup>3,4</sup>, Jia Zhang<sup>2</sup>, Haiying Xiao<sup>4</sup> , Jialu Li<sup>4</sup> , Shuai Wang<sup>5</sup>, Cong Huang<sup>2</sup> , Li Jiang<sup>2</sup> and PingAn Hu<sup>3,4,\*</sup>

<sup>1</sup>*School of Chemistry and Chemical Engineering, Harbin Institute of Technology, China*

<sup>2</sup>*School of Mechatronics Engineering, Harbin Institute of Technology, China*

<sup>3</sup>*Key Laboratory of Micro-systems and Micro-structures Manufacturing of Ministry of Education, Harbin Institute of Technology, China*

<sup>4</sup>*School of Materials Science and Engineering, Harbin Institute of Technology, China*

<sup>5</sup>*Key Laboratory of the Ministry of Education for Advanced Catalysis Materials, Zhejiang Normal University, China*

**Abstract:** As robotic technology advances towards autonomy and intelligence, tactile sensing systems have become a key technology for overcoming the bottleneck of environmental interaction. Unlike visual perception, which captures macroscopic information, tactile sensing provides precise mechanical feedback for robotic manipulation by real-time analysis of microscopic physical parameters such as contact force, material properties, and surface morphology. This is particularly important in application scenarios that require high precision in force control, such as minimally invasive surgery and precision assembly, where the sensitivity, multimodal perception capabilities, and environmental adaptability of tactile sensors directly determine the operational performance of the robotic system. However, traditional tactile sensors are limited by rigid structures, limited sensitivity, and a single perception modality, making it difficult to meet the demands of complex interactions. In recent years, breakthroughs in flexible electronic materials, biomimetic microstructure design, and multimodal sensing integration technologies have provided innovative opportunities for tactile sensing systems. This review provides a detailed overview of the key technological advancements in tactile sensors and their applications in robotic surfaces, analyzes the major challenges currently faced, and looks ahead to future development directions, particularly the potential in flexible materials and intelligent algorithms.

**Keywords:** tactile sensor, robot, pressure sensor, multifunctional sensing

## 1. Introduction

With the rapid development of robotic technology and automation systems, the demands for perception capabilities in robots for precise operation and complex task execution are continuously increasing [1–4].


As a core component of robotic perception systems, tactile sensing technology plays a crucial role in enhancing the autonomy, flexibility, and adaptability of robots in handling complex tasks [5–8]. By simulating human tactile functions, tactile sensors can not only be used for human health monitoring and motion detection but also have widespread applications in robotic surfaces for tactile perception, helping robots more accurately sense and respond to environmental information. This, in turn, greatly improves the intelligence level and work efficiency of robots in industries such as manufacturing, healthcare, and services [9–13].

However, existing traditional tactile sensor technologies still face many challenges. For example, many traditional sensors, due

to their rigid structures, struggle to adapt to complex flexible surfaces, leading to inaccurate force feedback [14, 15]. Moreover, there are significant differences in their ability to perceive various types of forces (such as normal force, shear force, and bending force), which limits their accuracy in multimodal applications [16–18]. Additionally, the limitations in sensitivity [19, 20] response speed [21, 22] and adaptability of traditional sensors restrict their potential for high-precision task [23, 24]. To overcome these limitations, significant progress has been made in the research of flexible materials and intelligent tactile sensors. In recent years, the emergence of new sensor materials such as ion-electronic sensors [25, 26] hydrogel sensors [27–29], and flexible electronic skins has greatly improved the sensitivity, response speed, and environmental adaptability of tactile sensors [30–33]. In particular, in the medical field, these innovative technologies enable robots to accurately perceive small changes in tissue hardness, providing more precise force feedback during surgery and preventing damage to surrounding tissues [34, 35]. In industrial automation, tactile sensors allow robots to achieve high-precision force control in precision assembly and manufacturing,

\*Corresponding author: PingAn Hu, Key Laboratory of Micro-systems and Micro-structures Manufacturing of Ministry of Education and School of Materials Science and Engineering, Harbin Institute of Technology, China. Email: hupa@hit.edu.cn

**Figure 1**  
The tactile sensor is applied to human body as health or motion monitoring and to robot tactile sense

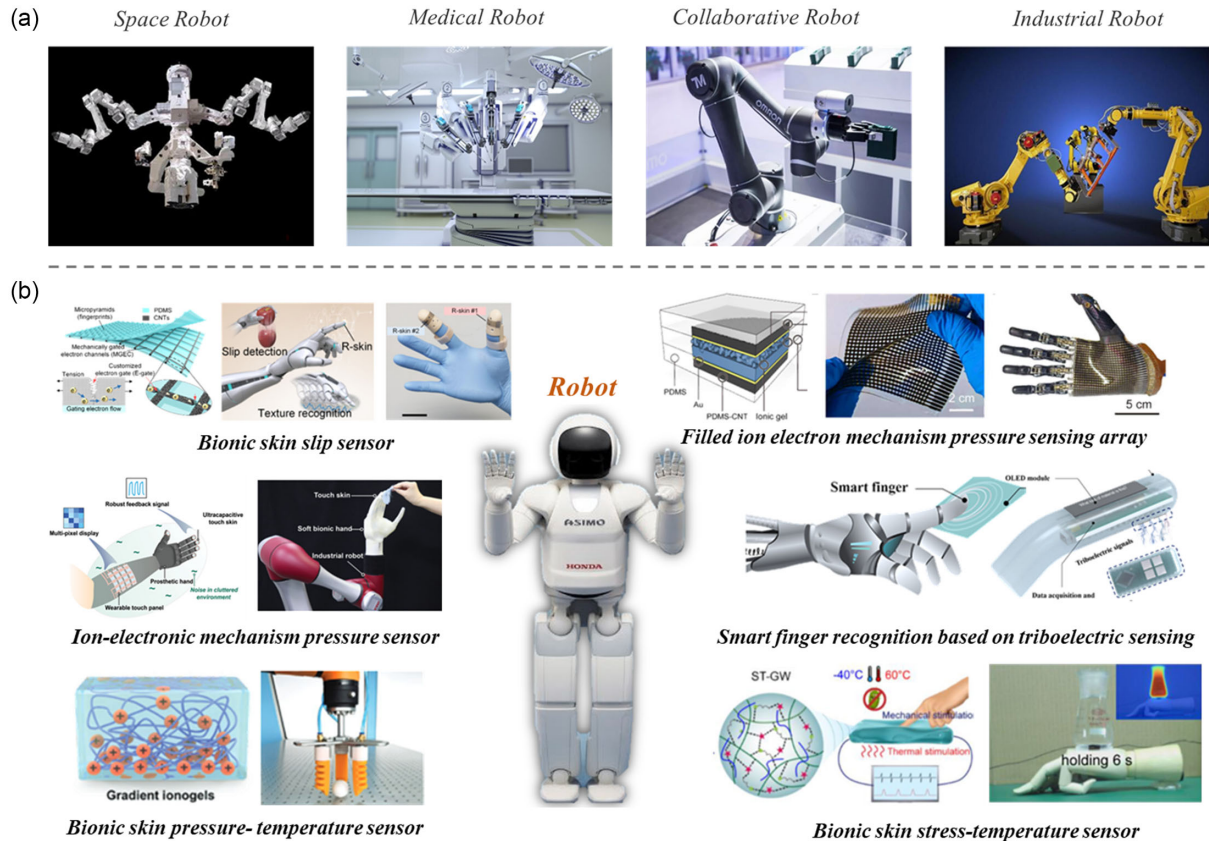

thereby improving production efficiency and product quality [36, 37] (Figure 1).

Nevertheless, existing tactile sensor technologies still face many pressing challenges, especially in areas such as sensor sensitivity, multimodal force perception fusion, and system integration [38–41]. Therefore, further research on tactile sensing systems remains a key area of robotic technology development. In the future, with the continuous advancement of flexible materials, sensing mechanisms, and intelligent algorithms, tactile sensors are expected to achieve even greater breakthroughs in precise sensing, flexible applications, and strong adaptability. This review will review the latest developments in tactile sensor technology, particularly sensor designs based on novel materials and structural optimization, analyze their application results and challenges in robotic perception systems, and provide a theoretical foundation and technical direction for the future research and development of tactile sensing technology through a systematic analysis of existing technologies.

## 2. Pressure Sensing Mechanism and Structural Design

Pressure sensors, as a key research focus in the field of tactile sensing, have developed a variety of technological solutions, including resistive, capacitive, and triboelectric types [42–45]. Tactile sensors can convert externally applied pressure into electrical signals, and by analyzing the changes in these signals, they can determine the magnitude and/or direction of the pressure. Each conversion mechanism has unique characteristics depending on the materials and structures used [46–48]. Next, we will provide a brief overview of the basic structure, common materials, and operating principles of these sensors.

### 2.1. Resistive tactile sensors

Resistive tactile sensors operate based on the principle of resistance change caused by pressure. When external pressure is applied to the sensor, the contact area between the conductive material in the electrodes increases, leading to a decrease in resistance [44, 49, 50]. Common conductive materials include carbon nanotubes [51–53] and silver nanowires [54, 55], while flexible materials such as PDMS [56, 57] or fibers [47, 58, 59] are typically used as substrates. Chen et al. combined carbon nanotubes with fabric to create a high-temperature-resistant pressure sensor, demonstrating excellent thermal stability, good pressure response, and cycle stability [53]. Jia et al. used MXene nanosheets with accordion-like nanostructures and protruding structures transferred from sandpaper, detecting resistance changes based on the interlayer contact area variation during the pressure loading process. Resistive sensors offer good cost-effectiveness and are suitable for simple tactile sensing, but they have limitations in terms of high precision and fast response [60].

### 2.2. Capacitive tactile sensors

Capacitive tactile sensors detect external pressure by causing changes in the geometric structure of the electrodes, which in turn affects the capacitance value, establishing a relationship between pressure and capacitance [61–63]. Common electrode materials include metallic nanowires [64–66] and graphene [67–69], while dielectric layers are typically made from flexible materials such as PDMS and polyurethane [70–72]. Lv et al. [73] developed an MWCNT/PDMS dielectric layer with spontaneous wrinkling

characteristics, exhibiting ultra-high linearity in capacitive sensing, making it capable of detecting weak signals and successfully integrating it into the surface of pneumatic fingers for hardness sensing. Luo et al. [74] fabricated a capacitive sensor with a dielectric layer of inclined micro-pillar arrays, utilizing the reduction of air gaps during pressure loading to increase capacitance, and its simple, easy-to-manufacture structure makes it highly suitable for wearable technologies. Capacitive sensors offer high sensitivity and precision, making them widely used for precise tactile sensing and surface texture recognition.

### 2.3. Piezoelectric tactile sensors

Piezoelectric tactile sensors work by generating a voltage change in piezoelectric materials when subjected to external force [75–78]. Common piezoelectric materials include polyvinylidene fluoride (PVDF) [79–81] and lead zirconate titanate [82, 83]. External pressure induces deformation in the material, causing a change in the dipole density, which generates a voltage signal. These sensors offer sensitive dynamic responses, making them suitable for vibration detection and texture recognition, but they tend to perform poorly in static pressure sensing. Seong et al. [76] developed BaTiO<sub>3</sub>/PDMS materials by combining piezoelectric materials with micro-patterning techniques, exhibiting high sensitivity and a wide pressure range. Huang et al. prepared PVDF/BTO composites and


used a porous structure as a pressure sensor, with a high output of approximately 20.0 V and a sensitivity of  $\sim 132.87$  mV/kPa, demonstrating long-term durability [84]. PVDF-based sensors are widely applied in practical scenarios due to their flexibility, low cost, and ease of processing.

### 2.4. Triboelectric tactile sensors

Triboelectric tactile sensors detect changes in voltage generated by the contact and separation of materials with different electronegativities. The triboelectric nanogenerators (TENG) senses pressure through the combination of triboelectric and electrostatic effects [85, 86]. Its output signal is closely related to changes in the contact area and pressure frequency. Triboelectric sensors exhibit strong dynamic pressure sensing capabilities, making them suitable for wearable devices and flexible sensors. Common materials used include PDMS and PTFE [87–89]. Dong et al. [90] developed a skin-inspired triboelectric nanogenerator for biomechanical energy harvesting and multifunctional pressure sensing. By embedding silver-nylon fibers into an elastomer, they successfully achieved good stretchability, pressure sensitivity, and mechanical stability, applying it in physiological signal monitoring and intelligent prosthetics [90]. Wang et al. [91] fabricated a PAM/BaTiO<sub>3</sub> composite film that is flexible, stretchable, and highly transparent, achieving high sensitivity to pressure via the triboelectric effect (Figure 2 [53, 60, 73, 74, 76, 84]).

Figure 2

Example of sensors with four different mechanisms: (a) changes in MWCNT/quartz fabric structure before and after pressure loading, (b) structural and circuit changes of MXene/PDMS structure under different pressure loading, (c) structural and circuit changes of MWCNT/PDMS layer during pressure loading, (d) pressure sensing process of microcolumn structure, (e) mechanism of BaTiO<sub>3</sub>/PDMS pyramid structure under pressure loading, and (f) changes in loading and unloading process of PVDF/BTO composite

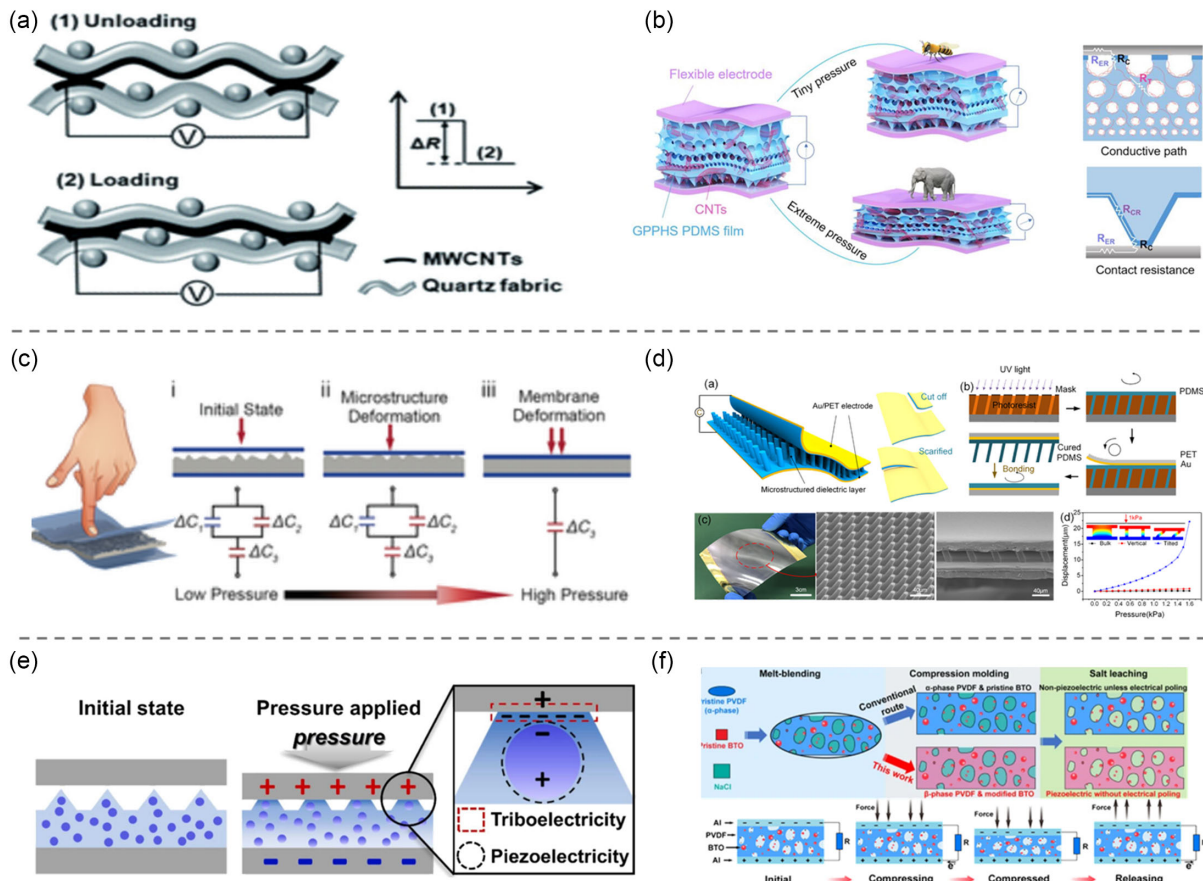

**Table 1**  
**Sensitivity and performance comparison of different types of sensors**

Sensor type	Sensitivity (kPa <sup>-1</sup> )	Materials used	Range (KPa)	Response time	Reference
Resistive	0.127	CNTs@HAPAAm	0–50	600 ms	[53]
Resistive	4.97	rGO@CNTs/CS	0–3	170 ms	[52]
Capacitive	0.33	PDMS@Graphene	0–5	20 ms	[67]
Capacitive	2.04	PDMS@AgNWs	0–8	100 ms	[65]
Piezoelectric	0.0393	P(VDF-TrFE) @BN	–	30 ms	[75]
Piezoelectric	4.19	BaTiO <sub>3</sub> @PDMS	0–100	–	[76]
Triboelectric	0.75	BaTiO <sub>3</sub> @PDMS@AgNWs	0–140	–	[86]
Triboelectric	–	EGaIn@PDMS	0–100	–	[88]
Ion-electronic	3302	PVA@H <sub>3</sub> PO <sub>4</sub>	0–400	9 ms	[92]
Ion-electronic	1716	PAM@Alg@Zn <sup>2+</sup>	0–200	30 ms	[93]

An analysis of the working principles of tactile sensors reveals that the material requirements vary depending on the sensor type. Resistive and capacitive sensors depend on the conductivity and dielectric layer properties, with common materials including nanometer-scale conductive substances (e.g., carbon nanotubes, silver nanowires, graphene) and highly elastic and flexible matrix materials (e.g., PDMS). Piezoelectric and triboelectric sensors, on the other hand, rely primarily on the material's stress and charge response mechanisms. PVDF, due to its good flexibility and low production cost, is a popular choice for piezoelectric sensors. Triboelectric sensors achieve efficient energy conversion and pressure sensing through composite materials with different electronegativities. Typically, representative sensitivity pairs of different mechanisms are shown in Table 1. Representative structural and material comparisons of haptic sensors of different mechanisms from 2010 to 2025 are shown in Table 2. PDMS-based materials (with CNTs, silver nanowire (AgNWs), MXene) are commonly used for flexible, stretchable sensors due to PDMS's inherent flexibility and the conductive fillers enhancing its

performance. These materials offer a balance of mechanical flexibility and electrical conductivity. PU and fiber-based materials provide high mechanical flexibility and can be used in textile-based sensors. Their properties can be further optimized by adding conductive fillers such as CNTs and AgNWs. PVA and PAM-based composites show high sensitivity, with PVA/MXene being particularly noted for its impressive sensitivity, making it useful in highly responsive sensor applications. Materials like PDMS, PU, Fiber, PVA, and PAM, when combined with conductive fillers like CNTs, AgNWs, and MXene, can be engineered to provide sensors with varying sensitivities, flexibility, and mechanical properties. Examples of different materials are shown in Table 3. In addition, some commercial sensors are listed as shown in Table 4.

## 2.5. The development of ion-electronic sensors

Although capacitive sensors have a simple structure and high stability, their ability to achieve high sensitivity over a wide range is limited when relying solely on changes in sensor thickness. In

**Table 2**  
**Technology evolution in tactile sensors (2010–2025)**

Year	Sensing Type	Structure	Materials	References
2010–2014	Resistance	Hollow-Sphere	PPy	[94]
	Resistance	Copper Mesh	Graphene/PDMS	[95]
	Capacitance	Air Gap	PDMS/SWNT	[96]
	Capacitance	Hydrophobic Sponge	PDMS/Al	[97]
	Piezoelectric	–	Zirconate Titanate	[98]
	Piezoelectric	Dome	PDMS	[99]
	Triboelectric	Nanorod (NR) arrays	FEP	[100]
	Triboelectric	Etched Nanowire	PA/PTFE	[101]
2015–2020	Resistance	Pyramid	PDMS/AgNWs	[102]
	Resistance	Porous	PAA/CNT	[103]
	Capacitance	Micro-pillar Arrays	Au/PET	[74]
	Capacitance	Pyramidal Microstructures	ITO/PET/PDMS	[104]
	Piezoelectric	–	PTNWs/Graphene	[77]
	Piezoelectric	–	AlGaN/GaN	[105]
	Triboelectric	Micro/Nanostructure	PDMS/EVA	[22]
	Triboelectric	Interlocking	PDMS/PTFE/AgNWs	[106]
2021–2025	Resistance	Spider Web-Like	PIFs/CNT	[107]
	Resistance	Multi-level nano-Microstructures	PDMS/MXene	[108]
	Capacitance	Micro-cilia array	CNT/PDMS	[19]
		Micro-dome array		
	Capacitance	Graded intrafillable	PVA/H <sub>3</sub> PO <sub>4</sub>	[92]
	Piezoelectric	–	Fibers/CNT	[109]
	Piezoelectric	Micropyramidal	BaTiO <sub>3</sub> /PDMS	[76]
	Triboelectric	Cellulosic	CNTs/ Cellulosic	[110]
	Triboelectric	LiCl/ CNTs	Ion gradient	[43]








**Table 3**  
Comparison of common flexible sensor materials and their sensitivities

Base material (Conductive)	Materials	Sensitivity	References
PDMS (CNTs AgNWs MXene)	PDMS/CNTs	GF=17.5	[111]
	PDMS/MWNTs	40.12 KPa <sup>-1</sup>	[60]
	reCNT-PDMS	372.2 kPa <sup>-1</sup>	[112]
	PDMS/AgNWs	2.04 kPa <sup>-1</sup>	[65]
	PDMS/AgNWs/CNFs	—	[64]
	AgNWs/PDMS	—	[113]
	Mxene/CFs/PDMS	35.12 kPa <sup>-1</sup>	[114]
	AgNWs/MXene/PDMS	0.812 kPa <sup>-1</sup>	[115]
	PDMS/ MXene	39.3 kPa <sup>-1</sup>	[116]
	PU/CNTs	—	[117]
PU (CNTs AgNWs MXene)	PU/CNTs-COOH	GF=17.5	[118]
	CNTs/PU/AgNWs	—	[119]
	PU/AgNWs	0.009 KPa <sup>-1</sup>	[54]
	PU/AgNWs	6.258 KPa <sup>-1</sup>	[120]
	PU/PDA/AgNWs	—	[121]
	MXene/TPU/PAN	0.208 KPa <sup>-1</sup>	[122]
	MXene@PU	GF=0.7659	[123]
	MXene/polyurethane (PU)	150.6 KPa <sup>-1</sup>	[124]
	CNTs/SNWF	GF=74	[125]
	CNTs/AgNWs@p-SF	GF=740	[126]
Fiber (CNTs AgNWs MXene)	Sericin-CNTs	—	[127]
	Silk fibroin/AgNWs	2.27 KPa <sup>-1</sup>	[128]
	AgNWs/pSBS/ Fiber	5.2 KPa <sup>-1</sup>	[129]
	AgNWs/Fiber	0.2 KPa <sup>-1</sup>	[130]
	MXene/AgNWs/Fabric	14.28 KPa <sup>-1</sup>	[131]
	Mxene/Paper	0.04 KPa <sup>-1</sup>	[132]
	MXene/Fabric	6.31 KPa <sup>-1</sup>	[133]
	PVA/mCNT-OH	GF=2.52	[134]
	SWCNT/PVA	—	[135]
	PVA/SS@CNTs	GF=4.75	[136]
PVA (CNTs AgNWs MXene)	PVA/AgNWs	—	[137]
	PVA/CMS/AgNWs	—	[138]
	PVA/AgNWs	—	[139]
	MXene/PVA	2320.9 kPa <sup>-1</sup>	[140]
	PVA/MXene	0.45 kPa <sup>-1</sup>	[141]
	GO/PVA/MXene	1.744 kPa <sup>-1</sup>	[142]
	PAAm/CNTs	GF=343	[143]
	CNTs/HAPAAm	GF=2	[53]
	PAM/CNTs	GF = 54.89	[144]
	Aam/AgNWs	—	[145]
PAM (CNTs AgNWs MXene)	PAM/AgNWs	GF = 1.8	[146]
	PVA/TA/PAM/AgNWs	—	[147]
	PAM/MXene	782.7 kPa <sup>-1</sup>	[148]
	PAAm/SA/MXene	GF = 7.4	[149]
	PAAm/PVA/MXene	GF = 5.02	[150]

2012, Nie et al. [151] proposed an innovative sensor structure using ion-containing droplets as the medium between electrodes. The double electric layer structure formed by ions reduces the capacitance gap to the nanoscale (~1 nm), significantly increasing charge density and enhancing sensor sensitivity. This innovation overcame the traditional thickness limitations of capacitive sensors, optimizing performance by altering the electrode contact area rather than relying solely on thickness changes. Furthermore, the design of ion-droplet electronic sensors has opened new research directions for the application of ionic gels and ionic

**Table 4**  
Commercially available tactile sensors


Sensing type	Schematic diagram	Company
Resistance		Suzhou Nengsda Electronic Technology Co., Ltd.
Capacitance		Suzhou Nengsda Electronic Technology Co., Ltd.
Piezoelectric		Suzhou Nengsda Electronic Technology Co., Ltd.
Resistance		Guangzhou Puhui Technology Co., Ltd.
Piezoelectric		Murata Manufacturing Co., Ltd.

droplets. Ionic gels, as a new material, have shown significant advantages in flexible sensors. In 2014, Sun et al. [152] proposed an ion-based hydrogel capacitive sensor with excellent mechanical flexibility and transparency, capable of detecting tiny pressure changes, and demonstrated the key role of ionic materials in improving sensor performance.

#### 2.5.1. The development of ion-electronic sensors

The term “iontronic” officially entered the research field of flexible pressure sensors. Nie et al. [153] developed an ion-electronic microdroplet sensor with extremely high sensitivity, reaching 0.43 nF/kPa. Compared to traditional parallel-plate capacitive sensors, this sensor significantly improved the response sensitivity between pressure and capacitance through the double electric layer mechanism of ionic materials such as ionic liquids, ionic gels, or ionic nanofibers. In 2015, Nie et al. [154] successfully replaced ionic droplets with ionic gels as the medium, overcoming the instability of droplets while maintaining the high conductivity of ionic liquids and offering better mechanical stability. The new design of the ionic electronic thin-film sensor demonstrated extremely high capacitance per unit area (5.4  $\mu\text{F}/\text{cm}^2$ ) and ultra-high sensitivity (3.1 nF/kPa), with sensitivity over 1,000 times that of traditional solid-state sensors [154]. In 2018, Zhu et al. [155] combined a single-sided ion-electronic device with skin, proposing a novel pressure sensor architecture for wearable sensor applications. This architecture utilized the epidermal-ion-electronic interface and exhibited high adaptability under ultra-thin packaging (1.9  $\mu\text{m}$ ), effectively detecting internal and external mechanical stimuli [155]. In 2019, Choi et al. [156] fabricated a pyramid-shaped ionic gel structure that can detect both pressure and shear force, with high sensitivity and a wide range of detection capabilities [156]. In 2021, Shen et al. [157] developed a supercapacitive tactile sensor using hydrogels and arranged it in an array for robotic surfaces, achieving high sensitivity and resolution. In 2021, Zhu et al. [158] implemented pressure sensing through the buckling instability structure of elongated micropillars and replaced ionic materials with human skin, ensuring excellent biocompatibility. This ion interface holds great potential for

**Figure 3**  
The development and application of ion-electronic mechanism-based sensors

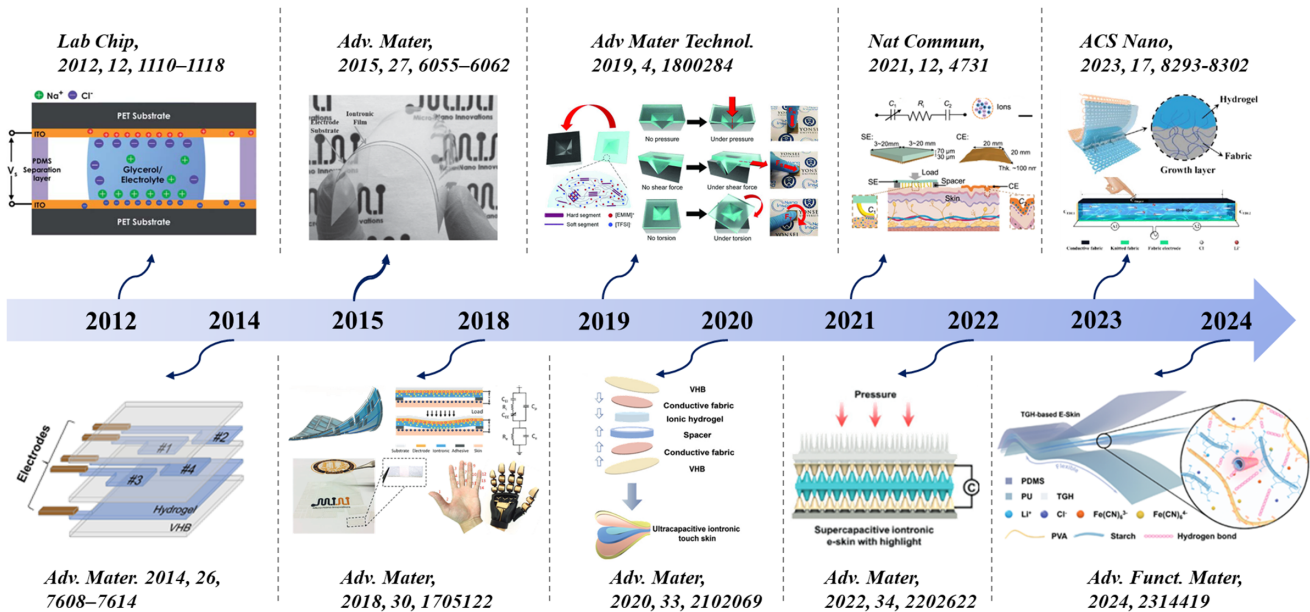

intelligent epidermal monitoring and medical devices [158]. In 2022, Niu et al. [159] combined the triboelectric effect and ion-electronic mechanisms to fabricate a bionic hair-like structure with dual-interlocking microcone electronic skin, applied to both static and dynamic tactile sensing, and conducted experiments on tactile gloves for sign language recognition and robot interaction [159]. In 2023, Xu et al. [160] developed a stretchable ion-electronic touchscreen panel with good touch sensing resolution, suitable for handwriting interaction, gaming control, and expanding research on ion-electronic mechanisms in wearable fields. In 2024, Li et al. [161] also utilized hydrogels as human-machine interface layers, fabricating stretchable, high-ion-conductivity hydrogel structures combined with machine learning for recognition and authentication, showcasing the immense potential of ionic conductive layers in human-machine interactions (Figure 3).

### 2.5.2. Microstructural ion-electronic pressure sensing

Microstructural design plays a crucial role in enhancing the performance of tactile sensors. By optimizing the microstructure, the sensitivity and response speed of the sensor can be significantly improved. Microstructure design typically involves controlling the deformation capacity of the sensor and the electrode contact area, both of which influence the sensor's performance.

For instance, pyramid-shaped microstructures take advantage of the compressibility of air in the pores to enhance the deformation ability while reducing the electrode contact area, thereby improving the response speed. Novel microstructures, such as micro-domes and interlocking structures, are widely used in piezoelectric and triboelectric sensors, contributing to improved sensitivity and accuracy. The micro-dome design enables the sensor to deform easily under pressure, enhancing its sensitivity to minute pressure changes.

In 2014, Tee et al. [162] introduced pyramid microstructures to enhance the device's deformation capacity through the compressibility of air in the pores, while reducing the electrode contact and adhesion area to increase response speed. Following this, micro-domes [19, 163, 164], porous structures [165–168],

and interlocking microstructures [169–171] have been widely applied in capacitive, resistive, and triboelectric sensing mechanisms. Despite the effective enhancement of sensitivity and response speed with the introduction of microstructures, the sensor's working mechanism often relies on the deformation of the intermediate layer. Thus, even with microstructural incorporation, there remain certain limitations in sensitivity and response speed. In this context, the application of microstructures in ion-electronic sensors has been further optimized. In 2018, Qiu et al. [172] reported a low-cost microstructural ion gel (MIG), which features a uniform conical surface microstructure, effectively enhancing the sensor's sensitivity and response range. The MIG film was patterned using soft lithography from the leaves of *Calathea zebrina* and integrated with a flexible electrode interlayer, maintaining excellent sensitivity across a wide range from 0.1 Pa to 115 kPa. The microstructure optimization allows the device to maintain high sensitivity even under low-pressure conditions, making it suitable for haptic perception in human-machine interaction applications [172].

In 2022, Tang et al. [173] proposed a TIS device architecture that achieves high sensitivity and excellent optical transparency. This device employs a two-layer sensing structure combining transparent AgNw conductive films with a microscopic hemispherical transparent ion elastomer array, with a nonionic liquid filling between the ion electrodes and counter electrodes. This design not only maintains the high sensitivity of the device but also enables dual optical and tactile functions without compromising transparency, making it capable of evaluating tissue stiffness during endoscopic imaging [173].

In 2020, Bai et al. [92] introduced a graded, fillable microstructure (GIA) design that significantly improves sensitivity and extends the pressure response range. The GIA structure accommodates deformed surface microstructures via undercuts and grooves, enhancing compressibility and pressure response range. It demonstrates extremely high sensitivity and ultra-high resolution across a broad pressure range from 0.08 Pa to 360 kPa while maintaining significant mechanical stability [92]. In 2022,

Guo et al. [174] proposed an integrated hybrid device based on ion sensing and electrochromic display for interactive pressure sensing. The device uses capacitance changes in the ion gel layer to achieve highly sensitive pressure detection with a large capacitance response range. The introduction of microstructures improves the contact area between the electrodes and the gel, increasing the electrical double-layer (EDL) capacitance and allowing the sensor to maintain high sensitivity over a wider pressure range [174]. In 2023, Guo et al. [175] used a simple photopolymerization process to fabricate crosslinked ion hydrogels, integrating them into a wireless monitoring system as a pressure sensor application. Unlike conventional capacitive pressure sensors, ion-electronic sensors replace the insulating dielectric layer with an ion hydrogel layer, enhancing sensitivity through the EDL formed at the electrode-ion membrane interface. This design enables high noise immunity and significant signal enhancement in complex dynamic environments [175].

In 2022, Bai et al. [176] further optimized flexible ion-electronic pressure sensors by incorporating micro-pillars to improve sensitivity and linear response. The micro-pillar design effectively enhances the structure's compressibility, evenly distributes stress, prevents signal saturation, and increases the initial contact area, ultimately achieving high sensitivity ( $49.1 \text{ kPa}^{-1}$ ) and good linearity [176] (Figure 4 [92, 172–176]).

## 2.6. Multifunctional sensing systems

Multifunctional sensing systems integrate different types of sensors (such as temperature [177–179], slide [180–182], humidity) [183–185] to simultaneously detect various physical and chemical stimuli. These systems are particularly suitable for

fields like human-machine interaction and robotic perception, where they can significantly enhance sensing accuracy and response speed. When designing multimodal sensing systems, a common approach is to integrate multiple sensors into a single platform, creating a multifunctional sensing system. By responding to multiple input stimuli, these systems effectively simplify the device structure and reduce system complexity.


For example, in the design of pressure-temperature dual-functional sensors, the capacitance and resistance changes of a single sensing element can simultaneously respond to different stimuli from temperature and pressure, thereby simplifying the device structure and reducing the complexity of the measurement system. In this process, neural networks can efficiently extract useful information from mixed signals. Ren et al. [186] successfully achieved dual sensing of temperature and pressure using a gradient ion gel via an electric field-induced strategy. By employing the Vogel-Tamman-Fulcher equation, they established the relationship between capacitance, temperature, and pressure, significantly improving the sensor's measurement accuracy [186].

Machine learning algorithms also play an important role in multimodal sensor systems. Ren et al. [186] leveraged the unique response characteristics of capacitance and resistance to changes in temperature and pressure to achieve synchronous measurement of both temperature and pressure. They used neural network technology as a data processing method to establish a mapping between capacitance/resistance signals and pressure/temperature, thus enabling high-precision calibration of the sensors [93].

Ding et al. [185] fabricated a pressure/proximity dual-mode sensor using a template method. By utilizing the sensitivity differences between pressure sensing and proximity sensing, they achieved crosstalk-free detection and differentiation, offering potential

Figure 4

Microstructure devices: (a) structural diagram of conical leaf template, (b) schematic diagram of micro-dome structural layer, (c) schematic diagram of filling structure of sandpaper template, (d) schematic diagram of hollow and microcolumn structural layer, (e) schematic diagram of hollow structural layer, and (f) interlocking fill structure layer diagram

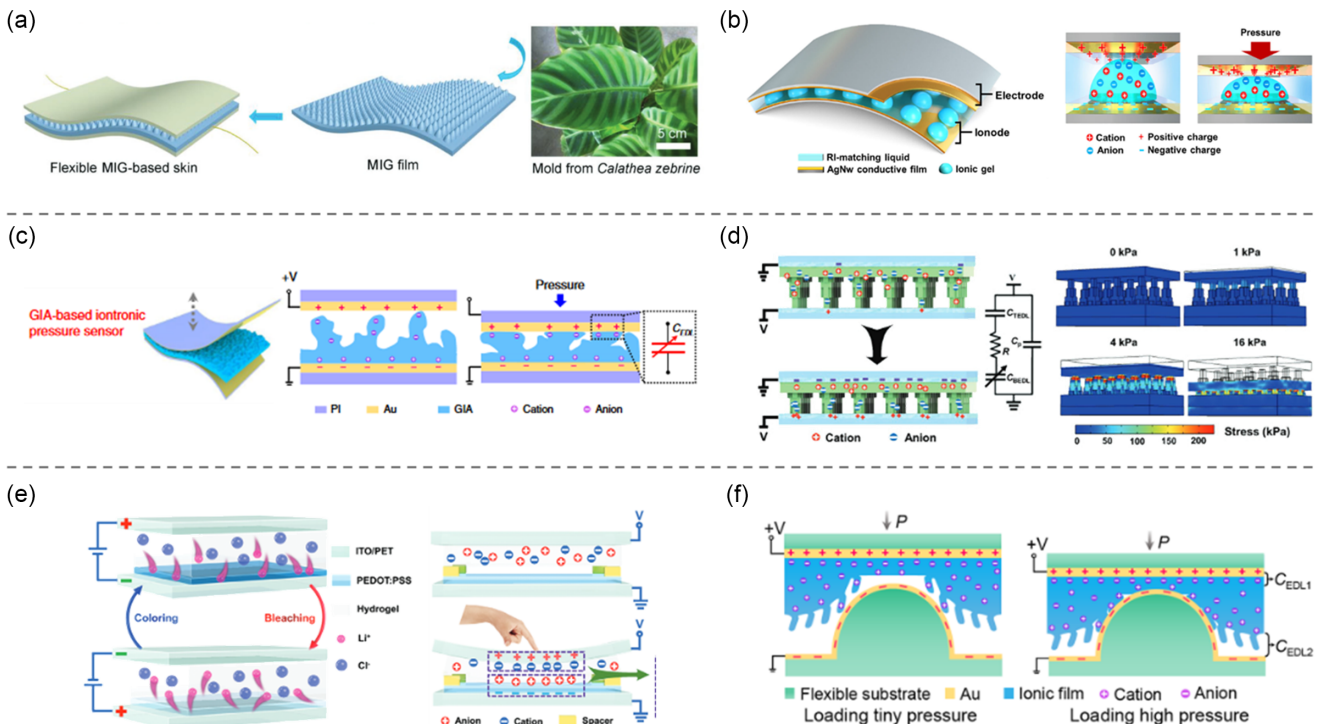



applications in robotic touch and human-machine interaction. Chen et al. [187] developed a pressure-temperature-proximity sensor using ion gel fibers. With the assistance of the EDL effect, they achieved highly sensitive pressure sensing, while temperature sensing was enabled through the dielectric constant of the gel layer. Proximity detection was realized via changes in the electric field. This design provides new insights for the application of ion-electronic mechanism sensors in the wearable field. Zhu et al. [188] proposed a triboelectric-based technology capable of detecting bending and sliding in multiple directions and developed a haptic feedback glove on this basis, using machine learning to assist in object recognition tasks. These innovations showcase the vast potential applications of multimodal sensor systems in smart devices and human-machine interaction. Another type of multi-sensor system integrates different sensor types into the same platform to form multimodal perception. One effective strategy is to carefully select materials suited to specific stimuli to differentiate various types of signals. Ge et al. [189] proposed a low-coupling multifunctional electronic skin capable of simultaneously sensing proximity, pressure, temperature, and relative humidity, demonstrating its potential in multimodal perception. Zhang et al. [190] developed a stretchable sensor that can recognize various stimuli such as in-plane strain, temperature, and pressure. These three different sensory functions were achieved using a mechanical color-changing layer, a thermal resistance layer, and a triboelectric layer, respectively, each utilizing their unique materials and mechanisms to decouple different sensory signals. The integration and optimization of these technologies have greatly enhanced the performance of sensor systems, making the detection

of various physical and chemical stimuli more precise. By achieving high-performance, multifunctional tactile sensor systems, these advancements have not only promoted the application of sensor technologies in multiple fields but also provided more accurate and reliable perceptual capabilities for various smart devices (Figure 5 [93, 185, 186, 189, 190]).

### 3. Technological Advances and Challenges of Tactile Sensors in Robotic Surface Applications


Tactile perception is a core capability for robots to interact with their environment and perform fine manipulation tasks. In recent years, significant breakthroughs have been made by integrating new sensor designs with artificial intelligence algorithms. The integration of tactile sensors on robotic surfaces has not only enhanced the adaptability and safety of grasping operations but also provided solid technical support for multimodal perception in complex scenarios.

#### 3.1. Application of tactile sensors in robotic grasping control

Traditional robotic grasping relies on visual feedback, but often lacks real-time sensing of tactile information, such as contact forces and material properties. Sundaram et al. [191] proposed a solution based on a scalable tactile glove (containing 548 sensors). This system uses piezoelectric films and conductive fiber networks to create a distributed sensor network, combined with deep convolutional neural networks to perform object recognition,

Figure 5

**Multifunctional sensor device: (a) capacitor and resistor signals are used to achieve temperature-pressure sensing, (b) bionic jellyfish structures use different sensitivity to achieve pressure-temperature sensing, (c) only capacitive signals are used to achieve pressure-proximity sensing, (d) vertical integrated pressure-temperature-approximation-humidity sensing diagram, and (e) strain-temperature-pressure sensor with tensile properties**

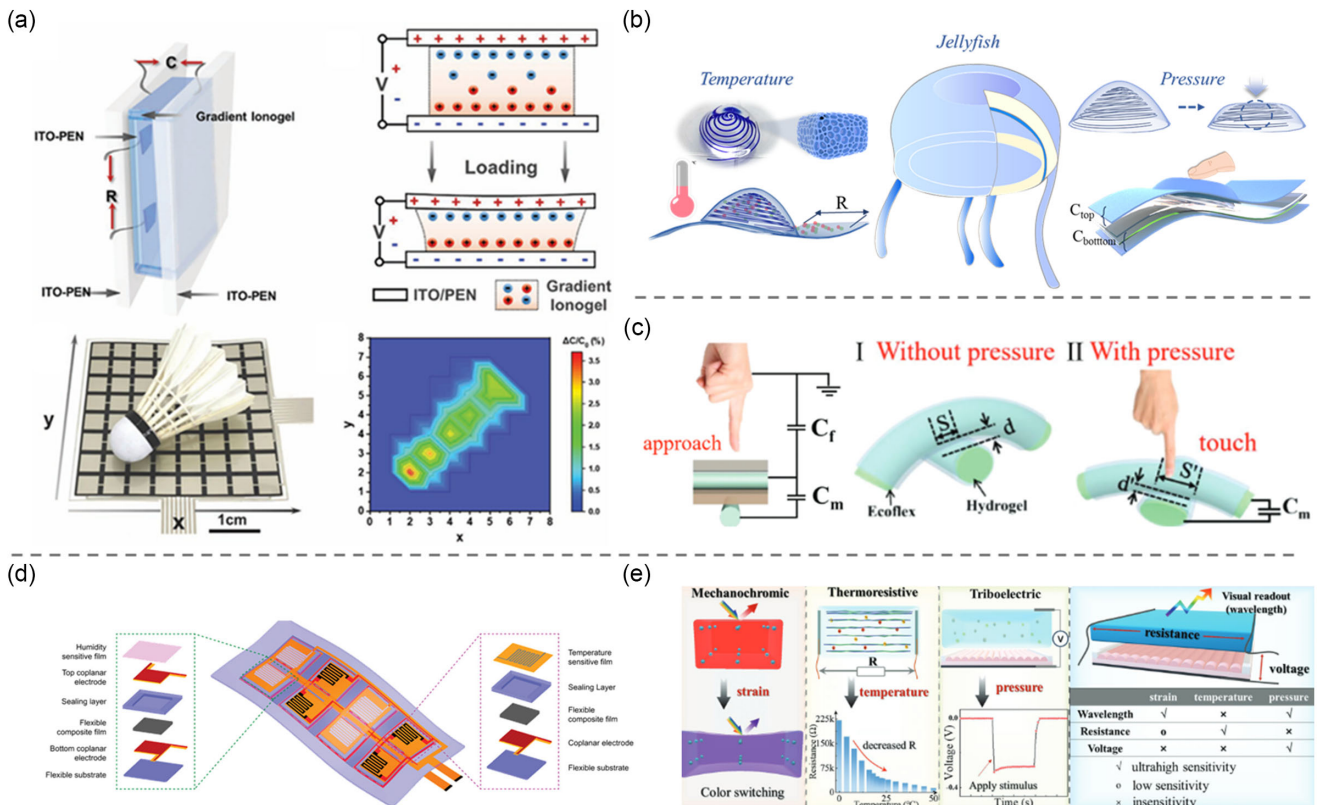



weight estimation, and tactile pattern analysis. The resulting dataset of 135,000 frames of full-hand tactile data provides an important research benchmark in the field of tactile perception [191]. Similarly, Shen et al. [157] introduced a novel touch skin based on supercapacitive sensing, which combines ion-based hydrogels with conductive fabrics. This significantly enhances the sensitivity and tactile feedback of robotic hands, opening up broad prospects for applications in industrial robots and prosthetics.

Furthermore, Shi et al. [192] present a tactile sensor array based on an ion-electronic mechanism for robotic surfaces, effectively suppressing signal crosstalk while maintaining high-performance pressure sensing. This advancement holds great potential for tactile feedback in robotics and pressure detection in aerospace applications [192].

### 3.2. The role of tactile sensing in material recognition and operational adaptability

The robot's ability to perceive material properties (e.g., softness, roughness) is critical to performing safe operations. Qu et al. [193] described the development of a smart finger using the triboelectric effect, which generates a unique triboelectric fingerprint upon material contact (with an accuracy rate of 96.8%). This approach enables the dual recognition of material types and surface roughness. These breakthroughs not only overcome the limitations of traditional tactile sensors that only measure physical parameters but also pave the way for the perception of psychological parameters in robotic operations, such as tactile texture recognition [193].

Qiu et al. [194] proposed a non-invasive method for quantifying the elastic modulus of soft materials using a

multi-sensory electronic skin and improved machine learning algorithms. By utilizing the synergistic mechanism of piezoelectric signals and strain feedback, the robotic hand can dynamically adjust its grasping force based on the object's softness (ranging from kPa to MPa), successfully applied to sorting fragile items (such as fruits of varying freshness) [194] (Figure 6 [157, 191–194]).

### 3.3. Integrated development of multimodal tactile sensing systems

The integration of tactile sensors with other perception modules is driving the multifunctional development of robots. Yu et al. [195] presented a flexible physical and chemical sensor array (M-BOT system) fabricated using inkjet printing technology, which combines tactile sensing, electrophysiological signal detection, and chemical hazard identification. By applying machine learning algorithms to analyze surface electromyographic signals and tactile feedback, the system can make autonomous decisions and issue threat warnings in contaminated environments. Such multimodal integration technologies not only expand the application boundaries of tactile sensors (e.g., in explosive detection and pathogen screening) but also introduce a new mode of interaction for remote robot operation in extreme environments [195].

Liu et al. [196] proposed a closed-loop human-machine interface system based on skin-integrated electronics, which integrates tactile feedback and visual signals, and enables wireless motion capture via Bluetooth, Wi-Fi, and the Internet. This system shows great potential in non-contact biological sample collection and the care of patients with infectious diseases. Its innovation lies in enhancing

Figure 6

**Robotic tactile sensing: (a) scalable haptic gloves with distributed sensing systems, (b) hydrogel array devices for robotics and prosthetics, (c) ion-electron mechanism array applied to the surface of robotic wrist, (d) triboelectric mechanism enables material type and roughness identification, and (e) piezoelectric signal and strain feedback are used together to sort fragile items feedback**


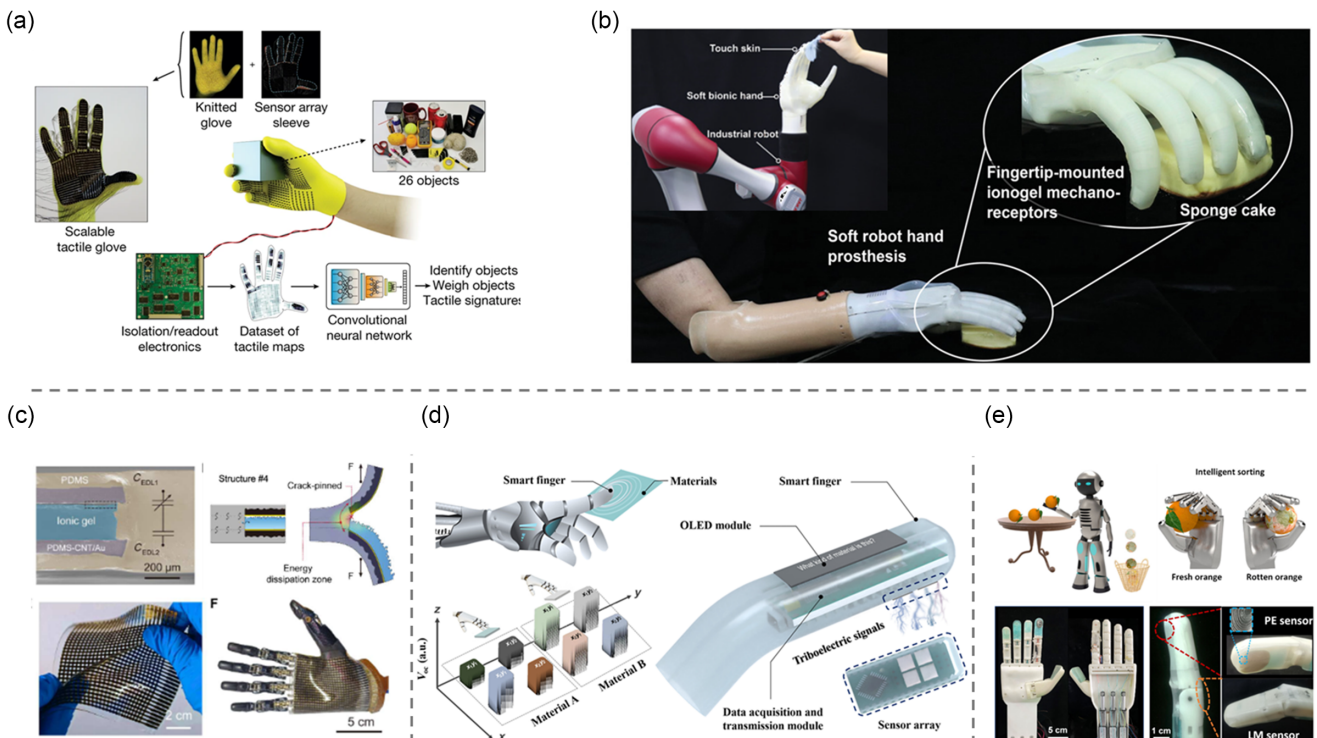


Figure 7

Integration of tactile sensing on robot surfaces: (a) sensor integrating tactile perception, electrophysiological signals, and chemical hazard identification, (b) closed-loop human-machine interface system for enhanced remote operation capabilities, (c) temperature-humidity-light-magnetic field multi-dimensional perception, (d) tactile sensing system for stable material identification, and (e) fingertip-inspired gradient ion gel sensors for grasping under extreme conditions

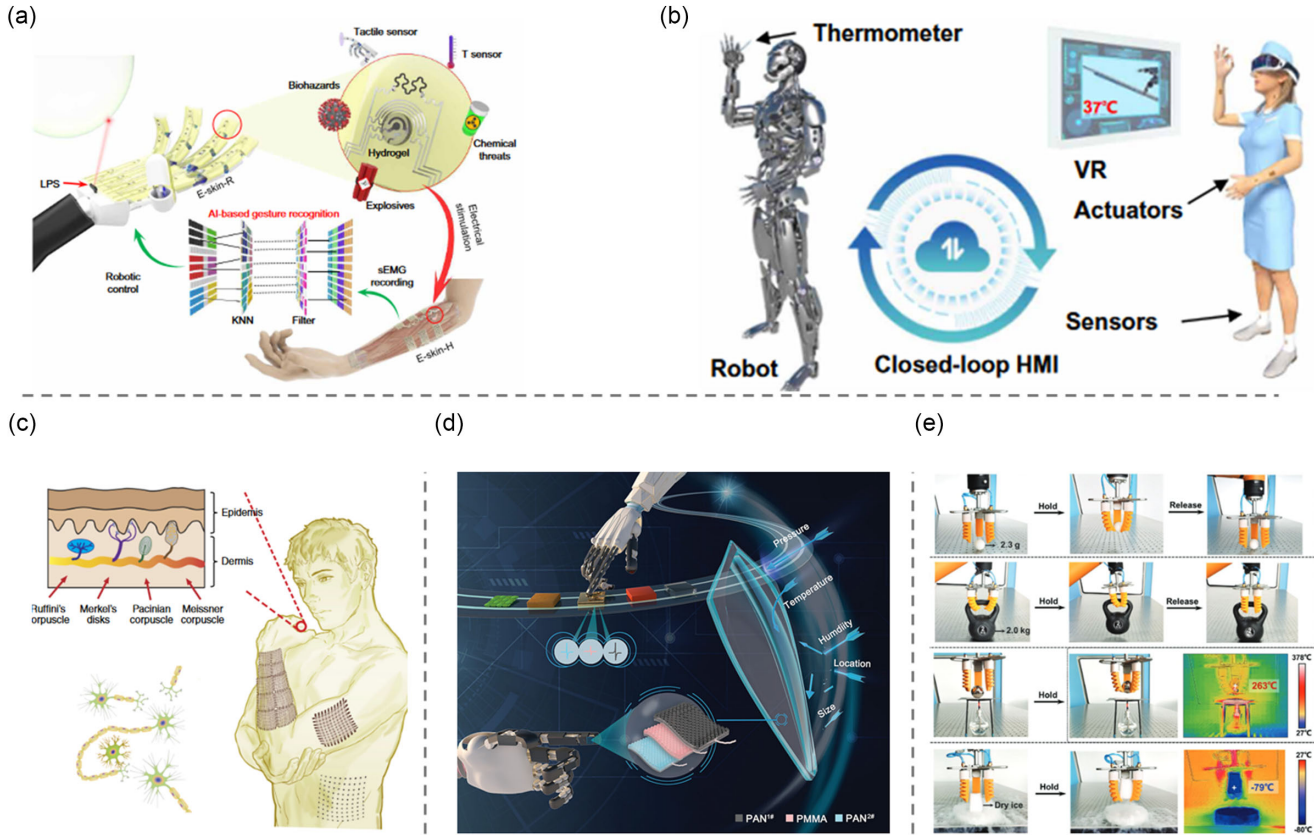

remote robotic control through tactile feedback, playing a significant role in improving remote control precision [196].

In the field of multimodal sensing, Hua et al. [197] introduce electronic skin based on a polyimide network, successfully extending the sensory capabilities of E-Skin to multiple dimensions, including temperature, humidity, light, and magnetic fields [197].

Wei et al. [198] demonstrated an intelligent tactile sensing system combining TENG and deep learning technology, which can reliably identify materials under various contact conditions, achieving an accuracy rate of 96.62%. This system has promising applications in bionic prosthetics and virtual space construction [198].

Ren et al. [186] presented a flexible sensor based on gradient ionic gels, inspired by the structure of human fingertip skin, exhibiting high sensitivity and a wide detection range ( $3 \times 10^2$  to  $2.5 \times 10^6$  Pa), while maintaining excellent performance under extreme conditions (from  $-108^\circ\text{C}$  to  $300^\circ\text{C}$ ). This sensor has significant potential in intelligent grasping systems, capable of adapting to diverse tactile tasks in complex environments [186] (Figure 7 [186, 195–198]).

### 3.4. Current challenges and future directions

Despite significant advancements in tactile sensing technology, several key challenges remain, including the balance between sensor density and flexibility, bottlenecks in multimodal data fusion, the need for modeling tactile psychophysical parameters, environmental adaptability issues, and limitations in low-cost

integration. Future research should focus on the development of biomimetic materials, such as self-healing conductive polymers and smart nanomaterials, to enhance durability and adaptability; the integration of neuromorphic computing chips for embedded processing to optimize real-time tactile perception data; the creation of cross-modal perception frameworks to improve robots' environmental adaptability; large-scale manufacturing of flexible electronic skins to achieve low-cost and high-performance tactile sensing; and AI-driven intelligent tactile interactions to enhance tactile recognition capabilities, thereby advancing fields like biomimetic prosthetics and smart gloves [199–202].

## 4. Conclusion

As robotics technology continues to evolve toward greater autonomy and intelligence, tactile sensing systems have become one of the key technologies for overcoming the interaction bottleneck between robots and complex environments. The sensitivity, multimodal perception capabilities, and environmental adaptability of tactile sensors directly impact the operational precision and adaptability of robotic systems across various application scenarios. This is particularly important in fields such as precision surgery, minimally invasive operations, and complex industrial manufacturing, where tactile sensors capable of providing real-time, precise force feedback are becoming increasingly vital in robotic perception systems.

Currently, the rigid structure, limited sensitivity, and single-modal perception of traditional tactile sensors restrict their application in

complex interactive scenarios. In recent years, tactile sensor technologies based on flexible electronic materials and biomimetic microstructure designs have offered new solutions to address these challenges. The emergence of novel sensing materials, such as ionic gels and flexible electronic skin, has significantly enhanced the sensitivity, response speed, and adaptability of sensors, driving their widespread application in fields like healthcare, industry, and wearable devices. Different types of sensors, such as resistive, capacitive, piezoelectric, and triboelectric sensors, each exhibit unique advantages in their respective applications, with piezoelectric and triboelectric sensors particularly excelling in dynamic response and texture recognition.

However, despite some progress, tactile sensing technology still faces numerous challenges. For instance, enhancing the multimodal perception ability of sensors and improving their accuracy in sensing complex mechanical parameters (such as normal and shear forces) remain hot research topics. Furthermore, the high sensitivity and fast response characteristics of sensors may encounter issues of flexibility and stability in large-scale applications, requiring further optimization through material innovations and microstructure designs.

Future research directions may focus on several key areas: First, enhancing the sensitivity and environmental adaptability of sensors through the use of flexible materials and biomimetic designs, second, integrating multimodal sensing systems to enable the simultaneous detection of multiple physical or chemical parameters on a single sensor platform, thereby improving the comprehensiveness and precision of robotic perception. Finally, combining machine learning and intelligent algorithms for sensor data processing could significantly enhance the system's adaptability and intelligence, making tactile sensing technology more suitable for complex and dynamic working environments.

Overall, with the continuous advancement of flexible materials, sensor designs, and intelligent algorithms, tactile sensors are expected to play an increasingly important role in future robotic perception systems, providing strong support for the further development of robotics technology.

## Funding Support

This work is supported by the National Natural Science Foundation of China (NSFC, No. 52372042), National Key R&D Program of China (2019YFA0705201), Foundation for Innovative Research Groups of the National Natural Science Foundation of China (No. 51521003), Self-Planned Task of State Key Laboratory of Robotics and System (HIT) (No. SKLRS202212B).

## Ethical Statement

This study does not contain any studies with human or animal subjects performed by any of the authors.

## Conflicts of Interest

PingAn Hu is the Editor-in-Chief for Smart Wearable Technology and was not involved in the editorial review or the decision to publish this article. The authors declare that they have no conflicts of interest to this work.

## Data Availability Statement

Data sharing is not applicable to this article as no new data were created or analyzed in this study.

## Author Contribution Statement

**Huiwen Ren:** Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization. **Wangyang Li:** Methodology, Software, Validation, Formal analysis, Investigation, Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization. **Yanan Ding:** Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization. **Yuming Feng:** Writing – original draft. **Hexin Li:** Resources, Data curation, Writing – original draft, Writing – review & editing, Visualization. **Jianyang Li:** Writing – original draft, Writing – review & editing. **Jia Zhang:** Writing – original draft, Writing – review & editing, Supervision. **Haiping Xiao:** Writing – original draft, Writing – review & editing. **Jialu Li:** Writing – original draft, Writing – review & editing. **Shuai Wang:** Writing – original draft. **Cong Huang:** Writing – original draft, Writing – review & editing, Supervision. **Li Jiang:** Writing – original draft, Writing – review & editing, Supervision. **PingAn Hu:** Conceptualization, Methodology, Writing – original draft, Writing – review & editing, Supervision, Project administration, Funding acquisition.

## References

- [1] Park, K., Yuk, H., Yang, M., Cho, J., Lee, H., & Kim, J. (2022). A biomimetic elastomeric robot skin using electrical impedance and acoustic tomography for tactile sensing. *Science Robotics*, 7(67), eabm7187. <https://doi.org/10.1126/scirobotics.abm7187>
- [2] Shih, B., Shah, D., Li, J., Thuruthel, T. G., Park, Y. L., Iida, F., & Tolley, M. T. (2020). Electronic skins and machine learning for intelligent soft robots. *Science Robotics*, 5(41), eaaz9239. <https://doi.org/10.1126/scirobotics.aaz9239>
- [3] Liu, F., Deswal, S., Christou, A., Sandamirskaya, Y., Kaboli, M., & Dahiya, R. (2022). Neuro-inspired electronic skin for robots. *Science Robotics*, 7(67), eabl7344. <https://doi.org/10.1126/scirobotics.abl7344>
- [4] Luo, S., Bimbo, J., Dahiya, R., & Liu, H. (2017). Robotic tactile perception of object properties: A review. *Mechatronics*, 48, 54–67. <https://doi.org/10.1016/j.mechatronics.2017.11.002>
- [5] Yang, J. C., Mun, J., Kwon, S. Y., Park, S., Bao, Z., & Park, S. (2019). Electronic skin: Recent progress and future prospects for skin-attachable devices for health monitoring, robotics, and prosthetics. *Advanced Materials*, 31(48), 1904765. <https://doi.org/10.1002/adma.201904765>
- [6] Flesher, S. N., Downey, J. E., Weiss, J. M., Hughes, C. L., Herrera, A. J., Tyler-Kabara, E. C., ..., & Gaunt, R. A. (2021). A brain-computer interface that evokes tactile sensations improves robotic arm control. *Science*, 372(6544), 831–836. <https://doi.org/10.1126/science.abd0380>
- [7] Qiao, H., Sun, S., & Wu, P. (2023). Non-equilibrium-growing aesthetic ionic skin for fingertip-like strain-undisturbed tactile sensation and texture recognition. *Advanced Materials*, 35(21), 2300593. <https://doi.org/10.1002/adma.202300593>
- [8] Stassi, S., Cauda, V., Canavese, G., & Pirri, C. (2014). Flexible tactile sensing based on piezoresistive composites: A review. *Sensors*, 14(3), 5296–5332. <https://doi.org/10.3390/s140305296>
- [9] Gao, Y., Yu, L., Yeo, J. C., & Lim, C. T. (2020). Flexible hybrid sensors for health monitoring: Materials and mechanisms to render wearability. *Advanced Materials*, 32(15), 1902133. <https://doi.org/10.1002/adma.201902133>



- [10] Nasiri, S., & Khosravani, M. R. (2020). Progress and challenges in fabrication of wearable sensors for health monitoring. *Sensors and Actuators A: Physical*, 312, 112105. <https://doi.org/10.1016/j.sna.2020.112105>
- [11] Huang, C., Yang, W., Wang, H., Huang, S., Gao, S., Li, D., ..., & Pan, Y. (2024). Flexible/regenerative nanosensor with automatic sweat collection for cytokine storm biomarker detection. *ACS Nano*, 18(32), 21198–21210. <https://doi.org/10.1021/acsnano.4c04456>
- [12] Lei, Z., Wang, Q., Sun, S., Zhu, W., & Wu, P. (2017). A bioinspired mineral hydrogel as a self-healable, mechanically adaptable ionic skin for highly sensitive pressure sensing. *Advanced Materials*, 29(22), 1700321. <https://doi.org/10.1002/adma.201700321>
- [13] Honda, W., Harada, S., Arie, T., Akita, S., & Takei, K. (2014). Wearable, human-interactive, health-monitoring, wireless devices fabricated by macroscale printing techniques. *Advanced Functional Materials*, 24(22), 3299–3304. <https://doi.org/10.1002/adfm.201303874>
- [14] Koo, J. H., Kim, D. C., Shim, H. J., Kim, T., & Kim, D. (2018). Flexible and stretchable smart display: Materials, fabrication, device design, and system integration. *Advanced Functional Materials*, 28(35), 1801834. <https://doi.org/10.1002/adfm.201801834>
- [15] Li, J., Carlos, C., Zhou, H., Sui, J., Wang, Y., Silva-Pedraza, Z., ..., & Wang, X. (2023). Stretchable piezoelectric biocrystal thin films. *Nature Communications*, 14(1), 6562. <https://doi.org/10.1038/s41467-023-42184-8>
- [16] Liu, Z., Hu, X., Bo, R., Yang, Y., Cheng, X., Pang, W., ..., & Zhang, Y. (2024). A three-dimensionally architected electronic skin mimicking human mechanosensation. *Science*, 384(6699), 987–994. <https://doi.org/10.1126/science.adk5556>
- [17] Boutry, C. M., Negre, M., Jorda, M., Vardoulis, O., Chortos, A., Khatib, O., & Bao, Z. (2018). A hierarchically patterned, bioinspired e-skin able to detect the direction of applied pressure for robotics. *Science Robotics*, 3(24), eaau6914. <https://doi.org/10.1126/scirobotics.aau6914>
- [18] Yan, Y., Hu, Z., Yang, Z., Yuan, W., Song, C., Pan, J., & Shen, Y. (2021). Soft magnetic skin for super-resolution tactile sensing with force self-decoupling. *Science Robotics*, 6(51), eabc8801. <https://doi.org/10.1126/scirobotics.abc8801>
- [19] Ji, B., Zhou, Q., Hu, B., Zhong, J., Zhou, J., & Zhou, B. (2021). Bio-inspired hybrid dielectric for capacitive and triboelectric tactile sensors with high sensitivity and ultrawide linearity range. *Advanced Materials*, 33(27), 2100859. <https://doi.org/10.1002/adma.202100859>
- [20] Cai, Y. W., Zhang, X. N., Wang, G. G., Li, G. Z., Zhao, D. Q., Sun, N., & Yang, Y. (2021). A flexible ultra-sensitive triboelectric tactile sensor of wrinkled PDMS/MXene composite films for E-skin. *Nano Energy*, 81, 105663. <https://doi.org/10.1016/j.nanoen.2020.105663>
- [21] Zeng, J., Zhao, J., Li, C., Qi, Y., Liu, G., Fu, X., ..., & Zhang, C. (2022). Triboelectric nanogenerators as active tactile stimulators for multifunctional sensing and artificial synapses. *Sensors*, 22(3), 975. <https://doi.org/10.3390/s22030975>
- [22] Wang, X., Zhang, H., Dong, L., Han, X., Du, W., Zhai, J., & Wang, Z. L. (2016). Self-powered high-resolution and pressure-sensitive triboelectric sensor matrix for real-time tactile mapping. *Advanced Materials*, 28(15), 2896–2903. <https://doi.org/10.1002/adma.201503407>
- [23] Xiong, J., Chen, J., & Lee, P. S. (2021). Functional fibers and fabrics for soft robotics, wearables, and human-robot interface. *Advanced Materials*, 33(19), 2002640. <https://doi.org/10.1002/adma.202002640>
- [24] Hou, X., Zhang, L., Su, Y., Gao, G., Liu, Y., Na, Z., & Chen, T. (2023). A space crawling robotic bio-paw (SCRBP) enabled by triboelectric sensors for surface identification. *Nano Energy*, 105, 108013. <https://doi.org/10.1016/j.nanoen.2022.108013>
- [25] Zhao, C., Wang, Y., Tang, G., Ru, J., Zhu, Z., Li, B., & Zhu, D. (2022). Ionic flexible sensors: Mechanisms, materials, structures, and applications. *Advanced Functional Materials*, 32(17), 2110417. <https://doi.org/10.1002/adfm.202110417>
- [26] Su, Q., Zou, Q., Li, Y., Chen, Y., Teng, S. Y., Kelleher, J. T., & Wang, S. (2021). A stretchable and strain-unperturbed pressure sensor for motion interference-free tactile monitoring on skins. *Science Advances*, 7(48), eabi4563. <https://doi.org/10.1126/sciadv.abi4563>
- [27] Ge, G., Zhang, Y., Shao, J., Wang, W., Si, W., Huang, W., & Dong, X. (2018). Stretchable, transparent, and self-patterned hydrogel-based pressure sensor for human motions detection. *Advanced Functional Materials*, 28(32), 1802576. <https://doi.org/10.1002/adfm.201802576>
- [28] Ling, Q., Liu, W., Liu, J., Zhao, L., Ren, Z., & Gu, H. (2022). Highly sensitive and robust polysaccharide-based composite hydrogel sensor integrated with underwater repeatable self-adhesion and rapid self-healing for human motion detection. *ACS Applied Materials & Interfaces*, 14(21), 24741–24754. <https://doi.org/10.1021/acsami.2c01785>
- [29] Li, X., He, L., Li, Y., Chao, M., Li, M., Wan, P., & Zhang, L. (2021). Healable, degradable, and conductive MXene nanocomposite hydrogel for multifunctional epidermal sensors. *ACS Nano*, 15(4), 7765–7773. <https://doi.org/10.1021/acsnano.1c01751>
- [30] Chen, J., Liu, F., Abdiryim, T., & Liu, X. (2024). An overview of conductive composite hydrogels for flexible electronic devices. *Advanced Composites and Hybrid Materials*, 7(2), 35. <https://doi.org/10.1007/s42114-024-00841-6>
- [31] Shao, B., Lu, M. H., Wu, T. C., Peng, W. C., Ko, T. Y., Hsiao, Y. C., & Lai, Y. C. (2024). Large-area, untethered, metamorphic, and omnidirectionally stretchable multiplexing self-powered triboelectric skins. *Nature Communications*, 15(1), 1238. <https://doi.org/10.1038/s41467-024-45611-6>
- [32] Chen, L., Chang, X., Wang, H., Chen, J., & Zhu, Y. (2022). Stretchable and transparent multimodal electronic-skin sensors in detecting strain, temperature, and humidity. *Nano Energy*, 96, 107077. <https://doi.org/10.1016/j.nanoen.2022.107077>
- [33] Chen, J., Zhu, Y., Chang, X., Pan, D., Song, G., Guo, Z., & Naik, N. (2021). Recent progress in essential functions of soft electronic skin. *Advanced Functional Materials*, 31(42), 2104686. <https://doi.org/10.1002/adfm.202104686>
- [34] Khan, Y., Ostfeld, A. E., Lochner, C. M., Pierre, A., & Arias, A. C. (2016). Monitoring of vital signs with flexible and wearable medical devices. *Advanced Materials*, 28(22), 4373–4395. <https://doi.org/10.1002/adma.201504366>
- [35] Lin, K., Li, Y., Sun, J., Zhou, D., & Zhang, Q. (2020). Multi-sensor fusion for body sensor network in medical human-robot interaction scenario. *Information Fusion*, 57, 15–26. <https://doi.org/10.1016/j.inffus.2019.11.001>
- [36] Zhang, T., Zhao, M., Zhai, M., Wang, L., Ma, X., Liao, S., & Chen, D. (2024). Improving the resolution of flexible large-area tactile sensors through machine-learning perception. *ACS Applied Materials & Interfaces*, 16(8), 11013–11025. <https://doi.org/10.1021/acsami.3c17880>



- [37] Jian, G., Yang, N., Zhu, S., Du, Y., & Wang, F. (2025). Highly-sensitive, absolute and self-powered triboelectric angular sensors for industrial robots. *Nano Energy*, 134, 110551. <https://doi.org/10.1016/j.nanoen.2024.110551>
- [38] Tian, L., Liu, T., Jiang, Y., He, B., & Hao, H. (2024). Multifunctional hydrogel sensor with Tough, self-healing capabilities and highly sensitive for motion monitoring and wound healing. *Chemical Engineering Journal*, 497, 154890. <https://doi.org/10.1016/j.cej.2024.154890>
- [39] Xue, J., Liu, D., Li, D., Hong, T., Li, C., Zhu, Z., & Zheng, Q. (2025). New carbon materials for multifunctional soft electronics. *Advanced Materials*, 37(2), 2312596. <https://doi.org/10.1002/adma.202312596>
- [40] Li, P., Zhao, X., Yan, Q., Xiong, J., Ding, R., Zheng, H., & He, X. (2024). Multifunctional tension-compression conversion sensing structure inspired by rotating stairs. *Chemical Engineering Journal*, 485, 149555. <https://doi.org/10.1016/j.cej.2024.149555>
- [41] Yang, W., Liu, S., Wang, Y., Liu, H., Liu, C., & Shen, C. (2024). Advances in multifunctional flexible MXene-based stress sensors. *Journal of Materials Chemistry C*, 12(22), 7845–7861. <https://doi.org/10.1039/D4TC01470G>
- [42] Lei, P., Bao, Y., Gao, L., Zhang, W., Zhu, X., Liu, C., & Ma, J. (2024). Bioinspired integrated multidimensional sensor for adaptive grasping by robotic hands and physical movement guidance. *Advanced Functional Materials*, 34(26), 2313787. <https://doi.org/10.1002/adfm.202313787>
- [43] Huang, Q., Jiang, Y., Duan, Z., Wu, Y., Yuan, Z., Zhang, M., & Tai, H. (2024). Ion gradient induced self-powered flexible pressure sensor. *Chemical Engineering Journal*, 490, 151660. <https://doi.org/10.1016/j.cej.2024.151660>
- [44] Qin, R., Nong, J., Wang, K., Liu, Y., Zhou, S., Hu, M., & Shan, G. (2024). Recent advances in flexible pressure sensors based on MXene materials. *Advanced Materials*, 36(24), 2312761. <https://doi.org/10.1002/adma.202312761>
- [45] Zhang, Y., Zhou, X., Zhang, N., Zhu, J., Bai, N., Hou, X., Guo, C. F. (2024). Ultrafast piezocapacitive soft pressure sensors with over 10 kHz bandwidth via bonded microstructured interfaces. *Nature Communications*, 15(1), 3048. <https://doi.org/10.1038/s41467-024-47408-z>
- [46] Lei, D., Liu, N., Su, T., Zhang, Q., Wang, L., Ren, Z., & Gao, Y. (2022). Roles of MXene in pressure sensing: Preparation, composite structure design, and mechanism. *Advanced Materials*, 34(52), 2110608. <https://doi.org/10.1002/adma.202110608>
- [47] Zhao, Y., Miao, L., Xiao, Y., & Sun, P. (2024). Research progress of flexible piezoresistive pressure sensor: A review. *IEEE Sensors Journal*, 24(20), 31624–31644. <https://doi.org/10.1109/JSEN.2024.3443423>
- [48] Chen, W., & Yan, X. (2020). Progress in achieving high-performance piezoresistive and capacitive flexible pressure sensors: A review. *Journal of Materials Science & Technology*, 43, 175–188. <https://doi.org/10.1016/j.jmst.2019.11.010>
- [49] Yang, Z., Pang, Y., Han, X., Yang, Y., Ling, J., Jian, M., & Ren, T. L. (2018). Graphene textile strain sensor with negative resistance variation for human motion detection. *ACS Nano*, 12(9), 9134–9141. <https://doi.org/10.1021/acsnano.8b03391>
- [50] Wang, S., Gao, F., Hu, Y., Zhang, S., Shang, H., Ge, C., & Hu, P. (2022). Skin-inspired tactile sensor based on gradient pore structure enable broad range response and ultrahigh pressure resolution. *Chemical Engineering Journal*, 443, 136446. <https://doi.org/10.1016/j.cej.2022.136446>
- [51] Yang, S., Yang, W., Yin, R., Liu, H., Sun, H., Pan, C., & Shen, C. (2023). Waterproof conductive fiber with microcracked synergistic conductive layer for high-performance tunable wearable strain sensor. *Chemical Engineering Journal*, 453, 139716. <https://doi.org/10.1016/j.cej.2022.139716>
- [52] Wu, J., Li, H., Lai, X., Chen, Z., & Zeng, X. (2020). Conductive and superhydrophobic F-rGO@CNTs/chitosan aerogel for piezoresistive pressure sensor. *Chemical Engineering Journal*, 386, 123998. <https://doi.org/10.1016/j.cej.2019.123998>
- [53] Qin, Z., Sun, X., Yu, Q., Zhang, H., Wu, X., Yao, M., & Li, J. (2020). Carbon nanotubes/hydrophobically associated hydrogels as ultrastretchable, highly sensitive, stable strain, and pressure sensors. *ACS Applied Materials & Interfaces*, 12(4), 4944–4953. <https://doi.org/10.1021/acsaami.9b21659>
- [54] Sun, Y., Liu, K., Bu, F., Meng, R., Xie, G., Guo, K., & Tu, L. (2024). Low-cost, reliable and flexible piezoresistive pressure sensors coated with single layer graphene and silver nanowires on three-dimensional polyurethane sponge. *Sensors and Actuators A: Physical*, 375, 115524. <https://doi.org/10.1016/j.sna.2024.115524>
- [55] Chen, X., Jin, J., Liu, B., Li, S., Guo, T., Sheng, Z., & Wu, H. (2024). Flexible and transparent leaf-vein electrodes fabricated by liquid film rupture self-assembly AgNWs for application of heaters and pressure sensors. *Chemical Engineering Journal*, 499, 156500. <https://doi.org/10.1016/j.cej.2024.156500>
- [56] Zhu, L., Xu, P., Chang, B., Ning, J., Yan, T., Yang, Z., & Lu, H. (2024). Hierarchical structure by self-sedimentation of liquid metal for flexible sensor integrating pressure detection and triboelectric nanogenerator. *Advanced Functional Materials*, 34(33), 2400363. <https://doi.org/10.1002/adfm.202400363>
- [57] Yuan, T., Yin, R., Li, C., Fan, Z., & Pan, L. (2024).  $\text{Ti}_3\text{C}_2\text{T}_x$  MXene-based all-resistive dual-mode sensor with near-zero temperature coefficient of resistance for crosstalk-free pressure and temperature detections. *Chemical Engineering Journal*, 487, 150396. <https://doi.org/10.1016/j.cej.2024.150396>
- [58] Luo, G., Xie, J., Liu, J., Zhang, Q., Luo, Y., Li, M., & Jiang, Z. (2023). Highly conductive, stretchable, durable, breathable electrodes based on electrospun polyurethane mats superficially decorated with carbon nanotubes for multifunctional wearable electronics. *Chemical Engineering Journal*, 451, 138549. <https://doi.org/10.1016/j.cej.2022.138549>
- [59] Tang, J., Zou, Y., Liu, C., & Lv, Y. (2024). Liquid Metal fiber-based high-sensitivity strain and pressure sensors enhanced by porous structure. *ACS Applied Electronic Materials*, 6(10), 7512–7521. <https://doi.org/10.1021/acsaem.4c01355>
- [60] Wang, S., Zhang, Z., Yang, B., Zhang, X., Shang, H., Jiang, L., ..., & Hu, P. (2023). High sensitivity tactile sensors with ultrabroad linear range based on gradient hybrid structure for gesture recognition and precise grasping. *Chemical Engineering Journal*, 457, 141136. <https://doi.org/10.1016/j.cej.2022.141136>
- [61] Ha, K. H., Huh, H., Li, Z., & Lu, N. (2022). Soft capacitive pressure sensors: Trends, challenges, and perspectives. *ACS Nano*, 16(3), 3442–3448. <https://doi.org/10.1021/acsnano.2c00308>
- [62] Qin, J., Yin, L., Hao, Y., Zhong, S., Zhang, D., Bi, K., ..., & Dang, Z. (2021). Flexible and stretchable capacitive sensors with different microstructures. *Advanced Materials*, 33(34), 2008267. <https://doi.org/10.1002/adma.202008267>
- [63] Wang, H., Li, Z., Liu, Z., Fu, J., Shan, T., Yang, X., & Li, D. (2022). Flexible capacitive pressure sensors for wearable electronics. *Journal of Materials Chemistry C*, 10(5), 1594–1605. <https://doi.org/10.1039/D1TC05304C>
- [64] Peng, S., Wu, S., Yu, Y., Xia, B., Lovell, N. H., & Wang, C. H. (2020). Multimodal capacitive and piezoresistive sensor for simultaneous measurement of multiple forces. *ACS Applied Materials & Interfaces*, 12(19), 22179–22190. <https://doi.org/10.1021/acsaami.0c04448>

- [65] Ma, L., Shuai, X., Hu, Y., Liang, X., Zhu, P., Sun, R., & Wong, C. (2018). A highly sensitive and flexible capacitive pressure sensor based on a micro-arrayed polydimethylsiloxane dielectric layer. *Journal of Materials Chemistry C*, 6(48), 13232–13240. <https://doi.org/10.1039/C8TC04297G>
- [66] An, B. W., Heo, S., Ji, S., Bien, F., & Park, J. U. (2018). Transparent and flexible fingerprint sensor array with multiplexed detection of tactile pressure and skin temperature. *Nature Communications*, 9(1), 2458. <https://doi.org/10.1038/s41467-018-04906-1>
- [67] He, Z., Chen, W., Liang, B., Liu, C., Yang, L., Lu, D., Gui, X. (2018). Capacitive pressure sensor with high sensitivity and fast response to dynamic interaction based on graphene and porous nylon networks. *ACS Applied Materials & Interfaces*, 10(15), 12816–12823. <https://doi.org/10.1021/acsami.8b01050>
- [68] Kurup, L. A., Arthur, J. N., & Yambem, S. D. (2022). Highly sensitive capacitive low-pressure graphene porous foam sensors. *ACS Applied Electronic Materials*, 4(8), 3962–3972. <https://doi.org/10.1021/acsaelm.2c00616>
- [69] Yang, J., Luo, S., Zhou, X., Li, J., Fu, J., Yang, W., & Wei, D. (2019). Flexible, tunable, and ultrasensitive capacitive pressure sensor with microconformal graphene electrodes. *ACS Applied Materials & Interfaces*, 11(16), 14997–15006. <https://doi.org/10.1021/acsami.9b02049>
- [70] Liu, Q., Liu, Y., Shi, J., Liu, Z., Wang, Q., & Guo, C. F. (2021). High-porosity foam-based iontronic pressure sensor with superhigh sensitivity of 9280 kPa<sup>-1</sup>. *Nano-Micro Letters*, 14(1), 21. <https://doi.org/10.1007/s40820-021-00770-9>
- [71] Sharma, S., Chhetry, A., Sharifuzzaman, M., Yoon, H., & Park, J. Y. (2020). Wearable capacitive pressure sensor based on MXene composite nanofibrous scaffolds for reliable human physiological signal acquisition. *ACS Applied Materials & Interfaces*, 12(19), 22212–22224. <https://doi.org/10.1021/acsami.0c05819>
- [72] Wang, P., Yu, W., Li, G., Meng, C., & Guo, S. (2023). Printable, flexible, breathable and sweatproof bifunctional sensors based on an all-nanofiber platform for fully decoupled pressure–temperature sensing application. *Chemical Engineering Journal*, 452, 139174. <https://doi.org/10.1016/j.cej.2022.139174>
- [73] Lv, C., Tian, C., Jiang, J., Dang, Y., Liu, Y., Duan, X., & Xie, M. (2023). Ultrasensitive linear capacitive pressure sensor with wrinkled microstructures for tactile perception. *Advanced Science*, 10(14), 2206807. <https://doi.org/10.1002/adv.202206807>
- [74] Luo, Y., Shao, J., Chen, S., Chen, X., Tian, H., Li, X., & Lu, B. (2019). Flexible capacitive pressure sensor enhanced by tilted micropillar arrays. *ACS Applied Materials & Interfaces*, 11(19), 17796–17803. <https://doi.org/10.1021/acsami.9b03718>
- [75] Tian, G., Deng, W., Yang, T., Zhang, J., Xu, T., Xiong, D., & Yang, W. (2024). Hierarchical piezoelectric composites for noninvasive continuous cardiovascular monitoring. *Advanced Materials*, 36(26), 2313612. <https://doi.org/10.1002/adma.202313612>
- [76] Seong, J., Bak, B. U., Lee, D., Jin, J., & Kim, J. (2024). Tribo-piezoelectric synergistic BaTiO<sub>3</sub>/PDMS micropyramidal structure for high-performance energy harvester and high-sensitivity tactile sensing. *Nano Energy*, 122, 109264. <https://doi.org/10.1016/j.nanoen.2024.109264>
- [77] Chen, Z., Wang, Z., Li, X., Lin, Y., Luo, N., Long, M., & Xu, J. B. (2017). Flexible piezoelectric-induced pressure sensors for static measurements based on nanowires/graphene heterostructures. *ACS Nano*, 11(5), 4507–4513. <https://doi.org/10.1021/acs.nano.6b08027>
- [78] Yi, Z., Liu, Z., Li, W., Ruan, T., Chen, X., Liu, J., & Zhang, W. (2022). Piezoelectric dynamics of arterial pulse for wearable continuous blood pressure monitoring. *Advanced Materials*, 34(16), 2110291. <https://doi.org/10.1002/adma.202110291>
- [79] Lu, L., Ding, W., Liu, J., & Yang, B. (2020). Flexible PVDF based piezoelectric nanogenerators. *Nano Energy*, 78, 105251. <https://doi.org/10.1016/j.nanoen.2020.105251>
- [80] Guo, W., Tan, C., Shi, K., Li, J., Wang, X. X., Sun, B., & Jiang, P. (2018). Wireless piezoelectric devices based on electrospun PVDF/BaTiO<sub>3</sub> NW nanocomposite fibers for human motion monitoring. *Nanoscale*, 10(37), 17751–17760. <https://doi.org/10.1039/C8NR05292A>
- [81] Wang, S., Shao, H. Q., Liu, Y., Tang, C. Y., Zhao, X., Ke, K., & Yang, W. (2021). Boosting piezoelectric response of PVDF-TrFE via MXene for self-powered linear pressure sensor. *Composites Science and Technology*, 202, 108600. <https://doi.org/10.1016/j.compscitech.2020.108600>
- [82] Ramadan, K. S., Sameoto, D., & Evoy, S. (2014). A review of piezoelectric polymers as functional materials for electromechanical transducers. *Smart Materials and Structures*, 23(3), 033001. <https://doi.org/10.1088/0964-1726/23/3/033001>
- [83] Fan, F. R., Tang, W., & Wang, Z. L. (2016). Flexible nanogenerators for energy harvesting and self-powered electronics. *Advanced Materials*, 28(22), 4283–4305. <https://doi.org/10.1002/adma.201504299>
- [84] Huang, Z. X., Li, L. W., Huang, Y. Z., Rao, W. X., Jiang, H. W., Wang, J., & Qu, J. P. (2024). Self-poled piezoelectric polymer composites via melt-state energy implantation. *Nature Communications*, 15(1), 819. <https://doi.org/10.1038/s41467-024-45184-4>
- [85] Gao, Q., Cheng, T., & Wang, Z. L. (2021). Triboelectric mechanical sensors—Progress and prospects. *Extreme Mechanics Letters*, 42, 101100. <https://doi.org/10.1016/j.eml.2020.101100>
- [86] Zhong, Y., Wang, J., Wu, L., Liu, K., Dai, S., Hua, J., & Ding, J. (2024). Dome-conformal electrode strategy for enhancing the sensitivity of BaTiO<sub>3</sub>-doped flexible self-powered triboelectric pressure sensor. *ACS Applied Materials & Interfaces*, 16(1), 1727–1736. <https://doi.org/10.1021/acsami.3c14015>
- [87] Xu, R., Luo, F., Zhu, Z., Li, M., & Chen, B. (2022). Flexible wide-range triboelectric sensor for physiological signal monitoring and human motion recognition. *ACS Applied Electronic Materials*, 4(8), 4051–4060. <https://doi.org/10.1021/acsaelm.2c00681>
- [88] Wang, J., Cui, P., Zhang, J., Ge, Y., Liu, X., Xuan, N., & Du, Z. (2021). A stretchable self-powered triboelectric tactile sensor with EGaIn alloy electrode for ultra-low-pressure detection. *Nano Energy*, 89, 106320. <https://doi.org/10.1016/j.nanoen.2021.106320>
- [89] Ippili, S., Jella, V., Lee, J. M., Jung, J. S., Lee, D. H., Yang, T. Y., & Yoon, S. G. (2022). ZnO–PTFE-based antimicrobial, anti-reflective display coatings and high-sensitivity touch sensors. *Journal of Materials Chemistry A*, 10(41), 22067–22079. <https://doi.org/10.1039/D2TA06095G>
- [90] Dong, K., Wu, Z., Deng, J., Wang, A. C., Zou, H., Chen, C., & Wang, Z. L. (2018). A stretchable yarn embedded triboelectric nanogenerator as electronic skin for biomechanical energy harvesting and multifunctional pressure sensing. *Advanced Materials*, 30(43), 1804944. <https://doi.org/10.1002/adma.201804944>
- [91] Wang, Z., Liu, Z., Zhao, G., Zhang, Z., Zhao, X., Wan, X., & Li, L. (2022). Stretchable unsymmetrical piezoelectric BaTiO<sub>3</sub> composite hydrogel for triboelectric nanogenerators

- and multimodal sensors. *ACS Nano*, 16(1), 1661–1670. <https://doi.org/10.1021/acsnano.1c10678>
- [92] Bai, N., Wang, L., Wang, Q., Deng, J., Wang, Y., Lu, P., & Guo, C. F. (2020). Graded intrafillable architecture-based iontronic pressure sensor with ultra-broad-range high sensitivity. *Nature Communications*, 11(1), 209. <https://doi.org/10.1038/s41467-019-14054-9>
- [93] Wen, K., Zhang, C., Zhang, G., Wang, M., Mei, G., Zhang, Z., & Zhou, X. (2024). Jellyfish-inspired artificial spider silk for luminous surgical sutures. *Advanced Materials*, 36(36), 2314158. <https://doi.org/10.1002/adma.202314158>
- [94] Wang, Y., Wang, L., Yang, T., Li, X., Zang, X., Zhu, M., . . . , & Zhu, H. (2014). Wearable and highly sensitive graphene strain sensors for human motion monitoring. *Advanced Functional Materials*, 24(29), 4666–4670. <https://doi.org/10.1002/adfm.201400379>
- [95] Pan, L., Chortos, A., Yu, G., Wang, Y., Isaacson, S., Allen, R., . . . , & Bao, Z. (2014). An ultra-sensitive resistive pressure sensor based on hollow-sphere microstructure induced elasticity in conducting polymer film. *Nature Communications*, 5(1), 3002. <https://doi.org/10.1038/ncomms4002>
- [96] Park, S., Kim, H., Vosgueritchian, M., Cheon, S., Kim, H., Koo, J. H., . . . , & Bao, Z. (2014). Stretchable energy-harvesting tactile electronic skin capable of differentiating multiple mechanical stimuli modes. *Advanced Materials*, 26(43), 7324–7332. <https://doi.org/10.1002/adma.201402574>
- [97] Lee, K. Y., Chun, J., Lee, J., Kim, K. N., Kang, N., Kim, J., . . . , & Kim, S. (2014). Hydrophobic sponge structure-based triboelectric nanogenerator. *Advanced Materials*, 26(29), 5037–5042. <https://doi.org/10.1002/adma.201401184>
- [98] Dagdeviren, C., Su, Y., Joe, P., Yona, R., Liu, Y., Kim, Y. S., . . . , & Rogers, J. A. (2014). Conformable amplified lead zirconate titanate sensors with enhanced piezoelectric response for cutaneous pressure monitoring. *Nature Communications*, 5(1), 4496. <https://doi.org/10.1038/ncomms5496>
- [99] Choi, W., Lee, J., Kyoung Yoo, Y., Kang, S., Kim, J., & Hoon Lee, J. (2014). Enhanced sensitivity of piezoelectric pressure sensor with microstructured polydimethylsiloxane layer. *Applied Physics Letters*, 104(12), 123701. <https://doi.org/10.1063/1.4869816>
- [100] Bai, P., Zhu, G., Jing, Q., Yang, J., Chen, J., Su, Y., . . . , & Wang, Z. L. (2014). Membrane-based self-powered triboelectric sensors for pressure change detection and its uses in security surveillance and healthcare monitoring. *Advanced Functional Materials*, 24(37), 5807–5813. <https://doi.org/10.1002/adfm.201401267>
- [101] Yang, Y., Zhou, Y. S., Zhang, H., Liu, Y., Lee, S., & Wang, Z. L. (2013). A single-electrode based triboelectric nanogenerator as self-powered tracking system. *Advanced Materials*, 25(45), 6594–6601. <https://doi.org/10.1002/adma.201302453>
- [102] Yang, J. C., Kim, J. O., Oh, J., Kwon, S. Y., Sim, J. Y., Kim, D. W., . . . , & Park, S. (2019). Microstructured porous pyramid-based ultrahigh sensitive pressure sensor insensitive to strain and temperature. *ACS Applied Materials & Interfaces*, 11(21), 19472–19480. <https://doi.org/10.1021/acsaami.9b03261>
- [103] Chen, X., Liu, H., Zheng, Y., Zhai, Y., Liu, X., Liu, C., . . . , & Shen, C. (2019). Highly compressible and robust polyimide/carbon nanotube composite aerogel for high-performance wearable pressure sensor. *ACS Applied Materials & Interfaces*, 11(45), 42594–42606. <https://doi.org/10.1021/acsaami.9b14688>
- [104] Ruth, S. R. A., Beker, L., Tran, H., Feig, V. R., Matsuhisa, N., & Bao, Z. (2020). Rational design of capacitive pressure sensors based on pyramidal microstructures for specialized monitoring of biosignals. *Advanced Functional Materials*, 30(29), 1903100. <https://doi.org/10.1002/adfm.201903100>
- [105] Park, D. Y., Joe, D. J., Kim, D. H., Park, H., Han, J. H., Jeong, C. K., . . . , & Lee, K. J. (2017). Self-powered real-time arterial pulse monitoring using ultrathin epidermal piezoelectric sensors. *Advanced Materials*, 29(37), 1702308. <https://doi.org/10.1002/adma.201702308>
- [106] Yao, G., Xu, L., Cheng, X., Li, Y., Huang, X., Guo, W., . . . , & Wu, H. (2020). Bioinspired triboelectric nanogenerators as self-powered electronic skin for robotic tactile sensing. *Advanced Functional Materials*, 30(6), 1907312. <https://doi.org/10.1002/adfm.201907312>
- [107] Yang, W., Liu, H., Du, H., Zhang, M., Wang, C., Yin, R., . . . , & Shen, C. (2023). Robust and superelastic spider web-like polyimide fiber-based conductive composite aerogel for extreme temperature-tolerant linear pressure sensor. *Science China Materials*, 66(7), 2829–2842. <https://doi.org/10.1007/s40843-022-2418-1>
- [108] Jia, B., Li, Z., Zheng, T., Wang, J., Zhao, Z. J., Zhao, L., . . . , & Jiang, Z. (2024). Highly-sensitive, broad-range, and highly-dynamic MXene pressure sensors with multi-level nano-microstructures for healthcare and soft robots applications. *Chemical Engineering Journal*, 485, 149750. <https://doi.org/10.1016/j.cej.2024.149750>
- [109] Dzuba, J., Vanko, G., Drzik, M., Ryger, I., Kutis, V., Zehetner, J., & Lalinsky, T. (2015). AlGaN/GaN diaphragm-based pressure sensor with direct high performance piezoelectric transduction mechanism. *Applied Physics Letters*, 107(12), 122102. <https://doi.org/10.1063/1.4931436>
- [110] Li, X., Wang, J., Liu, Y., Zhao, T., Luo, B., Liu, T., . . . , & Nie, S. (2024). Lightweight and strong cellulosic triboelectric materials enabled by cell wall nanoengineering. *Nano Letters*, 24(10), 3273–3281. <https://doi.org/10.1021/acs.nanolett.4c00458>
- [111] Li, S., Xiao, P., Zhou, W., Liang, Y., Kuo, S. W., & Chen, T. (2022). Bioinspired nanostructured superwetting thin-films in a self-supported form enabled “miniature umbrella” for weather monitoring and water rescue. *Nano-Micro Letters*, 14(1), 32. <https://doi.org/10.1007/s40820-021-00775-4>
- [112] Shi, L., Li, Z., Chen, M., Zhu, T., & Wu, L. (2023). Ultrasensitive and ultraprecise pressure sensors for soft systems. *Advanced Materials*, 35(10), 2210091. <https://doi.org/10.1002/adma.202210091>
- [113] Fang, Y., Li, Y., Wang, X., Zhou, Z., Zhang, K., Zhou, J., & Hu, B. (2020). Cryo-transferred ultrathin and stretchable epidermal electrodes. *Small*, 16(28), 2000450. <https://doi.org/10.1002/sml.202000450>
- [114] Chang, X. (2023). A wearable electronic based on flexible pressure sensor for running motion monitoring. *Discover Nano*, 18(1), 28. <https://doi.org/10.1186/s11671-023-03788-7>
- [115] Zhang, X., Dai, H., Ji, M., Han, Y., Jiang, B., Cheng, C., . . . , & Wu, G. (2025). A flexible piezoresistive strain sensor based on AgNWs/MXene/PDMS sponge. *Journal of Materials Science: Materials in Electronics*, 36(8), 452. <https://doi.org/10.1007/s10854-025-14494-8>
- [116] Sun, Y. W., Men, H. J., Zhang, Z., & Li, J. C. (2025). Effect of temperature on the bending fatigue of flexible PDMS/MXene pressure sensor with cilia array. *Journal of the Korean Ceramic Society*, 62(1), 233–241. <https://doi.org/10.1007/s43207-024-00462-1>
- [117] Gan Jet Hong, M., Ni, Q. Q., & Natsuki, T. (2014). Behavior of polymer-based electroactive actuator incorporated with mild



- hydrothermally treated CNTs. *Applied Physics A*, 117(4), 2043–2050. <https://doi.org/10.1007/s00339-014-8616-8>
- [118] Zhao, S. Q., Zheng, P. X., Cong, H. L., & Wan, A. L. (2021). Facile fabrication of flexible strain sensors with AgNPs-decorated CNTs based on nylon/PU fabrics through polydopamine templates. *Applied Surface Science*, 558, 149931. <https://doi.org/10.1016/j.apsusc.2021.149931>
- [119] Fan, H., Li, Q., Li, K., Hou, C., Zhang, Q., Li, Y., & Wang, H. (2020). Stretchable electrochromic fibers based on hierarchical porous structures with electrically conductive dual-pathways. *Science China Materials*, 63(12), 2582–2589. <https://doi.org/10.1007/s40843-020-1404-y>
- [120] Zhu, G. J., Ren, P. G., Wang, J., Duan, Q., Ren, F., Xia, W. M., & Yan, D. X. (2020). A highly sensitive and broad-range pressure sensor based on polyurethane mesodome arrays embedded with silver nanowires. *ACS Applied Materials & Interfaces*, 12(17), 19988–19999. <https://doi.org/10.1021/acsami.0c03697>
- [121] Hou, Z., He, Y., Qu, L., Zhang, X., Fan, T., & Miao, J. (2024). Core–sheath heterogenous interlocked stretchable conductive fiber induced by adhesive MXene modulated interfacial soldering. *Nano Letters*, 24(47), 15142–15150. <https://doi.org/10.1021/acs.nanolett.4c04731>
- [122] Chang, K., Guo, M., Pu, L., Dong, J., Li, L., Ma, P., . . . , & Liu, T. (2023). Wearable nanofibrous tactile sensors with fast response and wireless communication. *Chemical Engineering Journal*, 451, 138578. <https://doi.org/10.1016/j.cej.2022.138578>
- [123] Kang, F., Zhang, W., Liu, M., Liu, F., Jia, Z., & Jia, D. (2022). Highly flexible and sensitive  $\text{Ti}_3\text{C}_2$  MXene@polyurethane composites for piezoresistive pressure sensor. *Journal of Materials Science*, 57(27), 12894–12902. <https://doi.org/10.1007/s10853-022-07387-2>
- [124] Chen, Y., Gao, M., Chen, K., Sun, H., Xing, H., Liu, X., . . . , & Guo, H. (2024). MXene-based pressure sensor with a self-healing property for joule heating and friction sliding. *Small*, 20(33), 2400593. <https://doi.org/10.1002/smll.202400593>
- [125] He, Y., Zhou, M., Mahmoud, M. H. H., Lu, X., He, G., Zhang, L., . . . , & Azab, I. H. E. (2022). Multifunctional wearable strain/pressure sensor based on conductive carbon nanotubes/silk nonwoven fabric with high durability and low detection limit. *Advanced Composites and Hybrid Materials*, 5(3), 1939–1950. <https://doi.org/10.1007/s42114-022-00525-z>
- [126] Wang, M., Wang, G. D., Xu, C. Y., Liu, W. D., Liu, L., Ma, Y., Lv, W. W., Guo, J. X. (2024). High-performance flexible porous composites based on Bioinspired gradient design for wide-range pressure monitoring. *Chemical Engineering Journal*. <https://doi.org/10.1016/j.cej.2024.158594>
- [127] Liang, X., Li, H., Dou, J., Wang, Q., He, W., Wang, C., . . . , & Zhang, Y. (2020). Stable and biocompatible carbon nanotube ink mediated by silk protein for printed electronics. *Advanced Materials*, 32(31), 2000165. <https://doi.org/10.1002/adma.202000165>
- [128] Wen, D. L., Pang, Y. X., Huang, P., Wang, Y. L., Zhang, X. R., Deng, H. T., & Zhang, X. S. (2022). Silk fibroin-based wearable all-fiber multifunctional sensor for smart clothing. *Advanced Fiber Materials*, 4(4), 873–884. <https://doi.org/10.1007/s42765-022-00150-x>
- [129] He, X., Zhou, N., Li, Y., Xiong, P., Zhang, S., & Ma, Z. (2023). An electrically stable and mechanically robust stretchable fiber conductor prepared by dip-coating silver nanowires on porous elastomer yarn. *Materials Advances*, 4(8), 1978–1988. <https://doi.org/10.1039/D3MA00013C>
- [130] Chen, S., Liu, S., Wang, P., Liu, H., & Liu, L. (2018). Highly stretchable fiber-shaped e-textiles for strain/pressure sensing, full-range human motions detection, health monitoring, and 2D force mapping. *Journal of Materials Science*, 53(4), 2995–3005. <https://doi.org/10.1007/s10853-017-1644-y>
- [131] Qin, W., Xue, Y., Li, G., Peng, H., Gong, G., Yan, R., . . . , & Pang, J. (2024). Highly-sensitive wearable pressure sensor based on AgNWs/MXene/non-woven fabric. *Organic Electronics*, 125, 106958. <https://doi.org/10.1016/j.orgel.2023.106958>
- [132] Yao, D. J., Tang, Z., Zhang, L., Liu, Z. G., Sun, Q. J., Hu, S. C., . . . , & Ouyang, J. (2021). A highly sensitive, foldable and wearable pressure sensor based on MXene-coated airlaid paper for electronic skin. *Journal of Materials Chemistry C*, 9(37), 12642–12649. <https://doi.org/10.1039/D1TC02458B>
- [133] Yu, Q., Su, C., Bi, S., Huang, Y., Li, J., Shao, H., . . . , & Chen, N. (2022).  $\text{Ti}_3\text{C}_2\text{T}_x$ @nonwoven fabric composite: Promising MXene-coated fabric for wearable piezoresistive pressure sensors. *ACS Applied Materials & Interfaces*, 14(7), 9632–9643. <https://doi.org/10.1021/acsami.2c00980>
- [134] Han, L., Qu, R., Chen, D., Liu, L., Xu, H., Zhang, Z., . . . , & Song, X. (2022). Carbon nanotube anchored organic hydrogel for soft sensors. *Macromolecular Materials and Engineering*, 307(7), 2100890. <https://doi.org/10.1002/mame.202100890>
- [135] Zhou, G., Byun, J. H., Oh, Y., Jung, B. M., Cha, H. J., Seong, D. G., . . . , & Chou, T. W. (2017). Highly sensitive wearable textile-based humidity sensor made of high-strength, single-walled carbon nanotube/poly(vinyl alcohol) filaments. *ACS Applied Materials & Interfaces*, 9(5), 4788–4797. <https://doi.org/10.1021/acsami.6b12448>
- [136] Li, W., Tao, L. Q., Kang, M. C., Li, C. H., Luo, C. Y., He, G., . . . , & Wang, P. (2022). Tunable mechanical, self-healing hydrogels driven by sodium alginate and modified carbon nanotubes for health monitoring. *Carbohydrate Polymers*, 295, 119854. <https://doi.org/10.1016/j.carbpol.2022.119854>
- [137] Hua, M., Wu, S., Jin, Y., Zhao, Y., Yao, B., & He, X. (2021). Tough-hydrogel reinforced low-tortuosity conductive networks for stretchable and high-performance supercapacitors. *Advanced Materials*, 33(26), 2100983. <https://doi.org/10.1002/adma.202100983>
- [138] Wen, L., Xie, D., Wu, J., Liang, Y., Zhang, Y., Li, J., . . . , & Lin, B. (2022). Humidity/sweat-sensitive electronic skin with antibacterial, antioxidation, and ultraviolet-proof functions constructed by a cross-linked network. *ACS Applied Materials & Interfaces*, 14(50), 56074–56086. <https://doi.org/10.1021/acsami.2c15876>
- [139] Albano, L. G. S., Paulin, J. V., Trino, L. D., Fernandes, S. L., & Graeff, C. F. O. (2019). Ultraviolet-protective thin film based on PVA–melanin/rod-coated silver nanowires and its application as a transparent capacitor. *Journal of Applied Polymer Science*, 136(30), 47805. <https://doi.org/10.1002/app.47805>
- [140] Qin, R., Li, X., Hu, M., Shan, G., Seeram, R., & Yin, M. (2022). Preparation of high-performance MXene/PVA-based flexible pressure sensors with adjustable sensitivity and sensing range. *Sensors and Actuators A: Physical*, 338, 113458. <https://doi.org/10.1016/j.sna.2022.113458>
- [141] Kallingal, N., Maurya, M. R., Sajna, M. S., Yalcin, H. C., Ouakad, H. M., Bahadur, I., . . . , & Sadasivuni, K. K. (2022). A highly sensitive wearable pressure sensor capsule based on PVA/Mxene composite gel. *3 Biotech*, 12(8), 171. <https://doi.org/10.1007/s13205-022-03221-3>
- [142] Chen, Y. D., Yang, G. H., Li, Y. Y., Li, Z. P., Ma, L. M., Yang, S. R., & Wang, J. Q. (2022). Temperature-adaptable pressure



- sensors based on MXene-coated GO hierarchical aerogels with superb detection capability. *Carbon*, 200, 47–55. <https://doi.org/10.1016/j.carbon.2022.08.002>
- [143] Han, S., Liu, C., Lin, X., Zheng, J., Wu, J., & Liu, C. (2020). Dual conductive network hydrogel for a highly conductive, self-healing, anti-freezing, and non-drying strain sensor. *ACS Applied Polymer Materials*, 2(2), 996–1005. <https://doi.org/10.1021/acsapm.9b01198>
- [144] Chen, J., Hou, R., Li, S., Sun, C., Peng, K., Dai, Y., & Chen, X. (2024). PAM/CNTs-Au microcrack sensor with high sensitivity and wide detection range for multi-scale human motion detection. *Sensors and Actuators A: Physical*, 370, 115203. <https://doi.org/10.1016/j.sna.2024.115203>
- [145] Huang, X., Wang, L., Shen, Z., Ren, J., Chen, G., Li, Q., & Zhou, Z. (2022). Super-stretchable and self-healing hydrogel with a three-dimensional silver nanowires network structure for wearable sensor and electromagnetic interference shielding. *Chemical Engineering Journal*, 446, 137136. <https://doi.org/10.1016/j.cej.2022.137136>
- [146] Sun, S., & Maimaitiyming, X. (2023). Silver nanowire/polyacrylamide/gelatin flexible stress, strain and temperature sensor. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 675, 131919. <https://doi.org/10.1016/j.colsurfa.2023.131919>
- [147] Zhang, L., Wang, J., Wang, S., Wang, L., & Wu, M. (2022). Neuron-inspired multifunctional conductive hydrogels for flexible wearable sensors. *Journal of Materials Chemistry C*, 10(11), 4327–4335. <https://doi.org/10.1039/D1TC05864A>
- [148] Wang, H., Zou, Y., Ji, Y., Zhong, K., Du, X., Du, Z., . . . , & Wang, S. (2022). Tough and extremely temperature-tolerance nanocomposite organohydrogels as ultrasensitive wearable sensors for wireless human motion monitoring. *Composites Part A: Applied Science and Manufacturing*, 157, 106905. <https://doi.org/10.1016/j.compositesa.2022.106905>
- [149] Guo, B. Y., He, S. S., Yao, M. M., Tan, Z. Y., & Li, J. J. (2023). MXene-containing anisotropic hydrogels strain sensors with enhanced sensing performance for human motion monitoring and wireless transmission. *Chemical Engineering Journal*, 461, 142099. <https://doi.org/10.1016/j.cej.2023.142099>
- [150] Liao, H., Guo, X., Wan, P., & Yu, G. (2019). Conductive MXene nanocomposite organohydrogel for flexible, healable, low-temperature tolerant strain sensors. *Advanced Functional Materials*, 29(39), 1904507. <https://doi.org/10.1002/adfm.201904507>
- [151] Nie, B., Xing, S., Brandt, J. D., & Pan, T. (2012). Droplet-based interfacial capacitive sensing. *Lab on a Chip*, 12(6), 1110–1118. <https://doi.org/10.1039/C2LC21168H>
- [152] Sun, J. Y., Keplinger, C., Whitesides, G. M., & Suo, Z. (2014). Ionic skin. *Advanced Materials*, 26(45), 7608–7614. <https://doi.org/10.1002/adma.201403441>
- [153] Nie, B., Li, R., Brandt, J. D., & Pan, T. (2014). Iontronic microdroplet array for flexible ultrasensitive tactile sensing. *Lab on a Chip*, 14(6), 1107–1116. <https://doi.org/10.1039/C3LC50994J>
- [154] Nie, B., Li, R., Cao, J., Brandt, J. D., & Pan, T. (2015). Flexible transparent iontronic film for interfacial capacitive pressure sensing. *Advanced Materials*, 27(39), 6055–6062. <https://doi.org/10.1002/adma.201502556>
- [155] Zhu, Z., Li, R., & Pan, T. (2018). Imperceptible epidermal-iontronic interface for wearable sensing. *Advanced Materials*, 30(6), 1705122. <https://doi.org/10.1002/adma.201705122>
- [156] Choi, D., Jang, S., Kim, J. S., Kim, H. J., Kim, D. H., & Kwon, J. Y. (2019). A highly sensitive tactile sensor using a pyramid-plug structure for detecting pressure, shear force, and torsion. *Advanced Materials Technologies*, 4(3), 1800284. <https://doi.org/10.1002/admt.201800284>
- [157] Shen, Z., Zhu, X., Majidi, C., & Gu, G. (2021). Cutaneous ionogel mechanoreceptors for soft machines, physiological sensing, and amputee prostheses. *Advanced Materials*, 33(38), 2102069. <https://doi.org/10.1002/adma.202102069>
- [158] Zhu, P., Du, H., Hou, X., Lu, P., Wang, L., Huang, J., & Guo, C. F. (2021). Skin-electrode iontronic interface for mechanosensing. *Nature Communications*, 12(1), 4731. <https://doi.org/10.1038/s41467-021-24946-4>
- [159] Niu, H., Li, H., Gao, S., Li, Y., Wei, X., Chen, Y., & Shen, G. (2022). Perception-to-cognition tactile sensing based on artificial-intelligence-motivated human full-skin bionic electronic skin. *Advanced Materials*, 34(31), 2202622. <https://doi.org/10.1002/adma.202202622>
- [160] Xu, R., She, M., Liu, J., Zhao, S., Zhao, J., Zhang, X., & Tian, M. (2023). Skin-friendly and wearable iontronic touch panel for virtual-real handwriting interaction. *ACS Nano*, 17(9), 8293–8302. <https://doi.org/10.1021/acs.nano.2c12612>
- [161] Li, N., Wang, Z., Yang, X., Zhang, Z., Zhang, W., Sang, S., & Zhang, H. (2024). Deep-learning-assisted thermogalvanic hydrogel e-skin for self-powered signature recognition and biometric authentication. *Advanced Functional Materials*, 34(18), 2314419. <https://doi.org/10.1002/adfm.202314419>
- [162] Tee, B. C. K., Chortos, A., Dunn, R. R., Schwartz, G., Eason, E., & Bao, Z. (2014). Tunable flexible pressure sensors using microstructured elastomer geometries for intuitive electronics. *Advanced Functional Materials*, 24(34), 5427–5434. <https://doi.org/10.1002/adfm.201400712>
- [163] Liu, R., Ji, B., Lei, M., Hu, F., & Zhou, B. (2023). Simultaneous optimization of sensitivity and linearity for flexible pressure sensor via coupling effect between microstructures and flat substrate component. *ACS Applied Electronic Materials*, 5(12), 6918–6928. <https://doi.org/10.1021/acsaelm.3c01346>
- [164] Xu, L., Liu, C., Ma, X., Xu, Y., Zhou, W., Guan, W., . . . , & Liu, B. (2023). Two-birds-one-stone: Flexible PANI film with bionic microstructures for multifunctional sensing of physical and chemical stimuli. *Chemical Engineering Journal*, 451, 138820. <https://doi.org/10.1016/j.cej.2022.138820>
- [165] Liu, H., Xu, T., Cai, C., Liu, K., Liu, W., Zhang, M., & Zhang, K. (2022). Multifunctional superelastic, superhydrophilic, and ultralight nanocellulose-based composite carbon aerogels for compressive supercapacitor and strain sensor. *Advanced Functional Materials*, 32(26), 2113082. <https://doi.org/10.1002/adfm.202113082>
- [166] Cao, W., Luo, Y., Dai, Y., Wang, X., Wu, K., Lin, H., & Zhu, J. (2023). Piezoresistive pressure sensor based on a conductive 3D sponge network for motion sensing and human-machine interface. *ACS Applied Materials & Interfaces*, 15(2), 3131–3140. <https://doi.org/10.1021/acsami.2c18203>
- [167] Stevens, M., Yun, G., & Hasan, T. (2024). Porous conductive hybrid composite with superior pressure sensitivity and dynamic range. *Advanced Functional Materials*, 34(8), 2309347. <https://doi.org/10.1002/adfm.202309347>
- [168] Chen, X., Li, R., Niu, G., Xin, M., Xu, G., Cheng, H., & Yang, L. (2022). Porous graphene foam composite-based dual-mode sensors for underwater temperature and subtle motion

- detection. *Chemical Engineering Journal*, 444, 136631. <https://doi.org/10.1016/j.cej.2022.136631>
- [169] Ma, Y., Li, Z., Tu, S., Zhu, T., Xu, W., Chen, M., & Wu, L. (2024). An asymmetric interlocked structure with modulus gradient for ultrawide piezocapacitive pressure sensing applications. *Advanced Functional Materials*, 34(8), 2309792. <https://doi.org/10.1002/adfm.202309792>
- [170] Huang, F., Hu, G., Yu, Z., Pan, Y., Yao, H., Tang, C., & Zhang, H. (2023). Highly sensitive and wide linearity flexible pressure sensor with randomly distributed columnar arrays. *Journal of Materials Science*, 58(8), 3735–3751. <https://doi.org/10.1007/s10853-023-08282-0>
- [171] Lu, L. S., Zhao, Y. H., Lin, N., & Xie, Y. X. (2023). Skin-inspired flexible pressure sensor with hierarchical interlocked spinosum microstructure by laser direct writing for high sensitivity and large linearity. *Sensors and Actuators A: Physical*, 366(1), 114988. <https://doi.org/10.1016/j.sna.2023.114988>
- [172] Qiu, Z., Wan, Y., Zhou, W., Yang, J., Yang, J., Huang, J., & Guo, C. F. (2018). Ionic skin with biomimetic dielectric layer templated from *calathea zebrina* leaf. *Advanced Functional Materials*, 28(37), 1802343. <https://doi.org/10.1002/adfm.201802343>
- [173] Tang, J., Zhao, C., Luo, Q., Chang, Y., Yang, Z., & Pan, T. (2022). Ultrahigh-transparency and pressure-sensitive iontronic device for tactile intelligence. *npj Flexible Electronics*, 6(1), 54. <https://doi.org/10.1038/s41528-022-00162-y>
- [174] Guo, Y., Li, H., Li, Y., Wei, X., Gao, S., Yue, W., & Shen, G. (2022). Wearable hybrid device capable of interactive perception with pressure sensing and visualization. *Advanced Functional Materials*, 32(44), 2203585. <https://doi.org/10.1002/adfm.202203585>
- [175] Guo, Y., Yin, F., Li, Y., Shen, G., & Lee, J. (2023). Incorporating wireless strategies to wearable devices enabled by a photocurable hydrogel for monitoring pressure information. *Advanced Materials*, 35(29), 2300855. <https://doi.org/10.1002/adma.202300855>
- [176] Bai, N., Wang, L., Xue, Y., Wang, Y., Hou, X., Li, G., & Guo, C. F. (2022). Graded interlocks for iontronic pressure sensors with high sensitivity and high linearity over a broad range. *ACS Nano*, 16(3), 4338–4347. <https://doi.org/10.1021/acsnano.1c10535>
- [177] He, W., Guo, X., Xia, P., Lu, S., Zhang, Y., & Fan, H. (2023). Temperature and pressure sensitive ionic conductive triple-network hydrogel for high-durability dual signal sensors. *Journal of Colloid and Interface Science*, 647, 456–466. <https://doi.org/10.1016/j.jcis.2023.05.149>
- [178] Li, G., Liu, S., Wang, L., & Zhu, R. (2020). Skin-inspired quadruple tactile sensors integrated on a robot hand enable object recognition. *Science Robotics*, 5(49), eabc8134. <https://doi.org/10.1126/scirobotics.abc8134>
- [179] Zhao, S., & Zhu, R. (2017). Electronic skin with multifunction sensors based on thermosensation. *Advanced Materials*, 29(15), 1606151. <https://doi.org/10.1002/adma.201606151>
- [180] Liu, Y., Tao, J., Mo, Y., Bao, R., & Pan, C. (2024). Ultrasensitive touch sensor for simultaneous tactile and slip sensing. *Advanced Materials*, 36(21), 2313857. <https://doi.org/10.1002/adma.202313857>
- [181] Roudaut, Y., Lonigro, A., Coste, B., Hao, J., Delmas, P., & Crest, M. (2012). Touch sense: Functional organization and molecular determinants of mechanosensitive receptors. *Channels*, 6(4), 234–245. <https://doi.org/10.4161/chan.22213>
- [182] Gueorguiev, D., Vezzoli, E., Mouraux, A., Lemaire-Semail, B., & Thonnard, J. L. (2017). The tactile perception of transient changes in friction. *Journal of the Royal Society Interface*, 14(137), 20170641. <https://doi.org/10.1098/rsif.2017.0641>
- [183] Liu, W., Duo, Y., Liu, J., Yuan, F., Li, L., Li, L., & Wen, L. (2022). Touchless interactive teaching of soft robots through flexible bimodal sensory interfaces. *Nature Communications*, 13(1), 5030. <https://doi.org/10.1038/s41467-022-32702-5>
- [184] Lai, Y., Deng, J., Liu, R., Hsiao, Y., Zhang, S. L., Peng, W., ..., & Wang, Z. L. (2018). Actively perceiving and responsive soft robots enabled by self-powered, highly extensible, and highly sensitive triboelectric proximity- and pressure-sensing skins. *Advanced Materials*, 30(28), 1801114. <https://doi.org/10.1002/adma.201801114>
- [185] Ding, H., Wu, Z., Wang, H., Zhou, Z., Wei, Y., Tao, K., & Wu, J. (2022). An ultrastretchable, high-performance, and crosstalk-free proximity and pressure bimodal sensor based on ionic hydrogel fibers for human-machine interfaces. *Materials Horizons*, 9(7), 1935–1946. <https://doi.org/10.1039/D2MH00281G>
- [186] Ren, Y., Liu, Z., Jin, G., Yang, M., Shao, Y., Li, W., ..., & Yan, F. (2021). Electric-field-induced gradient ionogels for highly sensitive, broad-range-response, and freeze/heat-resistant ionic fingers. *Advanced Materials*, 33(12), 2008486. <https://doi.org/10.1002/adma.202008486>
- [187] Chen, J., Zhu, G., Wang, J., Chang, X., & Zhu, Y. (2023). Multifunctional iontronic sensor based on liquid metal-filled hollow ionogel fibers in detecting pressure, temperature, and proximity. *ACS Applied Materials & Interfaces*, 15(5), 7485–7495. <https://doi.org/10.1021/acsami.2c22835>
- [188] Zhu, M., Sun, Z., Zhang, Z., Shi, Q., He, T., Liu, H., ..., & Lee, C. (2020). Haptic-feedback smart glove as a creative human-machine interface (HMI) for virtual/augmented reality applications. *Science Advances*, 6(19), eaaz8693. <https://doi.org/10.1126/sciadv.aaz8693>
- [189] Ge, C., An, X., He, X., Duan, Z., Chen, J., Hu, P., & Zhang, J. (2023). Integrated multifunctional electronic skins with low-coupling for complicated and accurate human-robot collaboration. *Advanced Science*, 10(20), 2301341. <https://doi.org/10.1002/advs.202301341>
- [190] Zhang, H., Chen, H., Lee, J., Kim, E., Chan, K., Venkatesan, H., ..., & Kim, J. (2022). Bioinspired chromotropic ionic skin with in-plane strain/temperature/pressure multimodal sensing and ultrahigh stimuli discriminability. *Advanced Functional Materials*, 32(47), 2208362. <https://doi.org/10.1002/adfm.202208362>
- [191] Sundaram, S., Kellnhofer, P., Li, Y., Zhu, J. Y., Torralba, A., & Matusik, W. (2019). Learning the signatures of the human grasp using a scalable tactile glove. *Nature*, 569(7758), 698–702. <https://doi.org/10.1038/s41586-019-1234-z>
- [192] Shi, J., Dai, Y., Cheng, Y., Xie, S., Li, G., Liu, Y., ..., & Guo, C. F. (2023). Embedment of sensing elements for robust, highly sensitive, and cross-talk-free iontronic skins for robotics applications. *Science Advances*, 9(9), eadf8831. <https://doi.org/10.1126/sciadv.adf8831>
- [193] Qu, X., Liu, Z., Tan, P., Wang, C., Liu, Y., Feng, H., ..., & Wang, Z. L. (2022). Artificial tactile perception smart finger for material identification based on triboelectric sensing. *Science Advances*, 8(31), eabq2521. <https://doi.org/10.1126/sciadv.abq2521>

- [194] Qiu, Y., Sun, S., Wang, X., Shi, K., Wang, Z., Ma, X., . . . , & Wu, H. (2022). Nondestructive identification of softness via bioinspired multisensory electronic skins integrated on a robotic hand. *npj Flexible Electronics*, 6(1), 45. <https://doi.org/10.1038/s41528-022-00181-9>
- [195] Yu, Y., Li, J., Solomon, S. A., Min, J., Tu, J., Guo, W., . . . , & Gao, W. (2022). All-printed soft human-machine interface for robotic physicochemical sensing. *Science Robotics*, 7(67), eabn0495. <https://doi.org/10.1126/scirobotics.abn0495>
- [196] Liu, Y., Yiu, C., Song, Z., Huang, Y., Yao, K., Wong, T., . . . , & Yu, X. (2022). Electronic skin as wireless human-machine interfaces for robotic VR. *Science Advances*, 8(2), eabl6700. <https://doi.org/10.1126/sciadv.abl6700>
- [197] Hua, Q., Sun, J., Liu, H., Bao, R., Yu, R., Zhai, J., . . . , & Wang, Z. L. (2018). Skin-inspired highly stretchable and conformable matrix networks for multifunctional sensing. *Nature Communications*, 9(1), 244. <https://doi.org/10.1038/s41467-017-02685-9>
- [198] Wei, X., Wang, B., Wu, Z., & Wang, Z. L. (2022). An open-environment tactile sensing system: Toward simple and efficient material identification. *Advanced Materials*, 34(29), 2203073. <https://doi.org/10.1002/adma.202203073>
- [199] Flavin, M. T., Ha, K.-H., Guo, Z., Li, S., Kim, J.-T., Saxena, T., . . . , & Rogers, J. A. (2024). Bioelastic state recovery for haptic sensory substitution. *Nature*, 635(8038), 345–352. <https://doi.org/10.1038/s41586-024-08155-9>
- [200] Liu, Y., Wang, J., Liu, T., Wei, Z., Luo, B., Chi, M., . . . , & Nie, S. (2025). Triboelectric tactile sensor for pressure and temperature sensing in high-temperature applications. *Nature Communications*, 16(1), 383. <https://doi.org/10.1038/s41467-024-55771-0>
- [201] Yiu, C., Liu, Y., Park, W., Li, J., Huang, X., Yao, K., . . . , & Yu, X. (2025). Skin-interfaced multimodal sensing and tactile feedback system as enhanced human-machine interface for closed-loop drone control. *Science Advances*, 11(13), eadt6041. <https://doi.org/10.1126/sciadv.adt6041>
- [202] Xu, G., Wang, H., Zhao, G., Fu, J., Yao, K., Jia, S., . . . , & Yu, X. (2025). Self-powered electrotactile textile haptic glove for enhanced human-machine interface. *Science Advances*, 11(12), eadt0318. <https://doi.org/10.1126/sciadv.adt0318>

**How to Cite:** Ren, H., Li, W., Ding, Y., Feng, Y., Li, H., Li, J., . . . , & Hu, P. A. (2025). Flexible Tactile Sensors for Enhancing Robotic Perception. *Smart Wearable Technology*. <https://doi.org/10.47852/bonviewSWT52025770>